

# THERMOROSSI

*Fire Lovers*

## SKYLINE – PANORAMA – FULLMOON – MOONLIGHT – TRILOGIE

ITA - MANUALE DI INSTALLAZIONE, USO E MANUTENZIONE.

FRA - MANUEL D'INSTALLATION, D'UTILISATION ET D'ENTRETIEN.

ENG - INSTALLATION, USE AND MAINTENANCE GUIDE.

DEU - INSTALLATIONS-, BETRIEBS- UND WARTUNGSANLEITUNG.

ESP - MANUAL DE INSTALACIÓN, USO Y MANTENIMIENTO.

NL - HANDLEIDING VOOR INSTALLATIE. GEBRUIK EN ONDERHOUD.



ITA - Informazioni importanti per la sicurezza ed il corretto funzionamento.

FRA – À lire impérativement! Informations importantes pour la sécurité et le bon fonctionnement.

ENG - Must read! Important information for safety and correct operation.

DEU - Unbedingt lesen! Wichtige Informationen zur Sicherheit und zum sicheren Betrieb.

ESP - ¡Leer! Informaciones importantes para la seguridad y el correcto funcionamiento.

NL - Belangrijke informatie voor de veiligheid en de correcte werking.



**INDEX**

1 – INTRODUCTION.....20  
 2 – TECHNICAL CHARACTERISTICS.....22  
 3 – GENERAL DESCRIPTION .....38  
 4 – INSTALLATION.....41  
 5 - USE OF THE APPLIANCE.....55  
 6 – CLEANING AND MAINTENANCE .....58  
 7 – SMOKE EXHAUST TUBE .....60  
 8 – PROBLEMS, CAUSES AND SOLUTIONS.....62  
 9 – WARRANTY TERMS AND CONDITIONS.....63

**EU Declaration of Conformity (DoC) / Dichiarazione di Conformità UE (DoC)**

|   |                            |  |                          |
|---|----------------------------|--|--------------------------|
| <b>Company name:</b><br>Azienda:              | <b>THERMOROSSI S.P.A.</b>  | <b>Postal address:</b><br>Indirizzo:     | <b>VIA GRUMOLO, N° 4</b> |
| Postcode and city:<br>Codice postale e città: | <b>36011 ARSIERO (VI)</b>  | Telephone number:<br>Numero di telefono: | <b>0445/741310</b>       |
| E-mail address:<br>Indirizzo e-mail:          | <b>INFO@THERMOROSSI.IT</b> |  |                          |

declare that the DoC is issued under our sole responsibility and belongs to the following product:  
 dichiara che la dichiarazione viene rilasciata sotto la propria responsabilità e si riferisce al seguente prodotto:

|  |                                     |                                     |                           |
|--|-------------------------------------|-------------------------------------|---------------------------|
| <b>Apparatus model / Product:</b><br><b>Product description:</b> | Wood log insert<br>Inserito a legna | <b>Trademark:</b><br><b>Marchio</b> | <b>THERMOROSSI S.P.A.</b> |
|--|-------------------------------------|-------------------------------------|---------------------------|

**Models:**  
**Modelli:**

**SKYLINE 490 8 – SKYLINE EVO6 490 9**  
**PANORAMA 490 8 – PANORAMA EVO6 490 9**  
**SKYLINE 540 6 – SKYLINE 540 8 – SKYLINE 540 10 – SKYLINE EVO6 540 11**  
**SKYLINE 800 6 – SKYLINE 800 8 – SKYLINE 800 10 – SKYLINE EVO6 800 11**  
**SKYLINE 1000 6 – SKYLINE 1000 8 – SKYLINE 1000 10 – SKYLINE EVO6 1000 11**  
**PANORAMA 6 – PANORAMA 8 – PANORAMA 10 – PANORAMA EVO6 11**  
**MOONLIGHT 6 – MOONLIGHT 8 – MOONLIGHT 10 – MOONLIGHT EVO6 11**  
**FULLMOON 6 – FULLMOON 8 – FULLMOON 10 – FULLMOON EVO6 11**  
**TRILOGIE 6 – TRILOGIE 8 – TRILOGIE 10 – TRILOGIE EVO6 11**


Sono state applicate le seguenti norme armonizzate e/o direttive:  
 The following harmonised standards and/or directives have been applied:


**Commission Regulation (EU) 2015/1185**



Arsiero, 12/04/2026

Firma/Sign.


*Installation, use and maintenance guide*  
**SKYLINE – PANORAMA – FULLMOON – MOONLIGHT – TRILOGIE**


| <b>THERMOROSSI</b><br><small>Fire Savers</small>  | <b>DECLARATION OF PERFORMANCE IN ACCORDANCE WITH<br/>REGULATION (EU) 305/2011</b> | n°A213  |
|---|---|---|
| 1 - Unique identification code of the product type:   |   | PANORAMA 490 8  |
| 2 - Model, batch, series (Art. 11, paragraph 4):  |   | PANORAMA 490 8  |
| 3 - Intended uses of the construction product, in accordance with the applicable harmonised technical specification:      |   | Residential space heating appliance without water fired by wood logs  |
| 4 - Name and address of the manufacturer (Art. 11, paragraph 5):  |   | THERMOROSSI S.P.A. Via Grumolo, n° 4 36011 Arsiero (VI) Tel.0445/741310   |
| 5 - Name and address of the authorised representative (Article 12, paragraph 2):  |   | -   |
| 6 - System of assessment and verification of constancy of performance of the construction product as set out in Annexe V: |   | System 3 and 4  |
| 7 - Notified laboratory:  |   | Kiwa Italia S.p.a. N° 0476  |
| Harmonised technical specification:   |   | EN 16510-2-1  |
| Test report number based on System 3:   |   | 0476-AoP-CPR-4014283  |
| 8 - Declared performance:   |   |   |
| <b>Essential characteristics</b>  |   | <b>Performance</b>  |
| Fire resistance:  |   | A1  |
| Minimum safety distances from combustible materials in mm:  |   |   |
| Rear / Side / Front / Ceiling / Floor:  |   | 200 / 200 / 2000 / 750 / 100  |
| Fuel spillage risk:   |   | Compliant   |
| Surface temperature:  |   | Compliant   |
| Electrical safety:  |   | Compliant   |
| Accessibility and cleaning:   |   | Compliant   |
| Emissions of combustion products:   |   |   |
| at rated power / at reduced power (mg/m <sup>3</sup> at 13% O <sub>2</sub> ):   |   | 382 / -   |
| Maximum operating pressure: kPa(Bar)  |   | N.A.  |
| Smoke temperature at rated power (°C):  |   | 221   |
| Mechanical strength (to support the chimney):   |   | Conforme  |
| Rated thermal power (kW)  |   | 7,9   |
| Heat output in the environment (kW):  |   | 7,9   |
| Heat output transferred to water (kW):  |   | -   |
| Efficiency at rated power (%):  |   | 85  |
| Efficiency at reduced power (%):  |   | -   |
| 9 - The performance of the appliance referred to in points 1 and 2 complies with the performance declared in point 8.     |   |   |
| This declaration of performance is issued under the sole responsibility of the manufacturer as of point 4.                |   |   |
| Arsiero, 16/04/2026   |   | Firma/Signature:<br><br>THERMOROSSI S.P.A.<br>Via Grumolo, 4 - 36011 Arsiero (VI) - Italy |

| <b>THERMOROSSI</b><br><small>Fire Savers</small>  | <b>DECLARATION OF PERFORMANCE IN ACCORDANCE WITH<br/>REGULATION (EU) 305/2011</b> | n°A214   |
|---|---|--|
| 1 - Unique identification code of the product type:   |   | PANORAMA EVO6 490 9  |
| 2 - Model, batch, series (Art. 11, paragraph 4):  |   | PANORAMA EVO6 490 9  |
| 3 - Intended uses of the construction product, in accordance with the applicable harmonised technical specification:      |   | Residential space heating appliance without water fired by wood logs   |
| 4 - Name and address of the manufacturer (Art. 11, paragraph 5):  |   | THERMOROSSI S.P.A. Via Grumolo, n° 4 36011 Arsiero (VI) Tel.0445/741310  |
| 5 - Name and address of the authorised representative (Article 12, paragraph 2):  |   | -  |
| 6 - System of assessment and verification of constancy of performance of the construction product as set out in Annexe V: |   | System 3 and 4   |
| 7 - Notified laboratory:  |   | Kiwa Italia S.p.a. N° 0476   |
| Harmonised technical specification:   |   | EN 16510-2-1   |
| Test report number based on System 3:   |   | 0476-AoP-CPR-4014283   |
| 8 - Declared performance:   |   |  |
| <b>Essential characteristics</b>  |   | <b>Performance</b>   |
| Fire resistance:  |   | A1   |
| Minimum safety distances from combustible materials in mm:  |   |  |
| Rear / Side / Front / Ceiling / Floor:  |   | 200 / 200 / 2000 / 750 / 100   |
| Fuel spillage risk:   |   | Compliant  |
| Surface temperature:  |   | Compliant  |
| Electrical safety:  |   | Compliant  |
| Accessibility and cleaning:   |   | Compliant  |
| Emissions of combustion products:   |   |  |
| at rated power / at reduced power (mg/m <sup>3</sup> at 13% O <sub>2</sub> ):   |   | 382 / -  |
| Maximum operating pressure: kPa(Bar)  |   | N.A.   |
| Smoke temperature at rated power (°C):  |   | 221  |
| Mechanical strength (to support the chimney):   |   | Conforme   |
| Rated thermal power (kW)  |   | 7,9  |
| Heat output in the environment (kW):  |   | 7,9  |
| Heat output transferred to water (kW):  |   | -  |
| Efficiency at rated power (%):  |   | 85   |
| Efficiency at reduced power (%):  |   | -  |
| 9 - The performance of the appliance referred to in points 1 and 2 complies with the performance declared in point 8.     |   |  |
| This declaration of performance is issued under the sole responsibility of the manufacturer as of point 4.                |   |  |
| Arsiero, 16/04/2026   |   | Firma/Signature:<br><br>THERMOROSSI S.P.A.<br>Via Grumolo, 4 - 36011 Arsiero (VI) - Italy |

| <b>THERMOROSSI</b> <small>Fire Lovers</small> <b>DECLARATION OF PERFORMANCE IN ACCORDANCE WITH REGULATION (EU) 305/2011</b> |   | n°A130             |
|---|---|--------------------|
| 1 - Unique identification code of the product type:   | SKYLINE 490 8   |                    |
| 2 - Model, batch, series (Art. 11, paragraph 4):  | SKYLINE 490 8   |                    |
| 3 - Intended uses of the construction product, in accordance with the applicable harmonised technical specification:        | Residential space heating appliance without water fired by wood logs                                      |                    |
| 4 - Name and address of the manufacturer (Art. 11, paragraph 5):  | THERMOROSSI S.P.A. Via Grumolo, n° 4 36011 Arsiero (VI) Italy Tel.0445/741310                             |                    |
| 5 - Name and address of the authorised representative (Article 12, paragraph 2):  | -   |                    |
| 6 - System of assessment and verification of constancy of performance of the construction product as set out in Annexe V:   | System 3 and 4  |                    |
| 7 - Notified laboratory:  | Kiwa Italia S.p.a. N° 0476  |                    |
| Harmonised technical specification:   | EN 16510-2-1  |                    |
| Test report number based on System 3:   | 0476-AoP-CPR-4014283  |                    |
| 8 - Declared performance:   |   |                    |
| <b>Essential characteristics</b>  |   | <b>Performance</b> |
| Fire resistance:  | A1  |                    |
| Minimum safety distances from combustible materials in mm:  |   |                    |
| Rear / Side / Front / Ceiling / Floor:  | 200 / 200 / 2000 / 750 / 100  |                    |
| Fuel spillage risk:   | Compliant   |                    |
| Surface temperature:  | Compliant   |                    |
| Electrical safety:  | Compliant   |                    |
| Accessibility and cleaning:   | Compliant   |                    |
| Emissions of combustion products:   |   |                    |
| at rated power / at reduced power (mg/m <sup>3</sup> at 13% O <sub>2</sub> ):   | 382 / -   |                    |
| Maximum operating pressure: kPa(Bar)  | N.A.  |                    |
| Smoke temperature at rated power (°C):  | 221   |                    |
| Mechanical strength (to support the chimney):   | Compliant   |                    |
| Rated thermal power (kW)  | 7.9   |                    |
| Heat output in the environment (kW):  | 7.9   |                    |
| Heat output transferred to water (kW):  | -   |                    |
| Efficiency at rated power (%):  | 85  |                    |
| Efficiency at reduced power (%):  | -   |                    |
| 9 - The performance of the appliance referred to in points 1 and 2 complies with the performance declared in point 8.       |   |                    |
| This declaration of performance is issued under the sole responsibility of the manufacturer as of point 4.                  |   |                    |
| Arsiero, 12/01/2026   | Firma/Signature:<br> |                    |
| <b>THERMOROSSI</b> <small>Fire Lovers</small> <b>DECLARATION OF PERFORMANCE IN ACCORDANCE WITH REGULATION (EU) 305/2011</b> |   | n°A181             |
| 1 - Unique identification code of the product type:   | SKYLINE 490 EVO6 9  |                    |
| 2 - Model, batch, series (Art. 11, paragraph 4):  | SKYLINE 490 EVO6 9  |                    |
| 3 - Intended uses of the construction product, in accordance with the applicable harmonised technical specification:        | Residential space heating appliance without water fired by wood logs                                      |                    |
| 4 - Name and address of the manufacturer (Art. 11, paragraph 5):  | THERMOROSSI S.P.A. Via Grumolo, n° 4 36011 Arsiero (VI) Italy Tel.0445/741310                             |                    |
| 5 - Name and address of the authorised representative (Article 12, paragraph 2):  | -   |                    |
| 6 - System of assessment and verification of constancy of performance of the construction product as set out in Annexe V:   | System 3 and 4  |                    |
| 7 - Notified laboratory:  | Kiwa Italia S.p.a. N° 0476  |                    |
| Harmonised technical specification:   | EN 16510-2-1  |                    |
| Test report number based on System 3:   | 0476-AoP-CPR-4014283  |                    |
| 8 - Declared performance:   |   |                    |
| <b>Essential characteristics</b>  |   | <b>Performance</b> |
| Fire resistance:  | A1  |                    |
| Minimum safety distances from combustible materials in mm:  |   |                    |
| Rear / Side / Front / Ceiling / Floor:  | 200 / 200 / 2000 / 750 / 100  |                    |
| Fuel spillage risk:   | Compliant   |                    |
| Surface temperature:  | Compliant   |                    |
| Electrical safety:  | Compliant   |                    |
| Accessibility and cleaning:   | Compliant   |                    |
| Emissions of combustion products:   |   |                    |
| at rated power / at reduced power (mg/m <sup>3</sup> at 13% O <sub>2</sub> ):   | 511 / -   |                    |
| Maximum operating pressure: kPa(Bar)  | N.A.  |                    |
| Smoke temperature at rated power (°C):  | 210   |                    |
| Mechanical strength (to support the chimney):   | Compliant   |                    |
| Rated thermal power (kW)  | 9.3   |                    |
| Heat output in the environment (kW):  | 9.3   |                    |
| Heat output transferred to water (kW):  | -   |                    |
| Efficiency at rated power (%):  | 86  |                    |
| Efficiency at reduced power (%):  | -   |                    |
| 9 - The performance of the appliance referred to in points 1 and 2 complies with the performance declared in point 8.       |   |                    |
| This declaration of performance is issued under the sole responsibility of the manufacturer as of point 4.                  |   |                    |
| Arsiero, 12/01/2026   | Firma/Signature:<br> |                    |


*Installation, use and maintenance guide*  
**SKYLINE – PANORAMA – FULLMOON – MOONLIGHT – TRILOGIE**


| <b>THERMOROSSI</b><br><small>Fire Covers</small>  | <b>DECLARATION OF PERFORMANCE IN ACCORDANCE WITH<br/>REGULATION (EU) 305/2011</b> | n°A132   |
|---|---|--|
| 1 - Unique identification code of the product type:   |   | SKYLINE 540 6  |
| 2 - Model, batch, series (Art. 11, paragraph 4):  |   | SKYLINE 540 6  |
| 3 - Intended uses of the construction product, in accordance with the applicable harmonised technical specification:      |   | Residential space heating appliance without water fired by wood logs                                     |
| 4 - Name and address of the manufacturer (Art. 11, paragraph 5):  |   | THERMOROSSI S.P.A. Via Grumolo, n° 4 36011 Arsiero (VI) Italy Tel.0445/741310                            |
| 5 - Name and address of the authorised representative (Article 12, paragraph 2):  |   | -  |
| 6 - System of assessment and verification of constancy of performance of the construction product as set out in Annexe V: |   | System 3 and 4   |
| 7 - Notified laboratory:  |   | Kiwa Italia S.p.a. N° 0476   |
| Harmonised technical specification:   |   | EN 16510-2-1   |
| Test report number based on System 3:   |   | 0476-AoP-CPR-3014283   |
| 8 - Declared performance:   |   |  |
| <b>Essential characteristics</b>  |   | <b>Performance</b>   |
| Fire resistance:  |   | A1   |
| Minimum safety distances from combustible materials in mm:  |   |  |
| Rear / Side / Front / Ceiling / Floor:  |   | 200 / 200 / 2000 / 750 / 100   |
| Fuel spillage risk:   |   | Compliant  |
| Surface temperature:  |   | Compliant  |
| Electrical safety:  |   | Compliant  |
| Accessibility and cleaning:   |   | Compliant  |
| Emissions of combustion products:   |   |  |
| at rated power / at reduced power (mg/m <sup>3</sup> at 13% O <sub>2</sub> ):   |   | 348 / -  |
| Maximum operating pressure: kPa(Bar)  |   | N.A.   |
| Smoke temperature at rated power (°C):  |   | 201  |
| Mechanical strength (to support the chimney):   |   | Compliant  |
| Rated thermal power (kW)  |   | 5.7  |
| Heat output in the environment (kW):  |   | 5.7  |
| Heat output transferred to water (kW):  |   | -  |
| Efficiency at rated power (%):  |   | 84   |
| Efficiency at reduced power (%):  |   | -  |
| 9 - The performance of the appliance referred to in points 1 and 2 complies with the performance declared in point 8.     |   |  |
| This declaration of performance is issued under the sole responsibility of the manufacturer as of point 4.                |   |  |
| Arsiero, 12/01/2026   |   | Firma/Signature:<br> |

| <b>THERMOROSSI</b><br><small>Fire Covers</small>  | <b>DECLARATION OF PERFORMANCE IN ACCORDANCE WITH<br/>REGULATION (EU) 305/2011</b> | n°A133  |
|---|---|---|
| 1 - Unique identification code of the product type:   |   | SKYLINE 540 8   |
| 2 - Model, batch, series (Art. 11, paragraph 4):  |   | SKYLINE 540 8   |
| 3 - Intended uses of the construction product, in accordance with the applicable harmonised technical specification:      |   | Residential space heating appliance without water fired by wood logs                                      |
| 4 - Name and address of the manufacturer (Art. 11, paragraph 5):  |   | THERMOROSSI S.P.A. Via Grumolo, n° 4 36011 Arsiero (VI) Italy Tel.0445/741310                             |
| 5 - Name and address of the authorised representative (Article 12, paragraph 2):  |   | -   |
| 6 - System of assessment and verification of constancy of performance of the construction product as set out in Annexe V: |   | System 3 and 4  |
| 7 - Notified laboratory:  |   | Kiwa Italia S.p.a. N° 0476  |
| Harmonised technical specification:   |   | EN 16510-2-1  |
| Test report number based on System 3:   |   | 0476-AoP-CPR-3014283  |
| 8 - Declared performance:   |   |   |
| <b>Essential characteristics</b>  |   | <b>Performance</b>  |
| Fire resistance:  |   | A1  |
| Minimum safety distances from combustible materials in mm:  |   |   |
| Rear / Side / Front / Ceiling / Floor:  |   | 200 / 200 / 200 / 750 / 100   |
| Fuel spillage risk:   |   | Compliant   |
| Surface temperature:  |   | Compliant   |
| Electrical safety:  |   | Compliant   |
| Accessibility and cleaning:   |   | Compliant   |
| Emissions of combustion products:   |   |   |
| at rated power / at reduced power (mg/m <sup>3</sup> at 13% O <sub>2</sub> ):   |   | 228 / -   |
| Maximum operating pressure: kPa(Bar)  |   | N.A.  |
| Smoke temperature at rated power (°C):  |   | 203   |
| Mechanical strength (to support the chimney):   |   | Compliant   |
| Rated thermal power (kW)  |   | 7.9   |
| Heat output in the environment (kW):  |   | 7.9   |
| Heat output transferred to water (kW):  |   | -   |
| Efficiency at rated power (%):  |   | 87  |
| Efficiency at reduced power (%):  |   | -   |
| 9 - The performance of the appliance referred to in points 1 and 2 complies with the performance declared in point 8.     |   |   |
| This declaration of performance is issued under the sole responsibility of the manufacturer as of point 4.                |   |   |
| Arsiero, 12/01/2026   |   | Firma/Signature:<br> |


*Installation, use and maintenance guide*  
**SKYLINE – PANORAMA – FULLMOON – MOONLIGHT – TRILOGIE**


**ENG**


| <b>THERMOROSSI</b><br><small>Fire Lovers</small>   | <b>DECLARATION OF PERFORMANCE IN ACCORDANCE WITH<br/>REGULATION (EU) 305/2011</b> | n°A134   |
|--|---|--|
| 1 - Unique identification code of the product type:  |   | SKYLINE 540 10   |
| 2 - Model, batch, series (Art. 11, paragraph 4):   |   | SKYLINE 540 10   |
| 3 - Intended uses of the construction product, in accordance with the applicable harmonised technical specification:     |   | Residential space heating appliance without water fired by wood logs                                     |
| 4 - Name and address of the manufacturer (Art. 11, paragraph 5):   |   | THERMOROSSI S.P.A. Via Grumolo, n° 4 36011 Arsiero (VI) Italy Tel.0445/741310                            |
| 5 - Name and address of the authorised representative (Article 12, paragraph 2):   |   | -  |
| 6 - System of assessment and verification of constancy of performance of the construction product as set out in Annex V: |   | System 3 and 4   |
| 7 - Notified laboratory:   |   | Kiwa Italia S.p.a. N° 0476   |
| Harmonised technical specification:  |   | EN 16510-2-1   |
| Test report number based on System 3:  |   | 0476-AoP-CPR-3014283   |
| 8 - Declared performance:  |   |  |
| <b>Essential characteristics</b>   |   | <b>Performance</b>   |
| Fire resistance:   |   | A1   |
| Minimum safety distances from combustible materials in mm:   |   |  |
| Rear / Side / Front / Ceiling / Floor:   |   | 200 / 200 / 2000 / 750 / 100   |
| Fuel spillage risk:  |   | Compliant  |
| Surface temperature:   |   | Compliant  |
| Electrical safety:   |   | Compliant  |
| Accessibility and cleaning:  |   | Compliant  |
| Emissions of combustion products:  |   |  |
| at rated power / at reduced power (mg/m <sup>3</sup> at 13% O <sub>2</sub> ):  |   | 150 / -  |
| Maximum operating pressure: kPa(Bar)   |   | N.A.   |
| Smoke temperature at rated power (°C):   |   | 240  |
| Mechanical strength (to support the chimney):  |   | Compliant  |
| Rated thermal power (kW)   |   | 9.9  |
| Heat output in the environment (kW):   |   | 9.9  |
| Heat output transferred to water (kW):   |   | -  |
| Efficiency at rated power (%):   |   | 86   |
| Efficiency at reduced power (%):   |   | -  |
| 9 - The performance of the appliance referred to in points 1 and 2 complies with the performance declared in point 8.    |   |  |
| This declaration of performance is issued under the sole responsibility of the manufacturer as of point 4.               |   |  |
| Arsiero, 12/01/2026  |   | Firma/Signature:<br> |


| <b>THERMOROSSI</b><br><small>Fire Lovers</small>   | <b>DECLARATION OF PERFORMANCE IN ACCORDANCE WITH<br/>REGULATION (EU) 305/2011</b> | n°A177  |
|--|---|---|
| 1 - Unique identification code of the product type:  |   | SKYLINE EVO6 540 11   |
| 2 - Model, batch, series (Art. 11, paragraph 4):   |   | SKYLINE EVO6 540 11   |
| 3 - Intended uses of the construction product, in accordance with the applicable harmonised technical specification:     |   | Residential space heating appliance without water fired by wood logs                                      |
| 4 - Name and address of the manufacturer (Art. 11, paragraph 5):   |   | THERMOROSSI S.P.A. Via Grumolo, n° 4 36011 Arsiero (VI) Italy Tel.0445/741310                             |
| 5 - Name and address of the authorised representative (Article 12, paragraph 2):   |   | -   |
| 6 - System of assessment and verification of constancy of performance of the construction product as set out in Annex V: |   | System 3 and 4  |
| 7 - Notified laboratory:   |   | Kiwa Italia S.p.a. N° 0476  |
| Harmonised technical specification:  |   | EN 16510-2-1  |
| Test report number based on System 3:  |   | 0476-AoP-CPR-3014283  |
| 8 - Declared performance:  |   |   |
| <b>Essential characteristics</b>   |   | <b>Performance</b>  |
| Fire resistance:   |   | A1  |
| Minimum safety distances from combustible materials in mm:   |   |   |
| Rear / Side / Front / Ceiling / Floor:   |   | 200 / 200 / 2000 / 750 / 100  |
| Fuel spillage risk:  |   | Compliant   |
| Surface temperature:   |   | Compliant   |
| Electrical safety:   |   | Compliant   |
| Accessibility and cleaning:  |   | Compliant   |
| Emissions of combustion products:  |   |   |
| at rated power / at reduced power (mg/m <sup>3</sup> at 13% O <sub>2</sub> ):  |   | 160 / -   |
| Maximum operating pressure: kPa(Bar)   |   | N.A.  |
| Smoke temperature at rated power (°C):   |   | 253   |
| Mechanical strength (to support the chimney):  |   | Compliant   |
| Rated thermal power (kW)   |   | 10.6  |
| Heat output in the environment (kW):   |   | 10.6  |
| Heat output transferred to water (kW):   |   | -   |
| Efficiency at rated power (%):   |   | 86  |
| Efficiency at reduced power (%):   |   | -   |
| 9 - The performance of the appliance referred to in points 1 and 2 complies with the performance declared in point 8.    |   |   |
| This declaration of performance is issued under the sole responsibility of the manufacturer as of point 4.               |   |   |
| Arsiero, 12/01/2026  |   | Firma/Signature:<br> |

*Installation, use and maintenance guide*  
**SKYLINE – PANORAMA – FULLMOON – MOONLIGHT – TRILOGIE**


| <b>THERMOROSSI</b><br><small>Fire Covers</small>  | <b>DECLARATION OF PERFORMANCE IN ACCORDANCE WITH<br/>REGULATION (EU) 305/2011</b> | n°A198   |
|---|---|--|
| 1 - Unique identification code of the product type:   |   | SKYLINE 800 6  |
| 2 - Model, batch, series (Art. 11, paragraph 4):  |   | SKYLINE 800 6  |
| 3 - Intended uses of the construction product, in accordance with the applicable harmonised technical specification:      |   | Residential space heating appliance without water fired by wood logs                                     |
| 4 - Name and address of the manufacturer (Art. 11, paragraph 5):  |   | THERMOROSSI S.P.A. Via Grumolo, n° 4 36011 Arsiero (VI) Italy Tel.0445/741310                            |
| 5 - Name and address of the authorised representative (Article 12, paragraph 2):  |   | -  |
| 6 - System of assessment and verification of constancy of performance of the construction product as set out in Annexe V: |   | System 3 and 4   |
| 7 - Notified laboratory:  |   | Kiwa Italia S.p.a. N° 0476   |
| Harmonised technical specification:   |   | EN 16510-2-1   |
| Test report number based on System 3:   |   | 0476-AoP-CPR-3014283   |
| 8 - Declared performance:   |   |  |
| <b>Essential characteristics</b>  |   | <b>Performance</b>   |
| Fire resistance:  |   | A1   |
| Minimum safety distances from combustible materials in mm:  |   |  |
| Rear / Side / Front / Ceiling / Floor:  |   | 200 / 200 / 2000 / 750 / 100   |
| Fuel spillage risk:   |   | Compliant  |
| Surface temperature:  |   | Compliant  |
| Electrical safety:  |   | Compliant  |
| Accessibility and cleaning:   |   | Compliant  |
| Emissions of combustion products:   |   |  |
| at rated power / at reduced power (mg/m <sup>3</sup> at 13% O <sub>2</sub> ):   |   | 348 / -  |
| Maximum operating pressure: kPa(Bar)  |   | N.A.   |
| Smoke temperature at rated power (°C):  |   | 201  |
| Mechanical strength (to support the chimney):   |   | Compliant  |
| Rated thermal power (kW)  |   | 5.7  |
| Heat output in the environment (kW):  |   | 5.7  |
| Heat output transferred to water (kW):  |   | -  |
| Efficiency at rated power (%):  |   | 84   |
| Efficiency at reduced power (%):  |   | -  |
| 9 - The performance of the appliance referred to in points 1 and 2 complies with the performance declared in point 8.     |   |  |
| This declaration of performance is issued under the sole responsibility of the manufacturer as of point 4.                |   |  |
| Arsiero, 12/01/2026   |   | Firma/Signature:<br> |


| <b>THERMOROSSI</b><br><small>Fire Covers</small>  | <b>DECLARATION OF PERFORMANCE IN ACCORDANCE WITH<br/>REGULATION (EU) 305/2011</b> | n°A203  |
|---|---|---|
| 1 - Unique identification code of the product type:   |   | SKYLINE 800 8   |
| 2 - Model, batch, series (Art. 11, paragraph 4):  |   | SKYLINE 800 8   |
| 3 - Intended uses of the construction product, in accordance with the applicable harmonised technical specification:      |   | Residential space heating appliance without water fired by wood logs                                      |
| 4 - Name and address of the manufacturer (Art. 11, paragraph 5):  |   | THERMOROSSI S.P.A. Via Grumolo, n° 4 36011 Arsiero (VI) Italy Tel.0445/741310                             |
| 5 - Name and address of the authorised representative (Article 12, paragraph 2):  |   | -   |
| 6 - System of assessment and verification of constancy of performance of the construction product as set out in Annexe V: |   | System 3 and 4  |
| 7 - Notified laboratory:  |   | Kiwa Italia S.p.a. N° 0476  |
| Harmonised technical specification:   |   | EN 16510-2-1  |
| Test report number based on System 3:   |   | 0476-AoP-CPR-3014283  |
| 8 - Declared performance:   |   |   |
| <b>Essential characteristics</b>  |   | <b>Performance</b>  |
| Fire resistance:  |   | A1  |
| Minimum safety distances from combustible materials in mm:  |   |   |
| Rear / Side / Front / Ceiling / Floor:  |   | 200 / 200 / 2000 / 750 / 100  |
| Fuel spillage risk:   |   | Compliant   |
| Surface temperature:  |   | Compliant   |
| Electrical safety:  |   | Compliant   |
| Accessibility and cleaning:   |   | Compliant   |
| Emissions of combustion products:   |   |   |
| at rated power / at reduced power (mg/m <sup>3</sup> at 13% O <sub>2</sub> ):   |   | 228 / -   |
| Maximum operating pressure: kPa(Bar)  |   | N.A.  |
| Smoke temperature at rated power (°C):  |   | 203   |
| Mechanical strength (to support the chimney):   |   | Compliant   |
| Rated thermal power (kW)  |   | 7.9   |
| Heat output in the environment (kW):  |   | 7.9   |
| Heat output transferred to water (kW):  |   | -   |
| Efficiency at rated power (%):  |   | 87  |
| Efficiency at reduced power (%):  |   | -   |
| 9 - The performance of the appliance referred to in points 1 and 2 complies with the performance declared in point 8.     |   |   |
| This declaration of performance is issued under the sole responsibility of the manufacturer as of point 4.                |   |   |
| Arsiero, 12/01/2026   |   | Firma/Signature:<br> |

| <b>THERMOROSSI</b><br><small>Fire Lovers</small>   | <b>DECLARATION OF PERFORMANCE IN ACCORDANCE WITH<br/>REGULATION (EU) 305/2011</b> | n°A200   |
|--|---|--|
| 1 - Unique identification code of the product type:  |   | SKYLINE 800 10   |
| 2 - Model, batch, series (Art. 11, paragraph 4):   |   | SKYLINE 800 10   |
| 3 - Intended uses of the construction product, in accordance with the applicable harmonised technical specification:     |   | Residential space heating appliance without water fired by wood logs                                     |
| 4 - Name and address of the manufacturer (Art. 11, paragraph 5):   |   | THERMOROSSI S.P.A. Via Grumolo, n° 4 36011 Arsiero (VI) Italy Tel.0445/741310                            |
| 5 - Name and address of the authorised representative (Article 12, paragraph 2):   |   | -  |
| 6 - System of assessment and verification of constancy of performance of the construction product as set out in Annex V: |   | System 3 and 4   |
| 7 - Notified laboratory:   |   | Kiwa Italia S.p.a. N° 0476   |
| Harmonised technical specification:  |   | EN 16510-2-1   |
| Test report number based on System 3:  |   | 0476-AoP-CPR-3014283   |
| 8 - Declared performance:  |   |  |
| <b>Essential characteristics</b>   |   | <b>Performance</b>   |
| Fire resistance:   |   | A1   |
| Minimum safety distances from combustible materials in mm:   |   |  |
| Rear / Side / Front / Ceiling / Floor:   |   | 200 / 200 / 2000 / 750 / 100   |
| Fuel spillage risk:  |   | Compliant  |
| Surface temperature:   |   | Compliant  |
| Electrical safety:   |   | Compliant  |
| Accessibility and cleaning:  |   | Compliant  |
| Emissions of combustion products:  |   |  |
| at rated power / at reduced power (mg/m <sup>3</sup> at 13% O <sub>2</sub> ):  |   | 150 / -  |
| Maximum operating pressure: kPa(Bar)   |   | N.A.   |
| Smoke temperature at rated power (°C):   |   | 240  |
| Mechanical strength (to support the chimney):  |   | Compliant  |
| Rated thermal power (kW)   |   | 9.9  |
| Heat output in the environment (kW):   |   | 9.9  |
| Heat output transferred to water (kW):   |   | -  |
| Efficiency at rated power (%):   |   | 86   |
| Efficiency at reduced power (%):   |   | -  |
| 9 - The performance of the appliance referred to in points 1 and 2 complies with the performance declared in point 8.    |   |  |
| This declaration of performance is issued under the sole responsibility of the manufacturer as of point 4.               |   |  |
| Arsiero, 12/01/2026  |   | Firma/Signature:<br> |

| <b>THERMOROSSI</b><br><small>Fire Lovers</small>   | <b>DECLARATION OF PERFORMANCE IN ACCORDANCE WITH<br/>REGULATION (EU) 305/2011</b> | n°A201  |
|--|---|---|
| 1 - Unique identification code of the product type:  |   | SKYLINE EVO6 800 11   |
| 2 - Model, batch, series (Art. 11, paragraph 4):   |   | SKYLINE EVO6 800 11   |
| 3 - Intended uses of the construction product, in accordance with the applicable harmonised technical specification:     |   | Residential space heating appliance without water fired by wood logs                                      |
| 4 - Name and address of the manufacturer (Art. 11, paragraph 5):   |   | THERMOROSSI S.P.A. Via Grumolo, n° 4 36011 Arsiero (VI) Italy Tel.0445/741310                             |
| 5 - Name and address of the authorised representative (Article 12, paragraph 2):   |   | -   |
| 6 - System of assessment and verification of constancy of performance of the construction product as set out in Annex V: |   | System 3 and 4  |
| 7 - Notified laboratory:   |   | Kiwa Italia S.p.a. N° 0476  |
| Harmonised technical specification:  |   | EN 16510-2-1  |
| Test report number based on System 3:  |   | 0476-AoP-CPR-3014283  |
| 8 - Declared performance:  |   |   |
| <b>Essential characteristics</b>   |   | <b>Performance</b>  |
| Fire resistance:   |   | A1  |
| Minimum safety distances from combustible materials in mm:   |   |   |
| Rear / Side / Front / Ceiling / Floor:   |   | 200 / 200 / 2000 / 750 / 100  |
| Fuel spillage risk:  |   | Compliant   |
| Surface temperature:   |   | Compliant   |
| Electrical safety:   |   | Compliant   |
| Accessibility and cleaning:  |   | Compliant   |
| Emissions of combustion products:  |   |   |
| at rated power / at reduced power (mg/m <sup>3</sup> at 13% O <sub>2</sub> ):  |   | 160 / -   |
| Maximum operating pressure: kPa(Bar)   |   | N.A.  |
| Smoke temperature at rated power (°C):   |   | 253   |
| Mechanical strength (to support the chimney):  |   | Compliant   |
| Rated thermal power (kW)   |   | 10.6  |
| Heat output in the environment (kW):   |   | 10.6  |
| Heat output transferred to water (kW):   |   | -   |
| Efficiency at rated power (%):   |   | 86  |
| Efficiency at reduced power (%):   |   | -   |
| 9 - The performance of the appliance referred to in points 1 and 2 complies with the performance declared in point 8.    |   |   |
| This declaration of performance is issued under the sole responsibility of the manufacturer as of point 4.               |   |   |
| Arsiero, 12/01/2026  |   | Firma/Signature:<br> |


*Installation, use and maintenance guide*  
**SKYLINE – PANORAMA – FULLMOON – MOONLIGHT – TRILOGIE**


| <b>THERMOROSSI</b><br><small>Fire Savers</small>  | <b>DECLARATION OF PERFORMANCE IN ACCORDANCE WITH<br/>REGULATION (EU) 305/2011</b> | n°A202  |
|---|---|---|
| 1 - Unique identification code of the product type:   |   | SKYLINE 1000 6  |
| 2 - Model, batch, series (Art. 11, paragraph 4):  |   | SKYLINE 1000 6  |
| 3 - Intended uses of the construction product, in accordance with the applicable harmonised technical specification:      |   | Residential space heating appliance without water fired by wood logs  |
| 4 - Name and address of the manufacturer (Art. 11, paragraph 5):  |   | THERMOROSSI S.P.A. Via Grumolo, n° 4 36011 Arsiero (VI) Italy Tel.0445/741310   |
| 5 - Name and address of the authorised representative (Article 12, paragraph 2):  |   | -   |
| 6 - System of assessment and verification of constancy of performance of the construction product as set out in Annexe V: |   | System 3 and 4  |
| 7 - Notified laboratory:  |   | Kiwa Italia S.p.a. N° 0476  |
| Harmonised technical specification:   |   | EN 16510-2-1  |
| Test report number based on System 3:   |   | 0476-AoP-CPR-3014283  |
| 8 - Declared performance:   |   |   |
| <b>Essential characteristics</b>  |   | <b>Performance</b>  |
| Fire resistance:  |   | A1  |
| Minimum safety distances from combustible materials in mm:  |   |   |
| Rear / Side / Front / Ceiling / Floor:  |   | 200 / 200 / 2000 / 750 / 100  |
| Fuel spillage risk:   |   | Compliant   |
| Surface temperature:  |   | Compliant   |
| Electrical safety:  |   | Compliant   |
| Accessibility and cleaning:   |   | Compliant   |
| Emissions of combustion products:   |   |   |
| at rated power / at reduced power (mg/m <sup>3</sup> at 13% O <sub>2</sub> ):   |   | 348 / -   |
| Maximum operating pressure: kPa(Bar):   |   | N.A.  |
| Smoke temperature at rated power (°C):  |   | 201   |
| Mechanical strength (to support the chimney):   |   | Compliant   |
| Rated thermal power (kW)  |   | 5.7   |
| Heat output in the environment (kW):  |   | 5.7   |
| Heat output transferred to water (kW):  |   | -   |
| Efficiency at rated power (%):  |   | 84  |
| Efficiency at reduced power (%):  |   | -   |
| 9 - The performance of the appliance referred to in points 1 and 2 complies with the performance declared in point 8.     |   |   |
| This declaration of performance is issued under the sole responsibility of the manufacturer as of point 4.                |   |   |
| Arsiero, 12/01/2026   |   | Firma/Signature:<br><br><small>THERMOROSSI S.p.A.<br/>Uff. Amministrativa</small> |

| <b>THERMOROSSI</b><br><small>Fire Savers</small>  | <b>DECLARATION OF PERFORMANCE IN ACCORDANCE WITH<br/>REGULATION (EU) 305/2011</b> | n°A203   |
|---|---|--|
| 1 - Unique identification code of the product type:   |   | SKYLINE 1000 8   |
| 2 - Model, batch, series (Art. 11, paragraph 4):  |   | SKYLINE 1000 8   |
| 3 - Intended uses of the construction product, in accordance with the applicable harmonised technical specification:      |   | Residential space heating appliance without water fired by wood logs   |
| 4 - Name and address of the manufacturer (Art. 11, paragraph 5):  |   | THERMOROSSI S.P.A. Via Grumolo, n° 4 36011 Arsiero (VI) Italy Tel.0445/741310  |
| 5 - Name and address of the authorised representative (Article 12, paragraph 2):  |   | -  |
| 6 - System of assessment and verification of constancy of performance of the construction product as set out in Annexe V: |   | System 3 and 4   |
| 7 - Notified laboratory:  |   | Kiwa Italia S.p.a. N° 0476   |
| Harmonised technical specification:   |   | EN 16510-2-1   |
| Test report number based on System 3:   |   | 0476-AoP-CPR-3014283   |
| 8 - Declared performance:   |   |  |
| <b>Essential characteristics</b>  |   | <b>Performance</b>   |
| Fire resistance:  |   | A1   |
| Minimum safety distances from combustible materials in mm:  |   |  |
| Rear / Side / Front / Ceiling / Floor:  |   | 200 / 200 / 2000 / 750 / 100   |
| Fuel spillage risk:   |   | Compliant  |
| Surface temperature:  |   | Compliant  |
| Electrical safety:  |   | Compliant  |
| Accessibility and cleaning:   |   | Compliant  |
| Emissions of combustion products:   |   |  |
| at rated power / at reduced power (mg/m <sup>3</sup> at 13% O <sub>2</sub> ):   |   | 228 / -  |
| Maximum operating pressure: kPa(Bar):   |   | N.A.   |
| Smoke temperature at rated power (°C):  |   | 203  |
| Mechanical strength (to support the chimney):   |   | Compliant  |
| Rated thermal power (kW)  |   | 7.9  |
| Heat output in the environment (kW):  |   | 7.9  |
| Heat output transferred to water (kW):  |   | -  |
| Efficiency at rated power (%):  |   | 87   |
| Efficiency at reduced power (%):  |   | -  |
| 9 - The performance of the appliance referred to in points 1 and 2 complies with the performance declared in point 8.     |   |  |
| This declaration of performance is issued under the sole responsibility of the manufacturer as of point 4.                |   |  |
| Arsiero, 12/01/2026   |   | Firma/Signature:<br><br><small>THERMOROSSI S.p.A.<br/>Uff. Amministrativa</small> |


Installation, use and maintenance guide  
**SKYLINE – PANORAMA – FULLMOON – MOONLIGHT – TRILOGIE**


**ENG**

| <b>THERMOROSSI</b><br><small>Fire Lovers</small>   | <b>DECLARATION OF PERFORMANCE IN ACCORDANCE WITH<br/>REGULATION (EU) 305/2011</b> | n°A204  |
|--|---|---|
| 1 - Unique identification code of the product type:  |   | SKYLINE 1000 10   |
| 2 - Model, batch, series (Art. 11, paragraph 4):   |   | SKYLINE 1000 10   |
| 3 - Intended uses of the construction product, in accordance with the applicable harmonised technical specification:     |   | Residential space heating appliance without water fired by wood logs                  |
| 4 - Name and address of the manufacturer (Art. 11, paragraph 5):   |   | THERMOROSSI S.P.A. Via Grumolo, n° 4 36011 Arsiero (VI) Italy Tel.0445/741310         |
| 5 - Name and address of the authorised representative (Article 12, paragraph 2):   |   | -   |
| 6 - System of assessment and verification of constancy of performance of the construction product as set out in Annex V: |   | System 3 and 4  |
| 7 - Notified laboratory:   |   | Kiwa Italia S.p.a. N° 0476  |
| Harmonised technical specification:  |   | EN 16510-2-1  |
| Test report number based on System 3:  |   | 0476-AoP-CPR-3014283  |
| 8 - Declared performance:  |   |   |
| <b>Essential characteristics</b>   |   | <b>Performance</b>  |
| Fire resistance:   |   | A1  |
| Minimum safety distances from combustible materials in mm:   |   |   |
| Rear / Side / Front / Ceiling / Floor:   |   | 200 / 200 / 2000 / 750 / 100  |
| Fuel spillage risk:  |   | Compliant   |
| Surface temperature:   |   | Compliant   |
| Electrical safety:   |   | Compliant   |
| Accessibility and cleaning:  |   | Compliant   |
| Emissions of combustion products:  |   |   |
| at rated power / at reduced power (mg/m <sup>3</sup> at 13% O <sub>2</sub> ):  |   | 150 / -   |
| Maximum operating pressure: kPa(Bar)   |   | N.A.  |
| Smoke temperature at rated power (°C):   |   | 240   |
| Mechanical strength (to support the chimney):  |   | Compliant   |
| Rated thermal power (kW)   |   | 9.9   |
| Heat output in the environment (kW):   |   | 9.9   |
| Heat output transferred to water (kW):   |   | -   |
| Efficiency at rated power (%):   |   | 86  |
| Efficiency at reduced power (%):   |   | -   |
| 9 - The performance of the appliance referred to in points 1 and 2 complies with the performance declared in point 8.    |   |   |
| This declaration of performance is issued under the sole responsibility of the manufacturer as of point 4.               |   |   |
| Arsiero, 12/01/2026  |   |  |

| <b>THERMOROSSI</b><br><small>Fire Lovers</small>   | <b>DECLARATION OF PERFORMANCE IN ACCORDANCE WITH<br/>REGULATION (EU) 305/2011</b> | n°A205  |
|--|---|---|
| 1 - Unique identification code of the product type:  |   | SKYLINE EVO6 1000 11  |
| 2 - Model, batch, series (Art. 11, paragraph 4):   |   | SKYLINE EVO6 1000 11  |
| 3 - Intended uses of the construction product, in accordance with the applicable harmonised technical specification:     |   | Residential space heating appliance without water fired by wood logs                                      |
| 4 - Name and address of the manufacturer (Art. 11, paragraph 5):   |   | THERMOROSSI S.P.A. Via Grumolo, n° 4 36011 Arsiero (VI) Italy Tel.0445/741310                             |
| 5 - Name and address of the authorised representative (Article 12, paragraph 2):   |   | -   |
| 6 - System of assessment and verification of constancy of performance of the construction product as set out in Annex V: |   | System 3 and 4  |
| 7 - Notified laboratory:   |   | Kiwa Italia S.p.a. N° 0476  |
| Harmonised technical specification:  |   | EN 16510-2-1  |
| Test report number based on System 3:  |   | 0476-AoP-CPR-3014283  |
| 8 - Declared performance:  |   |   |
| <b>Essential characteristics</b>   |   | <b>Performance</b>  |
| Fire resistance:   |   | A1  |
| Minimum safety distances from combustible materials in mm:   |   |   |
| Rear / Side / Front / Ceiling / Floor:   |   | 200 / 200 / 2000 / 750 / 100  |
| Fuel spillage risk:  |   | Compliant   |
| Surface temperature:   |   | Compliant   |
| Electrical safety:   |   | Compliant   |
| Accessibility and cleaning:  |   | Compliant   |
| Emissions of combustion products:  |   |   |
| at rated power / at reduced power (mg/m <sup>3</sup> at 13% O <sub>2</sub> ):  |   | 160 / -   |
| Maximum operating pressure: kPa(Bar)   |   | N.A.  |
| Smoke temperature at rated power (°C):   |   | 253   |
| Mechanical strength (to support the chimney):  |   | Compliant   |
| Rated thermal power (kW)   |   | 10.6  |
| Heat output in the environment (kW):   |   | 10.6  |
| Heat output transferred to water (kW):   |   | -   |
| Efficiency at rated power (%):   |   | 86  |
| Efficiency at reduced power (%):   |   | -   |
| 9 - The performance of the appliance referred to in points 1 and 2 complies with the performance declared in point 8.    |   |   |
| This declaration of performance is issued under the sole responsibility of the manufacturer as of point 4.               |   |   |
| Arsiero, 12/01/2026  |   | Firma/Signature:<br> |


*Installation, use and maintenance guide*  
**SKYLINE – PANORAMA – FULLMOON – MOONLIGHT – TRILOGIE**


| <b>THERMOROSSI</b><br><small>Fire Lovers</small>  | <b>DECLARATION OF PERFORMANCE IN ACCORDANCE WITH<br/>REGULATION (EU) 305/2011</b> | n°A136   |
|---|---|--|
| 1 - Unique identification code of the product type:   |   | PANORAMA 6   |
| 2 - Model, batch, series (Art. 11, paragraph 4):  |   | PANORAMA 6   |
| 3 - Intended uses of the construction product, in accordance with the applicable harmonised technical specification:      |   | Residential space heating appliance without water fired by wood logs                                     |
| 4 - Name and address of the manufacturer (Art. 11, paragraph 5):  |   | THERMOROSSI S.P.A. Via Grumolo, n° 4 36011 Arsiero (VI) Italy Tel.0445/741310                            |
| 5 - Name and address of the authorised representative (Article 12, paragraph 2):  |   | -  |
| 6 - System of assessment and verification of constancy of performance of the construction product as set out in Annexe V: |   | System 3 and 4   |
| 7 - Notified laboratory:  |   | Kiwa Italia S.p.a. N° 0476   |
| Harmonised technical specification:   |   | EN 16510-2-1   |
| Test report number based on System 3:   |   | 0476-AoP-CPR-3014283   |
| 8 - Declared performance:   |   |  |
| <b>Essential characteristics</b>  |   | <b>Performance</b>   |
| Fire resistance:  |   | A1   |
| Minimum safety distances from combustible materials in mm:  |   |  |
| Rear / Side / Front / Ceiling / Floor:  |   | 200 / 200 / 2000 / 750 / 100   |
| Fuel spillage risk:   |   | Compliant  |
| Surface temperature:  |   | Compliant  |
| Electrical safety:  |   | Compliant  |
| Accessibility and cleaning:   |   | Compliant  |
| Emissions of combustion products:   |   |  |
| at rated power / at reduced power (mg/m <sup>3</sup> at 13% O <sub>2</sub> ):   |   | 348 / -  |
| Maximum operating pressure: kPa(Bar)  |   | N.A.   |
| Smoke temperature at rated power (°C):  |   | 201  |
| Mechanical strength (to support the chimney):   |   | Compliant  |
| Rated thermal power (kW)  |   | 5.7  |
| Heat output in the environment (kW):  |   | 5.7  |
| Heat output transferred to water (kW):  |   | -  |
| Efficiency at rated power (%):  |   | 84   |
| Efficiency at reduced power (%):  |   | -  |
| 9 - The performance of the appliance referred to in points 1 and 2 complies with the performance declared in point 8.     |   |  |
| This declaration of performance is issued under the sole responsibility of the manufacturer as of point 4.                |   |  |
| Arsiero, 12/01/2026   |   | Firma/Signature:<br> |

| <b>THERMOROSSI</b><br><small>Fire Lovers</small>  | <b>DECLARATION OF PERFORMANCE IN ACCORDANCE WITH<br/>REGULATION (EU) 305/2011</b> | n°A137  |
|---|---|---|
| 1 - Unique identification code of the product type:   |   | PANORAMA 8  |
| 2 - Model, batch, series (Art. 11, paragraph 4):  |   | PANORAMA 8  |
| 3 - Intended uses of the construction product, in accordance with the applicable harmonised technical specification:      |   | Residential space heating appliance without water fired by wood logs                                      |
| 4 - Name and address of the manufacturer (Art. 11, paragraph 5):  |   | THERMOROSSI S.P.A. Via Grumolo, n° 4 36011 Arsiero (VI) Italy Tel.0445/741310                             |
| 5 - Name and address of the authorised representative (Article 12, paragraph 2):  |   | -   |
| 6 - System of assessment and verification of constancy of performance of the construction product as set out in Annexe V: |   | System 3 and 4  |
| 7 - Notified laboratory:  |   | Kiwa Italia S.p.a. N° 0476  |
| Harmonised technical specification:   |   | EN 16510-2-1  |
| Test report number based on System 3:   |   | 0476-AoP-CPR-3014283  |
| 8 - Declared performance:   |   |   |
| <b>Essential characteristics</b>  |   | <b>Performance</b>  |
| Fire resistance:  |   | A1  |
| Minimum safety distances from combustible materials in mm:  |   |   |
| Rear / Side / Front / Ceiling / Floor:  |   | 200 / 200 / 2000 / 750 / 100  |
| Fuel spillage risk:   |   | Compliant   |
| Surface temperature:  |   | Compliant   |
| Electrical safety:  |   | Compliant   |
| Accessibility and cleaning:   |   | Compliant   |
| Emissions of combustion products:   |   |   |
| at rated power / at reduced power (mg/m <sup>3</sup> at 13% O <sub>2</sub> ):   |   | 228 / -   |
| Maximum operating pressure: kPa(Bar)  |   | N.A.  |
| Smoke temperature at rated power (°C):  |   | 203   |
| Mechanical strength (to support the chimney):   |   | Compliant   |
| Rated thermal power (kW)  |   | 7.9   |
| Heat output in the environment (kW):  |   | 7.9   |
| Heat output transferred to water (kW):  |   | -   |
| Efficiency at rated power (%):  |   | 87  |
| Efficiency at reduced power (%):  |   | -   |
| 9 - The performance of the appliance referred to in points 1 and 2 complies with the performance declared in point 8.     |   |   |
| This declaration of performance is issued under the sole responsibility of the manufacturer as of point 4.                |   |   |
| Arsiero, 12/01/2026   |   | Firma/Signature:<br> |


*Installation, use and maintenance guide*  
**SKYLINE – PANORAMA – FULLMOON – MOONLIGHT – TRILOGIE**


**ENG**

| <b>THERMOROSSI</b><br><small>Fire Lovers</small>   | <b>DECLARATION OF PERFORMANCE IN ACCORDANCE WITH<br/>REGULATION (EU) 305/2011</b> | n°A138  |
|--|---|---|
| 1 - Unique identification code of the product type:  |   | PANORAMA 10   |
| 2 - Model, batch, series (Art. 11, paragraph 4):   |   | PANORAMA 10   |
| 3 - Intended uses of the construction product, in accordance with the applicable harmonised technical specification:     |   | Residential space heating appliance without water fired by wood logs                                      |
| 4 - Name and address of the manufacturer (Art. 11, paragraph 5):   |   | THERMOROSSI S.P.A. Via Grumolo, n° 4 36011 Arsiero (VI) Italy Tel.0445/741310                             |
| 5 - Name and address of the authorised representative (Article 12, paragraph 2):   |   | -   |
| 6 - System of assessment and verification of constancy of performance of the construction product as set out in Annex V: |   | System 3 and 4  |
| 7 - Notified laboratory:   |   | Kiwa Italia S.p.a. N° 0476  |
| Harmonised technical specification:  |   | EN 16510-2-1  |
| Test report number based on System 3:  |   | 0476-AoP-CPR-3014283  |
| 8 - Declared performance:  |   |   |
| <b>Essential characteristics</b>   |   | <b>Performance</b>  |
| Fire resistance:   |   | A1  |
| Minimum safety distances from combustible materials in mm:   |   |   |
| Rear / Side / Front / Ceiling / Floor:   |   | 200 / 200 / 2000 / 750 / 100  |
| Fuel spillage risk:  |   | Compliant   |
| Surface temperature:   |   | Compliant   |
| Electrical safety:   |   | Compliant   |
| Accessibility and cleaning:  |   | Compliant   |
| Emissions of combustion products:  |   |   |
| at rated power / at reduced power (mg/m <sup>3</sup> at 13% O <sub>2</sub> ):  |   | 150 / -   |
| Maximum operating pressure: kPa(Bar)   |   | N.A.  |
| Smoke temperature at rated power (°C):   |   | 240   |
| Mechanical strength (to support the chimney):  |   | Compliant   |
| Rated thermal power (kW)   |   | 9.9   |
| Heat output in the environment (kW):   |   | 9.9   |
| Heat output transferred to water (kW):   |   | -   |
| Efficiency at rated power (%):   |   | 86  |
| Efficiency at reduced power (%):   |   | -   |
| 9 - The performance of the appliance referred to in points 1 and 2 complies with the performance declared in point 8.    |   |   |
| This declaration of performance is issued under the sole responsibility of the manufacturer as of point 4.               |   |   |
| Arsiero, 12/01/2026  |   | Firma/Signature:<br> |

| <b>THERMOROSSI</b><br><small>Fire Lovers</small>   | <b>DECLARATION OF PERFORMANCE IN ACCORDANCE WITH<br/>REGULATION (EU) 305/2011</b> | n°A178  |
|--|---|---|
| 1 - Unique identification code of the product type:  |   | PANORAMA EVO6 11  |
| 2 - Model, batch, series (Art. 11, paragraph 4):   |   | PANORAMA EVO6 11  |
| 3 - Intended uses of the construction product, in accordance with the applicable harmonised technical specification:     |   | Residential space heating appliance without water fired by wood logs                                      |
| 4 - Name and address of the manufacturer (Art. 11, paragraph 5):   |   | THERMOROSSI S.P.A. Via Grumolo, n° 4 36011 Arsiero (VI) Italy Tel.0445/741310                             |
| 5 - Name and address of the authorised representative (Article 12, paragraph 2):   |   | -   |
| 6 - System of assessment and verification of constancy of performance of the construction product as set out in Annex V: |   | System 3 and 4  |
| 7 - Notified laboratory:   |   | Kiwa Italia S.p.a. N° 0476  |
| Harmonised technical specification:  |   | EN 16510-2-1  |
| Test report number based on System 3:  |   | 0476-AoP-CPR-3014283  |
| 8 - Declared performance:  |   |   |
| <b>Essential characteristics</b>   |   | <b>Performance</b>  |
| Fire resistance:   |   | A1  |
| Minimum safety distances from combustible materials in mm:   |   |   |
| Rear / Side / Front / Ceiling / Floor:   |   | 200 / 200 / 2000 / 750 / 100  |
| Fuel spillage risk:  |   | Compliant   |
| Surface temperature:   |   | Compliant   |
| Electrical safety:   |   | Compliant   |
| Accessibility and cleaning:  |   | Compliant   |
| Emissions of combustion products:  |   |   |
| at rated power / at reduced power (mg/m <sup>3</sup> at 13% O <sub>2</sub> ):  |   | 160 / -   |
| Maximum operating pressure: kPa(Bar)   |   | N.A.  |
| Smoke temperature at rated power (°C):   |   | 253   |
| Mechanical strength (to support the chimney):  |   | Compliant   |
| Rated thermal power (kW)   |   | 10.6  |
| Heat output in the environment (kW):   |   | 10.6  |
| Heat output transferred to water (kW):   |   | -   |
| Efficiency at rated power (%):   |   | 86  |
| Efficiency at reduced power (%):   |   | -   |
| 9 - The performance of the appliance referred to in points 1 and 2 complies with the performance declared in point 8.    |   |   |
| This declaration of performance is issued under the sole responsibility of the manufacturer as of point 4.               |   |   |
| Arsiero, 12/01/2026  |   | Firma/Signature:<br> |


*Installation, use and maintenance guide*  
**SKYLINE – PANORAMA – FULLMOON – MOONLIGHT – TRILOGIE**


| <b>THERMOROSSI</b><br><small>Fire Covers</small>  | <b>DECLARATION OF PERFORMANCE IN ACCORDANCE WITH<br/>REGULATION (EU) 305/2011</b> | n°A140  |
|---|---|---|
| 1 - Unique identification code of the product type:   |   | MOONLIGHT 6   |
| 2 - Model, batch, series (Art. 11, paragraph 4):  |   | MOONLIGHT 6   |
| 3 - Intended uses of the construction product, in accordance with the applicable harmonised technical specification:      |   | Residential space heating appliance without water fired by wood logs                                      |
| 4 - Name and address of the manufacturer (Art. 11, paragraph 5):  |   | THERMOROSSI S.P.A. Via Grumolo, n° 4 36011 Arsiero (VI) Italy Tel.0445/741310                             |
| 5 - Name and address of the authorised representative (Article 12, paragraph 2):  |   | -   |
| 6 - System of assessment and verification of constancy of performance of the construction product as set out in Annexe V: |   | System 3 and 4  |
| 7 - Notified laboratory:  |   | Kiwa Italia S.p.a. N° 0476  |
| Harmonised technical specification:   |   | EN 16510-2-1  |
| Test report number based on System 3:   |   | 0476-AoP-CPR-3014283  |
| 8 - Declared performance:   |   |   |
| <b>Essential characteristics</b>  |   | <b>Performance</b>  |
| Fire resistance:  |   | A1  |
| Minimum safety distances from combustible materials in mm:  |   |   |
| Rear / Side / Front / Ceiling / Floor:  |   | 200 / 200 / 2000 / 750 / 100  |
| Fuel spillage risk:   |   | Compliant   |
| Surface temperature:  |   | Compliant   |
| Electrical safety:  |   | Compliant   |
| Accessibility and cleaning:   |   | Compliant   |
| Emissions of combustion products:   |   |   |
| at rated power / at reduced power (mg/m <sup>3</sup> at 13% O <sub>2</sub> ):   |   | 348 / -   |
| Maximum operating pressure: kPa(Bar)  |   | N.A.  |
| Smoke temperature at rated power (°C):  |   | 201   |
| Mechanical strength (to support the chimney):   |   | Compliant   |
| Rated thermal power (kW)  |   | 5.7   |
| Heat output in the environment (kW):  |   | 5.7   |
| Heat output transferred to water (kW):  |   | -   |
| Efficiency at rated power (%):  |   | 84  |
| Efficiency at reduced power (%):  |   | -   |
| 9 - The performance of the appliance referred to in points 1 and 2 complies with the performance declared in point 8.     |   |   |
| This declaration of performance is issued under the sole responsibility of the manufacturer as of point 4.                |   |   |
| Arsiero, 12/01/2026   |   | Firma/Signature:<br> |

| <b>THERMOROSSI</b><br><small>Fire Covers</small>  | <b>DECLARATION OF PERFORMANCE IN ACCORDANCE WITH<br/>REGULATION (EU) 305/2011</b> | n°A141  |
|---|---|---|
| 1 - Unique identification code of the product type:   |   | MOONLIGHT 8   |
| 2 - Model, batch, series (Art. 11, paragraph 4):  |   | MOONLIGHT 8   |
| 3 - Intended uses of the construction product, in accordance with the applicable harmonised technical specification:      |   | Residential space heating appliance without water fired by wood logs                                      |
| 4 - Name and address of the manufacturer (Art. 11, paragraph 5):  |   | THERMOROSSI S.P.A. Via Grumolo, n° 4 36011 Arsiero (VI) Italy Tel.0445/741310                             |
| 5 - Name and address of the authorised representative (Article 12, paragraph 2):  |   | -   |
| 6 - System of assessment and verification of constancy of performance of the construction product as set out in Annexe V: |   | System 3 and 4  |
| 7 - Notified laboratory:  |   | Kiwa Italia S.p.a. N° 0476  |
| Harmonised technical specification:   |   | EN 16510-2-1  |
| Test report number based on System 3:   |   | 0476-AoP-CPR-3014283  |
| 8 - Declared performance:   |   |   |
| <b>Essential characteristics</b>  |   | <b>Performance</b>  |
| Fire resistance:  |   | A1  |
| Minimum safety distances from combustible materials in mm:  |   |   |
| Rear / Side / Front / Ceiling / Floor:  |   | 200 / 200 / 2000 / 750 / 100  |
| Fuel spillage risk:   |   | Compliant   |
| Surface temperature:  |   | Compliant   |
| Electrical safety:  |   | Compliant   |
| Accessibility and cleaning:   |   | Compliant   |
| Emissions of combustion products:   |   |   |
| at rated power / at reduced power (mg/m <sup>3</sup> at 13% O <sub>2</sub> ):   |   | 228 / -   |
| Maximum operating pressure: kPa(Bar)  |   | N.A.  |
| Smoke temperature at rated power (°C):  |   | 203   |
| Mechanical strength (to support the chimney):   |   | Compliant   |
| Rated thermal power (kW)  |   | 7.9   |
| Heat output in the environment (kW):  |   | 7.9   |
| Heat output transferred to water (kW):  |   | -   |
| Efficiency at rated power (%):  |   | 87  |
| Efficiency at reduced power (%):  |   | -   |
| 9 - The performance of the appliance referred to in points 1 and 2 complies with the performance declared in point 8.     |   |   |
| This declaration of performance is issued under the sole responsibility of the manufacturer as of point 4.                |   |   |
| Arsiero, 12/01/2026   |   | Firma/Signature:<br> |


*Installation, use and maintenance guide*  
**SKYLINE – PANORAMA – FULLMOON – MOONLIGHT – TRILOGIE**


**ENG**


| <b>THERMOROSSI</b><br><small>Fire Lovers</small>   | <b>DECLARATION OF PERFORMANCE IN ACCORDANCE WITH<br/>REGULATION (EU) 305/2011</b> | n°A142  |
|--|---|---|
| 1 - Unique identification code of the product type:  |   | MOONLIGHT 10  |
| 2 - Model, batch, series (Art. 11, paragraph 4):   |   | MOONLIGHT 10  |
| 3 - Intended uses of the construction product, in accordance with the applicable harmonised technical specification:     |   | Residential space heating appliance without water fired by wood logs                                      |
| 4 - Name and address of the manufacturer (Art. 11, paragraph 5):   |   | THERMOROSSI S.P.A. Via Grumolo, n° 4 36011 Arsiero (VI) Italy Tel.0445/741310                             |
| 5 - Name and address of the authorised representative (Article 12, paragraph 2):   |   | -   |
| 6 - System of assessment and verification of constancy of performance of the construction product as set out in Annex V: |   | System 3 and 4  |
| 7 - Notified laboratory:   |   | Kiwa Italia S.p.a. N° 0476  |
| Harmonised technical specification:  |   | EN 16510-2-1  |
| Test report number based on System 3:  |   | 0476-AoP-CPR-3014283  |
| 8 - Declared performance:  |   |   |
| <b>Essential characteristics</b>   |   | <b>Performance</b>  |
| Fire resistance:   |   | A1  |
| Minimum safety distances from combustible materials in mm:   |   |   |
| Rear / Side / Front / Ceiling / Floor:   |   | 200 / 200 / 2000 / 750 / 100  |
| Fuel spillage risk:  |   | Compliant   |
| Surface temperature:   |   | Compliant   |
| Electrical safety:   |   | Compliant   |
| Accessibility and cleaning:  |   | Compliant   |
| Emissions of combustion products:  |   |   |
| at rated power / at reduced power (mg/m <sup>3</sup> at 13% O <sub>2</sub> ):  |   | 150 / -   |
| Maximum operating pressure: kPa(Bar)   |   | N.A.  |
| Smoke temperature at rated power (°C):   |   | 240   |
| Mechanical strength (to support the chimney):  |   | Compliant   |
| Rated thermal power (kW)   |   | 9.9   |
| Heat output in the environment (kW):   |   | 9.9   |
| Heat output transferred to water (kW):   |   | -   |
| Efficiency at rated power (%):   |   | 86  |
| Efficiency at reduced power (%):   |   | -   |
| 9 - The performance of the appliance referred to in points 1 and 2 complies with the performance declared in point 8.    |   |   |
| This declaration of performance is issued under the sole responsibility of the manufacturer as of point 4.               |   |   |
| Arsiero, 12/01/2026  |   | Firma/Signature:<br> |


| <b>THERMOROSSI</b><br><small>Fire Lovers</small>   | <b>DECLARATION OF PERFORMANCE IN ACCORDANCE WITH<br/>REGULATION (EU) 305/2011</b> | n°A179  |
|--|---|---|
| 1 - Unique identification code of the product type:  |   | MOONLIGHT EVO6 11   |
| 2 - Model, batch, series (Art. 11, paragraph 4):   |   | MOONLIGHT EVO6 11   |
| 3 - Intended uses of the construction product, in accordance with the applicable harmonised technical specification:     |   | Residential space heating appliance without water fired by wood logs                                      |
| 4 - Name and address of the manufacturer (Art. 11, paragraph 5):   |   | THERMOROSSI S.P.A. Via Grumolo, n° 4 36011 Arsiero (VI) Italy Tel.0445/741310                             |
| 5 - Name and address of the authorised representative (Article 12, paragraph 2):   |   | -   |
| 6 - System of assessment and verification of constancy of performance of the construction product as set out in Annex V: |   | System 3 and 4  |
| 7 - Notified laboratory:   |   | Kiwa Italia S.p.a. N° 0476  |
| Harmonised technical specification:  |   | EN 16510-2-1  |
| Test report number based on System 3:  |   | 0476-AoP-CPR-3014283  |
| 8 - Declared performance:  |   |   |
| <b>Essential characteristics</b>   |   | <b>Performance</b>  |
| Fire resistance:   |   | A1  |
| Minimum safety distances from combustible materials in mm:   |   |   |
| Rear / Side / Front / Ceiling / Floor:   |   | 200 / 200 / 2000 / 750 / 100  |
| Fuel spillage risk:  |   | Compliant   |
| Surface temperature:   |   | Compliant   |
| Electrical safety:   |   | Compliant   |
| Accessibility and cleaning:  |   | Compliant   |
| Emissions of combustion products:  |   |   |
| at rated power / at reduced power (mg/m <sup>3</sup> at 13% O <sub>2</sub> ):  |   | 160 / -   |
| Maximum operating pressure: kPa(Bar)   |   | N.A.  |
| Smoke temperature at rated power (°C):   |   | 253   |
| Mechanical strength (to support the chimney):  |   | Compliant   |
| Rated thermal power (kW)   |   | 10.6  |
| Heat output in the environment (kW):   |   | 10.6  |
| Heat output transferred to water (kW):   |   | -   |
| Efficiency at rated power (%):   |   | 86  |
| Efficiency at reduced power (%):   |   | -   |
| 9 - The performance of the appliance referred to in points 1 and 2 complies with the performance declared in point 8.    |   |   |
| This declaration of performance is issued under the sole responsibility of the manufacturer as of point 4.               |   |   |
| Arsiero, 12/01/2026  |   | Firma/Signature:<br> |

*Installation, use and maintenance guide*  
**SKYLINE – PANORAMA – FULLMOON – MOONLIGHT – TRILOGIE**


| <b>THERMOROSSI</b><br><small>Fire Covers</small>  | <b>DECLARATION OF PERFORMANCE IN ACCORDANCE WITH<br/>REGULATION (EU) 305/2011</b> | n°A206   |
|---|---|--|
| 1 - Unique identification code of the product type:   |   | FULLMOON 6   |
| 2 - Model, batch, series (Art. 11, paragraph 4):  |   | FULLMOON 6   |
| 3 - Intended uses of the construction product, in accordance with the applicable harmonised technical specification:      |   | Residential space heating appliance without water fired by wood logs   |
| 4 - Name and address of the manufacturer (Art. 11, paragraph 5):  |   | THERMOROSSI S.P.A. Via Grumolo, n° 4 36011 Arsiero (VI) Italy Tel.0445/741310  |
| 5 - Name and address of the authorised representative (Article 12, paragraph 2):  |   | -  |
| 6 - System of assessment and verification of constancy of performance of the construction product as set out in Annexe V: |   | System 3 and 4   |
| 7 - Notified laboratory:  |   | Kiwa Italia S.p.a. N° 0476   |
| Harmonised technical specification:   |   | EN 16510-2-1   |
| Test report number based on System 3:   |   | 0476-AoP-CPR-3014283   |
| 8 - Declared performance:   |   |  |
| <b>Essential characteristics</b>  |   | <b>Performance</b>   |
| Fire resistance:  |   | A1   |
| Minimum safety distances from combustible materials in mm:  |   |  |
| Rear / Side / Front / Ceiling / Floor:  |   | 200 / 200 / 2000 / 750 / 100   |
| Fuel spillage risk:   |   | Compliant  |
| Surface temperature:  |   | Compliant  |
| Electrical safety:  |   | Compliant  |
| Accessibility and cleaning:   |   | Compliant  |
| Emissions of combustion products:   |   |  |
| at rated power / at reduced power (mg/m <sup>3</sup> at 13% O <sub>2</sub> ):   |   | 348 / -  |
| Maximum operating pressure: kPa(Bar)  |   | N.A.   |
| Smoke temperature at rated power (°C):  |   | 201  |
| Mechanical strength (to support the chimney):   |   | Compliant  |
| Rated thermal power (kW)  |   | 5.7  |
| Heat output in the environment (kW):  |   | 5.7  |
| Heat output transferred to water (kW):  |   | -  |
| Efficiency at rated power (%):  |   | 84   |
| Efficiency at reduced power (%):  |   | -  |
| 9 - The performance of the appliance referred to in points 1 and 2 complies with the performance declared in point 8.     |   |  |
| This declaration of performance is issued under the sole responsibility of the manufacturer as of point 4.                |   |  |
| Arsiero, 12/01/2026   |   | Firma/Signature:<br><br>THERMOROSSI S.P.A.<br>Un Amministratore |


| <b>THERMOROSSI</b><br><small>Fire Covers</small>  | <b>DECLARATION OF PERFORMANCE IN ACCORDANCE WITH<br/>REGULATION (EU) 305/2011</b> | n°A207   |
|---|---|--|
| 1 - Unique identification code of the product type:   |   | FULLMOON 8   |
| 2 - Model, batch, series (Art. 11, paragraph 4):  |   | FULLMOON 8   |
| 3 - Intended uses of the construction product, in accordance with the applicable harmonised technical specification:      |   | Residential space heating appliance without water fired by wood logs   |
| 4 - Name and address of the manufacturer (Art. 11, paragraph 5):  |   | THERMOROSSI S.P.A. Via Grumolo, n° 4 36011 Arsiero (VI) Italy Tel.0445/741310  |
| 5 - Name and address of the authorised representative (Article 12, paragraph 2):  |   | -  |
| 6 - System of assessment and verification of constancy of performance of the construction product as set out in Annexe V: |   | System 3 and 4   |
| 7 - Notified laboratory:  |   | Kiwa Italia S.p.a. N° 0476   |
| Harmonised technical specification:   |   | EN 16510-2-1   |
| Test report number based on System 3:   |   | 0476-AoP-CPR-3014283   |
| 8 - Declared performance:   |   |  |
| <b>Essential characteristics</b>  |   | <b>Performance</b>   |
| Fire resistance:  |   | A1   |
| Minimum safety distances from combustible materials in mm:  |   |  |
| Rear / Side / Front / Ceiling / Floor:  |   | 200 / 200 / 2000 / 750 / 100   |
| Fuel spillage risk:   |   | Compliant  |
| Surface temperature:  |   | Compliant  |
| Electrical safety:  |   | Compliant  |
| Accessibility and cleaning:   |   | Compliant  |
| Emissions of combustion products:   |   |  |
| at rated power / at reduced power (mg/m <sup>3</sup> at 13% O <sub>2</sub> ):   |   | 228 / -  |
| Maximum operating pressure: kPa(Bar)  |   | N.A.   |
| Smoke temperature at rated power (°C):  |   | 203  |
| Mechanical strength (to support the chimney):   |   | Compliant  |
| Rated thermal power (kW)  |   | 7.9  |
| Heat output in the environment (kW):  |   | 7.9  |
| Heat output transferred to water (kW):  |   | -  |
| Efficiency at rated power (%):  |   | 87   |
| Efficiency at reduced power (%):  |   | -  |
| 9 - The performance of the appliance referred to in points 1 and 2 complies with the performance declared in point 8.     |   |  |
| This declaration of performance is issued under the sole responsibility of the manufacturer as of point 4.                |   |  |
| Arsiero, 12/01/2026   |   | Firma/Signature:<br><br>THERMOROSSI S.P.A.<br>Un Amministratore |

| <b>THERMOROSSI</b><br><i>The Lovers</i>  | <b>DECLARATION OF PERFORMANCE IN ACCORDANCE WITH<br/>REGULATION (EU) 305/2011</b> | n°A208  |
|--|---|---|
| 1 - Unique identification code of the product type:  |   | FULLMOON 10   |
| 2 - Model, batch, series (Art. 11, paragraph 4):   |   | FULLMOON 10   |
| 3 - Intended uses of the construction product, in accordance with the applicable harmonised technical specification:     |   | Residential space heating appliance without water fired by wood logs                                      |
| 4 - Name and address of the manufacturer (Art. 11, paragraph 5):   |   | THERMOROSSI S.P.A. Via Grumolo, n° 4 36011 Arsiero (VI) Italy Tel.0445/741310                             |
| 5 - Name and address of the authorised representative (Article 12, paragraph 2):   |   | -   |
| 6 - System of assessment and verification of constancy of performance of the construction product as set out in Annex V: |   | System 3 and 4  |
| 7 - Notified laboratory:   |   | Kiwa Italia S.p.a. N° 0476  |
| Harmonised technical specification:  |   | EN 16510-2-1  |
| Test report number based on System 3:  |   | 0476-AoP-CPR-3014283  |
| 8 - Declared performance:  |   |   |
| <b>Essential characteristics</b>   |   | <b>Performance</b>  |
| Fire resistance:   |   | A1  |
| Minimum safety distances from combustible materials in mm:   |   |   |
| Rear / Side / Front / Ceiling / Floor:   |   | 200 / 200 / 2000 / 750 / 100  |
| Fuel spillage risk:  |   | Compliant   |
| Surface temperature:   |   | Compliant   |
| Electrical safety:   |   | Compliant   |
| Accessibility and cleaning:  |   | Compliant   |
| Emissions of combustion products:  |   |   |
| at rated power / at reduced power (mg/m <sup>3</sup> at 13% O <sub>2</sub> ):  |   | 150 / -   |
| Maximum operating pressure: kPa(Bar)   |   | N.A.  |
| Smoke temperature at rated power (°C):   |   | 240   |
| Mechanical strength (to support the chimney):  |   | Compliant   |
| Rated thermal power (kW)   |   | 9.9   |
| Heat output in the environment (kW):   |   | 9.9   |
| Heat output transferred to water (kW):   |   | -   |
| Efficiency at rated power (%):   |   | 86  |
| Efficiency at reduced power (%):   |   | -   |
| 9 - The performance of the appliance referred to in points 1 and 2 complies with the performance declared in point 8.    |   |   |
| This declaration of performance is issued under the sole responsibility of the manufacturer as of point 4.               |   |   |
| Arsiero, 12/01/2026  |   | Firma/Signature:<br> |

| <b>THERMOROSSI</b><br><i>The Lovers</i>  | <b>DECLARATION OF PERFORMANCE IN ACCORDANCE WITH<br/>REGULATION (EU) 305/2011</b> | n°A209  |
|--|---|---|
| 1 - Unique identification code of the product type:  |   | FULLMOON EVO6 1000 11   |
| 2 - Model, batch, series (Art. 11, paragraph 4):   |   | FULLMOON EVO6 1000 11   |
| 3 - Intended uses of the construction product, in accordance with the applicable harmonised technical specification:     |   | Residential space heating appliance without water fired by wood logs                                      |
| 4 - Name and address of the manufacturer (Art. 11, paragraph 5):   |   | THERMOROSSI S.P.A. Via Grumolo, n° 4 36011 Arsiero (VI) Italy Tel.0445/741310                             |
| 5 - Name and address of the authorised representative (Article 12, paragraph 2):   |   | -   |
| 6 - System of assessment and verification of constancy of performance of the construction product as set out in Annex V: |   | System 3 and 4  |
| 7 - Notified laboratory:   |   | Kiwa Italia S.p.a. N° 0476  |
| Harmonised technical specification:  |   | EN 16510-2-1  |
| Test report number based on System 3:  |   | 0476-AoP-CPR-3014283  |
| 8 - Declared performance:  |   |   |
| <b>Essential characteristics</b>   |   | <b>Performance</b>  |
| Fire resistance:   |   | A1  |
| Minimum safety distances from combustible materials in mm:   |   |   |
| Rear / Side / Front / Ceiling / Floor:   |   | 200 / 200 / 2000 / 750 / 100  |
| Fuel spillage risk:  |   | Compliant   |
| Surface temperature:   |   | Compliant   |
| Electrical safety:   |   | Compliant   |
| Accessibility and cleaning:  |   | Compliant   |
| Emissions of combustion products:  |   |   |
| at rated power / at reduced power (mg/m <sup>3</sup> at 13% O <sub>2</sub> ):  |   | 160 / -   |
| Maximum operating pressure: kPa(Bar)   |   | N.A.  |
| Smoke temperature at rated power (°C):   |   | 253   |
| Mechanical strength (to support the chimney):  |   | Compliant   |
| Rated thermal power (kW)   |   | 10.6  |
| Heat output in the environment (kW):   |   | 10.6  |
| Heat output transferred to water (kW):   |   | -   |
| Efficiency at rated power (%):   |   | 86  |
| Efficiency at reduced power (%):   |   | -   |
| 9 - The performance of the appliance referred to in points 1 and 2 complies with the performance declared in point 8.    |   |   |
| This declaration of performance is issued under the sole responsibility of the manufacturer as of point 4.               |   |   |
| Arsiero, 12/01/2026  |   | Firma/Signature:<br> |


*Installation, use and maintenance guide*  
**SKYLINE – PANORAMA – FULLMOON – MOONLIGHT – TRILOGIE**


| <b>THERMOROSSI</b><br><small>Fire Covers</small>  | <b>DECLARATION OF PERFORMANCE IN ACCORDANCE WITH<br/>REGULATION (EU) 305/2011</b> | n°A144  |
|---|---|---|
| 1 - Unique identification code of the product type:   |   | TRILOGIE 6  |
| 2 - Model, batch, series (Art. 11, paragraph 4):  |   | TRILOGIE 6  |
| 3 - Intended uses of the construction product, in accordance with the applicable harmonised technical specification:      |   | Residential space heating appliance without water fired by wood logs                                      |
| 4 - Name and address of the manufacturer (Art. 11, paragraph 5):  |   | THERMOROSSI S.P.A. Via Grumolo, n° 4 36011 Arsiero (VI) Italy Tel.0445/741310                             |
| 5 - Name and address of the authorised representative (Article 12, paragraph 2):  |   | -   |
| 6 - System of assessment and verification of constancy of performance of the construction product as set out in Annexe V: |   | System 3 and 4  |
| 7 - Notified laboratory:  |   | Kiwa Italia S.p.a. N° 0476  |
| Harmonised technical specification:   |   | EN 16510-2-1  |
| Test report number based on System 3:   |   | 0476-AoP-CPR-3014283  |
| 8 - Declared performance:   |   |   |
| <b>Essential characteristics</b>  |   | <b>Performance</b>  |
| Fire resistance:  |   | A1  |
| Minimum safety distances from combustible materials in mm:  |   |   |
| Rear / Side / Front / Ceiling / Floor:  |   | 200 / 200 / 2000 / 750 / 100  |
| Fuel spillage risk:   |   | Compliant   |
| Surface temperature:  |   | Compliant   |
| Electrical safety:  |   | Compliant   |
| Accessibility and cleaning:   |   | Compliant   |
| Emissions of combustion products:   |   |   |
| at rated power / at reduced power (mg/m <sup>3</sup> at 13% O <sub>2</sub> ):   |   | 348 / -   |
| Maximum operating pressure: kPa(Bar)  |   | N.A.  |
| Smoke temperature at rated power (°C):  |   | 201   |
| Mechanical strength (to support the chimney):   |   | Compliant   |
| Rated thermal power (kW)  |   | 5.7   |
| Heat output in the environment (kW):  |   | 5.7   |
| Heat output transferred to water (kW):  |   | -   |
| Efficiency at rated power (%):  |   | 84  |
| Efficiency at reduced power (%):  |   | -   |
| 9 - The performance of the appliance referred to in points 1 and 2 complies with the performance declared in point 8.     |   |   |
| This declaration of performance is issued under the sole responsibility of the manufacturer as of point 4.                |   |   |
| Arsiero, 12/01/2026   |   | Firma/Signature:<br> |

| <b>THERMOROSSI</b><br><small>Fire Covers</small>  | <b>DECLARATION OF PERFORMANCE IN ACCORDANCE WITH<br/>REGULATION (EU) 305/2011</b> | n°A145  |
|---|---|---|
| 1 - Unique identification code of the product type:   |   | TRILOGIE 8  |
| 2 - Model, batch, series (Art. 11, paragraph 4):  |   | TRILOGIE 8  |
| 3 - Intended uses of the construction product, in accordance with the applicable harmonised technical specification:      |   | Residential space heating appliance without water fired by wood logs                                      |
| 4 - Name and address of the manufacturer (Art. 11, paragraph 5):  |   | THERMOROSSI S.P.A. Via Grumolo, n° 4 36011 Arsiero (VI) Italy Tel.0445/741310                             |
| 5 - Name and address of the authorised representative (Article 12, paragraph 2):  |   | -   |
| 6 - System of assessment and verification of constancy of performance of the construction product as set out in Annexe V: |   | System 3 and 4  |
| 7 - Notified laboratory:  |   | Kiwa Italia S.p.a. N° 0476  |
| Harmonised technical specification:   |   | EN 16510-2-1  |
| Test report number based on System 3:   |   | 0476-AoP-CPR-3014283  |
| 8 - Declared performance:   |   |   |
| <b>Essential characteristics</b>  |   | <b>Performance</b>  |
| Fire resistance:  |   | A1  |
| Minimum safety distances from combustible materials in mm:  |   |   |
| Rear / Side / Front / Ceiling / Floor:  |   | 200 / 200 / 2000 / 750 / 100  |
| Fuel spillage risk:   |   | Compliant   |
| Surface temperature:  |   | Compliant   |
| Electrical safety:  |   | Compliant   |
| Accessibility and cleaning:   |   | Compliant   |
| Emissions of combustion products:   |   |   |
| at rated power / at reduced power (mg/m <sup>3</sup> at 13% O <sub>2</sub> ):   |   | 228 / -   |
| Maximum operating pressure: kPa(Bar)  |   | N.A.  |
| Smoke temperature at rated power (°C):  |   | 203   |
| Mechanical strength (to support the chimney):   |   | Compliant   |
| Rated thermal power (kW)  |   | 7.9   |
| Heat output in the environment (kW):  |   | 7.9   |
| Heat output transferred to water (kW):  |   | -   |
| Efficiency at rated power (%):  |   | 87  |
| Efficiency at reduced power (%):  |   | -   |
| 9 - The performance of the appliance referred to in points 1 and 2 complies with the performance declared in point 8.     |   |   |
| This declaration of performance is issued under the sole responsibility of the manufacturer as of point 4.                |   |   |
| Arsiero, 12/01/2026   |   | Firma/Signature:<br> |

*Installation, use and maintenance guide*  
**SKYLINE – PANORAMA – FULLMOON – MOONLIGHT – TRILOGIE**

**ENG**

| <b>THERMOROSSI</b><br><small>Fire Lovers</small>   | <b>DECLARATION OF PERFORMANCE IN ACCORDANCE WITH<br/>REGULATION (EU) 305/2011</b> | n°A146  |
|--|---|---|
| 1 - Unique identification code of the product type:  |   | TRILOGIE 10   |
| 2 - Model, batch, series (Art. 11, paragraph 4):   |   | TRILOGIE 10   |
| 3 - Intended uses of the construction product, in accordance with the applicable harmonised technical specification:     |   | Residential space heating appliance without water fired by wood logs                                      |
| 4 - Name and address of the manufacturer (Art. 11, paragraph 5):   |   | THERMOROSSI S.P.A. Via Grumolo, n° 4 36011 Arsiero (VI) Italy Tel.0445/741310                             |
| 5 - Name and address of the authorised representative (Article 12, paragraph 2):   |   | -   |
| 6 - System of assessment and verification of constancy of performance of the construction product as set out in Annex V: |   | System 3 and 4  |
| 7 - Notified laboratory:   |   | Kiwa Italia S.p.a. N° 0476  |
| Harmonised technical specification:  |   | EN 16510-2-1  |
| Test report number based on System 3:  |   | 0476-AoP-CPR-3014283  |
| 8 - Declared performance:  |   |   |
| <b>Essential characteristics</b>   |   | <b>Performance</b>  |
| Fire resistance:   |   | A1  |
| Minimum safety distances from combustible materials in mm:   |   |   |
| Rear / Side / Front / Ceiling / Floor:   |   | 200 / 200 / 2000 / 750 / 100  |
| Fuel spillage risk:  |   | Compliant   |
| Surface temperature:   |   | Compliant   |
| Electrical safety:   |   | Compliant   |
| Accessibility and cleaning:  |   | Compliant   |
| Emissions of combustion products:  |   |   |
| at rated power / at reduced power (mg/m <sup>3</sup> at 13% O <sub>2</sub> ):  |   | 150 / -   |
| Maximum operating pressure: kPa(Bar)   |   | N.A.  |
| Smoke temperature at rated power (°C):   |   | 240   |
| Mechanical strength (to support the chimney):  |   | Compliant   |
| Rated thermal power (kW)   |   | 9.9   |
| Heat output in the environment (kW):   |   | 9.9   |
| Heat output transferred to water (kW):   |   | -   |
| Efficiency at rated power (%):   |   | 86  |
| Efficiency at reduced power (%):   |   | -   |
| 9 - The performance of the appliance referred to in points 1 and 2 complies with the performance declared in point 8.    |   |   |
| This declaration of performance is issued under the sole responsibility of the manufacturer as of point 4.               |   |   |
| Arsiero, 12/01/2026  |   | Firma/Signature:<br> |

| <b>THERMOROSSI</b><br><small>Fire Lovers</small>   | <b>DECLARATION OF PERFORMANCE IN ACCORDANCE WITH<br/>REGULATION (EU) 305/2011</b> | n°A180  |
|--|---|---|
| 1 - Unique identification code of the product type:  |   | TRILOGIE EVO6 11  |
| 2 - Model, batch, series (Art. 11, paragraph 4):   |   | TRILOGIE EVO6 11  |
| 3 - Intended uses of the construction product, in accordance with the applicable harmonised technical specification:     |   | Residential space heating appliance without water fired by wood logs                                      |
| 4 - Name and address of the manufacturer (Art. 11, paragraph 5):   |   | THERMOROSSI S.P.A. Via Grumolo, n° 4 36011 Arsiero (VI) Italy Tel.0445/741310                             |
| 5 - Name and address of the authorised representative (Article 12, paragraph 2):   |   | -   |
| 6 - System of assessment and verification of constancy of performance of the construction product as set out in Annex V: |   | System 3 and 4  |
| 7 - Notified laboratory:   |   | Kiwa Italia S.p.a. N° 0476  |
| Harmonised technical specification:  |   | EN 16510-2-1  |
| Test report number based on System 3:  |   | 0476-AoP-CPR-3014283  |
| 8 - Declared performance:  |   |   |
| <b>Essential characteristics</b>   |   | <b>Performance</b>  |
| Fire resistance:   |   | A1  |
| Minimum safety distances from combustible materials in mm:   |   |   |
| Rear / Side / Front / Ceiling / Floor:   |   | 200 / 200 / 2000 / 750 / 100  |
| Fuel spillage risk:  |   | Compliant   |
| Surface temperature:   |   | Compliant   |
| Electrical safety:   |   | Compliant   |
| Accessibility and cleaning:  |   | Compliant   |
| Emissions of combustion products:  |   |   |
| at rated power / at reduced power (mg/m <sup>3</sup> at 13% O <sub>2</sub> ):  |   | 160 / -   |
| Maximum operating pressure: kPa(Bar)   |   | N.A.  |
| Smoke temperature at rated power (°C):   |   | 253   |
| Mechanical strength (to support the chimney):  |   | Compliant   |
| Rated thermal power (kW)   |   | 10.6  |
| Heat output in the environment (kW):   |   | 10.6  |
| Heat output transferred to water (kW):   |   | -   |
| Efficiency at rated power (%):   |   | 86  |
| Efficiency at reduced power (%):   |   | -   |
| 9 - The performance of the appliance referred to in points 1 and 2 complies with the performance declared in point 8.    |   |   |
| This declaration of performance is issued under the sole responsibility of the manufacturer as of point 4.               |   |   |
| Arsiero, 12/01/2026  |   | Firma/Signature:<br> |

*Installation, use and maintenance guide*  
**SKYLINE – PANORAMA – FULLMOON – MOONLIGHT – TRILOGIE**

| IT – SCHEDA PRODOTTO (UE 2015/1186)<br>EN – PRODUCT FICHE (EU 2015/1186)<br>FR – FICHE PRODUIT (UE 2015/1186)<br>NL – PRODUCTGEGEVENSBLAD (EU 2015/1186)<br>DE – PRODUKTDATENBLATT (EU 2015/1186)<br>ES – FICHA DE PRODUCTO (UE 2015/1186)   | IT – MARCHIO<br>EN – BRAND<br>FR – MARQUE<br>NL – MERK<br>DE – MARKE<br>ES – MARCA | <b>THERMOROSSI S.P.A.</b>                       |   |   |  |   |  |
|--|--|---|---|---|--|---|--|
| IT – MODELLO<br>EN – MODEL<br>FR – MODÈLE<br>NL – MODEL<br>DE – MODELL<br>ES – MODELO  | SKYLINE<br>490 8<br>PANORAMA<br>490 8  | SKYLINE<br>EVO6 490 9<br>PANORAMA<br>EVO6 490 9 | SKYLINE 540 6<br>SKYLINE 800 6<br>SKYLINE 1000 6<br>PANORAMA 6<br>MOONLIGHT 6<br>FULLMOON 6<br>TRILOGIE 6 | SKYLINE 540 8<br>SKYLINE 800 8<br>SKYLINE 1000 8<br>PANORAMA 8<br>MOONLIGHT 8<br>FULLMOON 8<br>TRILOGIE 8 | SKYLINE 540 10<br>SKYLINE 800 10<br>SKYLINE 1000 10<br>PANORAMA 10<br>MOONLIGHT 10<br>FULLMOON 10<br>TRILOGIE 10 | SKYLINE EVO6 540 11<br>SKYLINE EVO6 800 11<br>SKYLINE EVO6 1000 11<br>PANORAMA EVO6 11<br>MOONLIGHT EVO6 11<br>FULLMOON EVO6 11<br>TRILOGIE EVO6 11 |  |
| IT – CLASSE DI EFFICIENZA ENERGETICA<br>EN – ENERGY EFFICIENCY CLASS<br>FR – CLASSE D'EFFICACITÉ ÉNERGÉTIQUE<br>NL – ENERGIE EFFICIENTIEKLASSE<br>DE – ENERGIEEFFIZIENZKLASSE<br>ES – CLASE DE EFICIENCIA ENERGÉTICA   | <b>A +</b>   | <b>A +</b>                                      | <b>A +</b>  | <b>A +</b>  | <b>A +</b>   | <b>A +</b>  |  |
| IT – POTENZA TERMICA DIRETTA<br>EN – DIRECT HEAT OUTPUT<br>FR – PUISSANCE THERMIQUE DIRECTE<br>NL – DIREKTE WARMTEAFGIFTE<br>DE – DIREKTE WÄRMELEISTUNG<br>ES – POTENCIA CALORÍFICA DIRECTA  | <b>7.9</b>   | <b>9.3</b>                                      | <b>5.7</b>  | <b>7.9</b>  | <b>9.9</b>   | <b>10.6</b>   |  |
| IT – POTENZA TERMICA INDIRETTA<br>EN – INDIRECT HEAT OUTPUT<br>FR – PUISSANCE THERMIQUE INDIRECTE<br>NL – INDIRECTE WARMTEAFGIFTE<br>DE – INDIRECTE WÄRMELEISTUNG<br>ES – POTENCIA CALORÍFICA INDIRECTA  | -  | -   | -   | -   | -  | -   |  |
| IT – INDICE DI EFFICIENZA ENERGETICA<br>EN – ENERGY EFFICIENCY INDEX<br>FR – INDICE D'EFFICACITÉ ÉNERGÉTIQUE<br>NL – ENERGIE-EFFICIENTIE-INDEX<br>DE – ENERGIEEFFIZIENZINDEX<br>ES – ÍNDICE DE EFICIENCIA ENERGÉTICA   | <b>113</b>   | <b>115</b>                                      | <b>112</b>  | <b>116</b>  | <b>115</b>   | <b>115</b>  |  |
| IT – EFFICIENZA UTILE ALLA POTENZA TERMICA NOMINALE<br>EN – USEFUL ENERGY EFFICIENCY AT NOMINAL HEAT OUTPUT<br>FR – RENDEMENT UTILE À LA PUISSANCE THERMIQUE NOMINALE<br>NL – NUTTIG RENDEMENT BIJ NOMINALE VERMOGEN<br>DE – BRENNSTOFF-ENERGIEEFFIZIENZ BEI NENNWÄRMELEISTUNG<br>ES – EFICIENCIA ENERGÉTICA ÚTIL A POTENCIA CALORÍFICA NOMINAL  | <b>85</b>  | <b>86</b>                                       | <b>84</b>   | <b>87</b>   | <b>86</b>  | <b>86</b>   |  |
| IT – EFFICIENZA UTILE AL CARICO MINIMO<br>EN – USEFUL ENERGY EFFICIENCY AT MINIMUM LOAD<br>FR – RENDEMENT UTILE À LA CHARGE MINIMALE<br>NL – NUTTIG RENDEMENT BIJ MINIMALE WARMTEAFGIFTE<br>DE – BRENNSTOFF-ENERGIEEFFIZIENZ BEI MINDESTLAST<br>ES – EFICIENCIA ENERGÉTICA ÚTIL A CARGA MÍNIMA   | -  | -   | -   | -   | -  | -   |  |
| IT – RISPETTARE TUTTE LE ISTRUZIONI RIPORTATE SUL MANUALE DI INSTALLAZIONE USO E MANUTENZIONE<br>EN – ALWAYS FOLLOW THE INSTRUCTIONS PROVIDED IN THE OPERATING AND MAINTENANCE MANUAL<br>FR – RESPECTER TOUTES LES INSTRUCTIONS CITÉES DANS LA NOTICE D'INSTALLATION, UTILISATION ET ENTRETIEN<br>NL – RESPECTER ALLE INSTRUCTIES VERMELD IN DE HANDLEIDING VOOR INSTALLATIE, GEBRUIK EN ONDERHOUD<br>DE – ALLE ANWEISUNGEN BEZÜGLICH INSTALLATION, NUTZUNG UND WARTUNG IN DER BEDIENUNGSANLEITUNG MÜSSEN UNBEDINGT EINGEHALTEN WERDEN!<br>ES – RESPECTAR LAS INSTRUCCIONES REPORTADAS EN EL MANUAL DE UTILIZACIÓN Y MANTENIMIENTO |  |   |   |   |  |   |  |

## **1 – INTRODUCTION**

### **1.1 SAFETY GUIDELINES**

This installation, use and maintenance manual is an integral and essential part of the product and must be kept by the user. Before commencing with the installation, use and maintenance of the product, carefully read this guide. All local, national and European regulations regarding the installation and use of the appliance must be met. The Manufacturer recommends carrying out all the maintenance operations described in this manual.

This appliance must only be used as intended by the manufacturer. Any other use is considered incorrect and therefore hazardous; consequently, the user shall be totally liable for the product if used improperly. Installation, maintenance and repairs must be carried out by professionally qualified personnel, certified according to Decree no. 37 of 22 January 2008 and in compliance with current regulations. In case of repairs only original spare parts supplied by the manufacturer must be used. Incorrect installation or poor maintenance can injure or damage people, animals or things; in this case the manufacturer shall be relieved of all responsibility. Any repairs or actions carried out on any systems, components or internal parts of the appliance, or on any of the accessories supplied with it, that are not specifically authorised by Thermorossi S.p.A, will automatically void the warranty and the manufacturer's responsibility, pursuant to Italian Decree no. 224 of the President of the Republic of 24/05/1988, art. 6/b. It is recommended to keep this manual in a safe place that is easily accessible to all users. If the manual is lost or deteriorated contact the manufacturer for a replacement copy. If the appliance is sold or transferred to another user ensure that the manual is handed over with it. The images and figures featured in this manual are purely illustrative and may differ from the actual product. Furthermore, Thermorossi reserves the right to apply changes to the content of this manual anytime and without notice.

*Thermorossi S.p.A. retains copyright on this manual. These instructions may not be reproduced or communicated to third parties or used in any other way without the necessary authorisation.*

### **1.2 SAFETY STANDARDS**



#### **PERSONAL INJURY**

This safety symbol identifies important messages throughout the manual. Read the information marked by this symbol carefully as non-observance of this message can cause serious injury to persons using the appliance.



#### **DAMAGE TO PROPERTY**

This safety symbol identifies messages or instructions that are fundamental for the appliance and system to function well. To avoid serious damage to the appliance adhere strictly to these instructions.

#### **INFORMATION**

This symbol indicates important instructions for good functioning of the appliance. If this information is not correctly observed, the performance of the appliance will not be satisfactory.

### **1.3 RECOMMENDATIONS**



Read this entire use and maintenance manual carefully before using the appliance as familiarity with the information and instructions contained in it are essential for the correct use of the appliance.

No responsibility will be accepted for damages, even to third parties, if the instructions for installation, use and maintenance of the appliance are not followed scrupulously. Modifications made to the appliance by the user or on his behalf, must be considered to be under his complete responsibility. The user is responsible for all the operations required for the maintenance of the appliance before and during its use.



Should you notice an excessive stagnation of flue gas in the combustion chamber, move away from the appliance immediately. In particular move away from the glass door of the combustion chamber. The excessive concentration of unburned gases could create an explosion that could break the glass. Do not open the loading door for any reason whatsoever and do not approach the product until the flame has died down. Contact a technical service centre to determine the causes. Do not turn on the appliance for any reason whatsoever following an event such as this.

### **1.4 GENERAL GUIDELINES**

The product must not be used by children under the age of 8 years, by persons with physical, mental or sensorial impairments, or by persons who are not familiar with the instructions for use and maintenance of the product (the instructions are found in this manual). Children must not play with the appliance.

**ATTENTION:** before lighting check that the grate of the combustion chamber is clean and that the ash pan is clean. **ATTENTION:** it is strictly forbidden to open the door while the flame is still burning. During operation, the smoke exhaust pipes, door, handles and some parts of the appliance may reach extremely high temperatures: be careful not to touch them and also educate children to be aware of said risks. Do not expose your body to hot air for long, do not overheat the room in which the appliance is installed, as these actions could cause health problems. Do not expose plants or animals directly to the hot air flow as this could have noxious effects on them. Do not place non-heat resistant or inflammable or combustible objects in the vicinity of the appliance: keep them at a suitable distance. Do not place wet clothing to dry on the appliance. When using a clothes horse, keep at a suitable distance.



Attention: do not wet the appliance. Never vacuum hot ash: this could damage the vacuum device. All the cleaning operations described in this manual must be carried out when the appliance is cold.



Attention! Warning for Swiss users

Refer to the local cantonal regulations imposed by the Fire Department (Mandatory signalling and safety distances) and the Note concerning installation of heaters issued by the Association of Cantonal Fire Agencies (VKF - AEAI).

## 1.5 TRANSPORTATION AND STORAGE

### TRANSPORTATION AND HANDLING

The appliance body must always be handled exclusively by means of trolleys. Take special care to protect the glass and all the fragile parts from mechanical impact which could damage them and their correct functioning.

### STORAGE


The appliance must be stored in a humid-free environment and sheltered from the weather; avoid placing the appliance directly on the ground. The Company denies all responsibility for damage caused to wood floors or floors made from any other material. It is inadvisable to store the product for long periods of time.

## 1.6 GUIDELINES FOR CORRECT DISPOSAL OF THE PRODUCT



At the end of the product's useful life, it must be disposed of in compliance with applicable regulations and in respect of the environment, not with urban waste. The product must be consigned to designated sorted waste collection centres for the disposal of waste authorised by the local municipal councils. Correct disposal not only helps safeguard the environment but it also promotes recovery and recycling of the materials.


## 2 – TECHNICAL CHARACTERISTICS
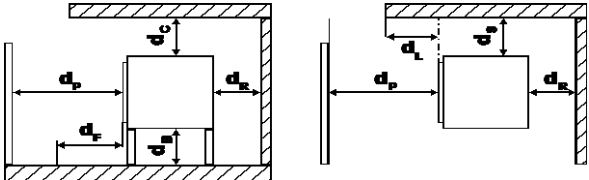
|   | PARAMETER                                    | UNIT              | SKYLINE 490 8<br>PANORAMA 490 8 | SKYLINE 490 EVO 9<br>PANORAMA EVO6 490 9 |
|---|--|-------------------|---------------------------------|--|
| Thermal power at firebox**  | <b>Pfoc</b>                                  | kW                | 9.3                             | 10.8                                     |
| Rated thermal power**   | <b>Pnom</b>                                  | kW                | 7.9                             | 9.3                                      |
| Thermal power output to the room**  | <b>PSHnom</b>                                | kW                | 7.9                             | 9.3                                      |
| Thermal power output to the water**   | <b>PWnom</b>                                 | kW                | -                               | -  |
| Thermal power at partial load**   | <b>Part</b>                                  | kW                | -                               | -  |
| Thermal power output to the room at partial load**                                  | <b>PSHpart</b>                               | kW                | -                               | -  |
| Thermal power output to the water at partial load**                                 | <b>PWpart</b>                                | kW                | -                               | -  |
| Efficiency at rated thermal power**   | <b>ηnom</b>                                  | %                 | 85                              | 86                                       |
| Efficiency with thermal power at partial load**                                     | <b>ηpart</b>                                 | %                 | -                               | -  |
| Consumption at rated power**  | -  | Kg/h              | 2.2                             | 2.5                                      |
| Consumption at reduced power**  | -  | Kg/h              | -                               | -  |
| Tank capacity   | -  | Kg                | -                               | -  |
| Seasonal efficiency at rated thermal power  | <b>ηS</b>                                    | %                 | 75                              | 76                                       |
| Energy Efficiency Index   | <b>EEl</b>                                   | -                 | 113                             | 115                                      |
| CO emissions at 13% O <sub>2</sub> at rated power**                                 | <b>CO<sub>nom</sub> (13%O<sub>2</sub>)</b>   | mg/m <sup>3</sup> | 382                             | 511                                      |
| CO emissions at 13% O <sub>2</sub> at partial load**                                | <b>CO<sub>part</sub> (13%O<sub>2</sub>)</b>  | mg/m <sup>3</sup> | -                               | -  |
| NOx emissions at 13% O <sub>2</sub> at rated power**                                | <b>NO<sub>xnom</sub> (13%O<sub>2</sub>)</b>  | mg/m <sup>3</sup> | 78                              | 75                                       |
| NOx emissions at 13% O <sub>2</sub> at partial load**                               | <b>NO<sub>xpart</sub> (13%O<sub>2</sub>)</b> | mg/m <sup>3</sup> | -                               | -  |
| OGC emissions at 13% O <sub>2</sub> at rated power**                                | <b>OGC<sub>nom</sub> (13%O<sub>2</sub>)</b>  | mg/m <sup>3</sup> | 48                              | 35                                       |
| OGC emissions at 13% O <sub>2</sub> at partial load**                               | <b>OGC<sub>part</sub> (13%O<sub>2</sub>)</b> | mg/m <sup>3</sup> | -                               | -  |
| Particulate emissions at 13% O <sub>2</sub> at rated power**                        | <b>PM<sub>nom</sub> (13%O<sub>2</sub>)</b>   | mg/m <sup>3</sup> | 14                              | 9  |
| Particulate emissions at 13% O <sub>2</sub> at partial load**                       | <b>PM<sub>part</sub> (13%O<sub>2</sub>)</b>  | mg/m <sup>3</sup> | -                               | -  |
| Minimum flue outlet draught at rated power  | <b>p<sub>nom</sub></b>                       | Pa                | 12                              | 12                                       |
| Minimum flue outlet draught at partial load   | <b>p<sub>part</sub></b>                      | Pa                | 12                              | 12                                       |
| Maximum allowable working pressure of the water                                     | <b>p<sub>W</sub></b>                         | bar               | -                               | -  |
| Water content of the appliance  |  | l                 | -                               | -  |
| Minimum safety distances from combustible material                                  |  | mm                | 200                             | 200                                      |
|  | <b>d<sub>S</sub></b>                         | mm                | 200                             | 200                                      |
|   | <b>d<sub>C</sub></b>                         | mm                | 750                             | 750                                      |
|   | <b>d<sub>P</sub></b>                         | mm                | 2000                            | 2000                                     |
|   | <b>d<sub>F</sub></b>                         | mm                | 1500                            | 1500                                     |
|   | <b>d<sub>L</sub></b>                         | mm                | 1500                            | 1500                                     |
|   | <b>d<sub>B</sub></b>                         | mm                | 100                             | 100                                      |
| Minimum distances from non-combustible walls  | <b>d<sub>non</sub></b>                       | mm                | 50                              | 50                                       |
| Electric power consumption in standby mode  | <b>e<sub>lSB</sub></b>                       | kW                | -                               | -  |
| Electric power consumption at rated power   | <b>e<sub>lmax</sub></b>                      | kW                | -                               | -  |
| Electric power consumption at reduced power   | <b>e<sub>lmin</sub></b>                      | kW                | -                               | -  |
| Power supply voltage, frequency   | <b>E, f</b>                                  | V, Hz             | -                               | -  |
| Maximum electrical power consumption  | <b>V<sub>max</sub></b>                       | W                 | -                               | -  |
| Exhaust gas temperature at rated power**  | <b>T<sub>snom</sub></b>                      | °C                | 221                             | 210                                      |
| Exhaust gas temperature at partial load**   | <b>T<sub>spart</sub></b>                     | °C                | -                               | -  |
| Chimney designation   | <b>T<sub>class</sub></b>                     | -                 | T400G                           | T400G                                    |
| Exhaust gas flow rate at rated power**  | <b>φ<sub>f,g nom</sub></b>                   | g/s               | 5.9                             | 6.8                                      |
| Exhaust gas flow rate at partial load**   | <b>φ<sub>f,g part</sub></b>                  | g/s               | -                               | -  |
| Continuous operation (CON) or intermittent operation (INT)                          | <b>CON or INT</b>                            | -                 | INT                             | INT                                      |
| Exhaust gas outlet diameter   | <b>d<sub>out</sub></b>                       | mm                | 130                             | 130                                      |
| Type of appliance   | <b>TYPE</b>                                  | -                 | TYPE B                          | TYPE B                                   |
| Air tightness leakage   | <b>V<sub>h</sub></b>                         | m <sup>3</sup> /h | -                               | -  |
| Depth, height, width  | <b>L, H, W</b>                               | mm                | 483, 490, 690                   | 483, 490, 690                            |
| Empty weight  | <b>m</b>                                     | Kg                | 131                             | 131                                      |
| Maximum supported weight of the flue outlet   | <b>m<sub>chin</sub></b>                      | Kg                | 0                               | 0  |
| Heatable volume*  |  | m <sup>3</sup>    | 213                             | 251                                      |
| Firebox feed opening dimensions (mm) (LxH)  |  |                   | 557x253                         |  |
| Firebox dimensions (mm) (LxHxD)   |  |                   | 557x222x342                     |  |

*Installation, use and maintenance guide*  
**SKYLINE – PANORAMA – FULLMOON – MOONLIGHT – TRILOGIE**

|   | PARAMETER                                   | UNIT              | SKYLINE<br>540 6 | SKYLINE<br>540 8 | SKYLINE<br>540 10 | SKYLINE<br>EVO6<br>540 11 |
|---|---|-------------------|------------------|------------------|-------------------|---------------------------|
| Thermal power at firebox**  | <b>Pfoc</b>                                 | kW                | 6.8              | 9                | 11.5              | 12.5                      |
| Rated thermal power**   | <b>Pnom</b>                                 | kW                | 5.7              | 7.9              | 9.9               | 10.6                      |
| Thermal power output to the room**                                | <b>PSHnom</b>                               | kW                | 5.7              | 7.9              | 9.9               | 10.6                      |
| Thermal power output to the water**                               | <b>PWnom</b>                                | kW                | -                | -                | -                 | -                         |
| Thermal power at partial load**                                   | <b>Part</b>                                 | kW                | -                | -                | -                 | -                         |
| Thermal power output to the room at partial load**                | <b>PSHpart</b>                              | kW                | -                | -                | -                 | -                         |
| Thermal power output to the water at partial load**               | <b>PWpart</b>                               | kW                | -                | -                | -                 | -                         |
| Efficiency at rated thermal power**                               | <b>ηnom</b>                                 | %                 | 84               | 87               | 86                | 86                        |
| Efficiency with thermal power at partial load**                   | <b>ηpart</b>                                | %                 | -                | -                | -                 | -                         |
| Consumption at rated power**                                      | -   | Kg/h              | 1.6              | 2.1              | 2.7               | 2.9                       |
| Consumption at reduced power**                                    | -   | Kg/h              | -                | -                | -                 | -                         |
| Tank capacity   | -   | Kg                | -                | -                | -                 | -                         |
| Seasonal efficiency at rated thermal power                        | <b>ηS</b>                                   | %                 | 74               | 77               | 76                | 76                        |
| Energy Efficiency Index   | <b>EEl</b>                                  | -                 | 112              | 116              | 115               | 115                       |
| CO emissions at 13% O <sub>2</sub> at rated power**               | <b>CO<sub>nom</sub> (13%O<sub>2</sub>)</b>  | mg/m <sup>3</sup> | 348              | 228              | 150               | 160                       |
| CO emissions at 13% O <sub>2</sub> at partial load**              | <b>CO<sub>part</sub> (13%O<sub>2</sub>)</b> | mg/m <sup>3</sup> | -                | -                | -                 | -                         |
| NO <sub>x</sub> emissions at 13% O <sub>2</sub> at rated power**  | <b>NO<sub>xnom</sub></b>                    | mg/m <sup>3</sup> | 77               | 69               | 68                | 64                        |
| NO <sub>x</sub> emissions at 13% O <sub>2</sub> at partial load** | <b>NO<sub>xpart</sub></b>                   | mg/m <sup>3</sup> | -                | -                | -                 | -                         |
| OGC emissions at 13% O <sub>2</sub> at rated power**              | <b>OGC<sub>nom</sub></b>                    | mg/m <sup>3</sup> | 80               | 67               | 34                | 22                        |
| OGC emissions at 13% O <sub>2</sub> at partial load**             | <b>OGC<sub>part</sub></b>                   | mg/m <sup>3</sup> | -                | -                | -                 | -                         |
| Particulate emissions at 13% O <sub>2</sub> at rated power**      | <b>PM<sub>nom</sub> (13%O<sub>2</sub>)</b>  | mg/m <sup>3</sup> | 18               | 17               | 15                | 9                         |
| Particulate emissions at 13% O <sub>2</sub> at partial load**     | <b>PM<sub>part</sub> (13%O<sub>2</sub>)</b> | mg/m <sup>3</sup> | -                | -                | -                 | -                         |
| Minimum flue outlet draught at rated power                        | <b>p<sub>nom</sub></b>                      | Pa                | 12               | 12               | 12                | 12                        |
| Minimum flue outlet draught at partial load                       | <b>p<sub>part</sub></b>                     | Pa                | 12               | 12               | 12                | 12                        |
| Maximum allowable working pressure of the water                   | <b>p<sub>W</sub></b>                        | bar               | -                | -                | -                 | -                         |
| Water content of the appliance                                    |   | l                 | -                | -                | -                 | -                         |
| Minimum safety distances from combustible material                | <b>d<sub>R</sub></b>                        | mm                | 200              | 200              | 200               | 200                       |
|   | <b>d<sub>S</sub></b>                        | mm                | 200              | 200              | 200               | 200                       |
|   | <b>d<sub>C</sub></b>                        | mm                | 750              | 750              | 750               | 750                       |
|   | <b>d<sub>P</sub></b>                        | mm                | 2000             | 200              | 2000              | 2000                      |
|   | <b>d<sub>F</sub></b>                        | mm                | 1500             | 1500             | 1500              | 1500                      |
|   | <b>d<sub>L</sub></b>                        | mm                | 1500             | 1500             | 1500              | 1500                      |
|   | <b>d<sub>B</sub></b>                        | mm                | 100              | 100              | 100               | 100                       |
| Minimum distances from non-combustible walls                      | <b>d<sub>non</sub></b>                      | mm                | 50               | 50               | 50                | 50                        |
| Electric power consumption in standby mode                        | <b>e<sub>ISB</sub></b>                      | kW                | -                | -                | -                 | -                         |
| Electric power consumption at rated power                         | <b>e<sub>lmax</sub></b>                     | kW                | -                | -                | -                 | -                         |
| Electric power consumption at reduced power                       | <b>e<sub>lmin</sub></b>                     | kW                | -                | -                | -                 | -                         |
| Power supply voltage, frequency                                   | <b>E, f</b>                                 | V, Hz             | -                | -                | -                 | -                         |
| Maximum electrical power consumption                              | <b>V<sub>max</sub></b>                      | W                 | -                | -                | -                 | -                         |
| Exhaust gas temperature at rated power**                          | <b>T<sub>snom</sub></b>                     | °C                | 201              | 203              | 240               | 253                       |
| Exhaust gas temperature at partial load**                         | <b>T<sub>spart</sub></b>                    | °C                | -                | -                | -                 | -                         |
| Chimney designation   | <b>T<sub>class</sub></b>                    | -                 | T400G            | T400G            | T400G             | T400G                     |
| Exhaust gas flow rate at rated power**                            | <b>φ<sub>f,g nom</sub></b>                  | g/s               | 5.4              | 5.2              | 6                 | 6.4                       |
| Exhaust gas flow rate at partial load**                           | <b>φ<sub>f,g part</sub></b>                 | g/s               | -                | -                | -                 | -                         |
| Continuous operation (CON) or intermittent operation (INT)        | <b>CON or INT</b>                           | -                 | INT              | INT              | INT               | INT                       |
| Exhaust gas outlet diameter                                       | <b>d<sub>out</sub></b>                      | mm                | 130              | 130              | 130               | 130                       |
| Type of appliance   | <b>TYPE</b>                                 | -                 | TYPE B           | TYPE B           | TYPE B            | TYPE B                    |
| Air tightness leakage   | <b>V<sub>h</sub></b>                        | m <sup>3</sup> /h | -                | -                | -                 | -                         |
| Depth, height, width  | <b>L, H, W</b>                              | mm                | 483,<br>540, 690 | 483,<br>540, 690 | 483,<br>540, 690  | 483,<br>540, 690          |
| Empty weight  | <b>m</b>                                    | Kg                | 137              | 137              | 137               | 137                       |
| Maximum supported weight of the flue outlet                       | <b>m<sub>chin</sub></b>                     | Kg                | 0                | 0                | 0                 | 0                         |
| Heatable volume*  |   | m <sup>3</sup>    | 154              | 213              | 267               | 286                       |
| Firebox feed opening dimensions (mm) (LxH)                        |   |                   | 557x302          |                  |                   |                           |
| Firebox dimensions (mm) (LxHxD)                                   |   |                   | 557x271x342      |                  |                   |                           |


|   | PARAMETER                                   | UNIT              | SKYLINE<br>800 6 | SKYLINE<br>800 8 | SKYLINE<br>800 10 | SKYLINE<br>EVO6<br>800 11 |
|---|---|-------------------|------------------|------------------|-------------------|---------------------------|
| Thermal power at firebox**                                    | <b>P<sub>foc</sub></b>                      | kW                | 6.8              | 9                | 11.5              | 12.5                      |
| Rated thermal power**   | <b>P<sub>nom</sub></b>                      | kW                | 5.7              | 7.9              | 9.9               | 10.6                      |
| Thermal power output to the room**                            | <b>PSH<sub>nom</sub></b>                    | kW                | 5.7              | 7.9              | 9.9               | 10.6                      |
| Thermal power output to the water**                           | <b>PW<sub>nom</sub></b>                     | kW                | -                | -                | -                 | -                         |
| Thermal power at partial load**                               | <b>P<sub>part</sub></b>                     | kW                | -                | -                | -                 | -                         |
| Thermal power output to the room at partial load**            | <b>PSH<sub>part</sub></b>                   | kW                | -                | -                | -                 | -                         |
| Thermal power output to the water at partial load**           | <b>PW<sub>part</sub></b>                    | kW                | -                | -                | -                 | -                         |
| Efficiency at rated thermal power**                           | <b>η<sub>nom</sub></b>                      | %                 | 84               | 87               | 86                | 86                        |
| Efficiency with thermal power at partial load**               | <b>η<sub>part</sub></b>                     | %                 | -                | -                | -                 | -                         |
| Consumption at rated power**                                  | -   | Kg/h              | 1.6              | 2.1              | 2.7               | 2.9                       |
| Consumption at reduced power**                                | -   | Kg/h              | -                | -                | -                 | -                         |
| Tank capacity   | -   | Kg                | -                | -                | -                 | -                         |
| Seasonal efficiency at rated thermal power                    | <b>η<sub>S</sub></b>                        | %                 | 74               | 77               | 76                | 76                        |
| Energy Efficiency Index                                       | <b>EEl</b>                                  | -                 | 112              | 116              | 115               | 115                       |
| CO emissions at 13% O <sub>2</sub> at rated power**           | <b>CO<sub>nom</sub> (13%O<sub>2</sub>)</b>  | mg/m <sup>3</sup> | 348              | 228              | 150               | 160                       |
| CO emissions at 13% O <sub>2</sub> at partial load**          | <b>CO<sub>part</sub> (13%O<sub>2</sub>)</b> | mg/m <sup>3</sup> | -                | -                | -                 | -                         |
| NOx emissions at 13% O <sub>2</sub> at rated power**          | <b>NO<sub>xnom</sub></b>                    | mg/m <sup>3</sup> | 77               | 69               | 68                | 64                        |
| NOx emissions at 13% O <sub>2</sub> at partial load**         | <b>NO<sub>xpart</sub></b>                   | mg/m <sup>3</sup> | -                | -                | -                 | -                         |
| OGC emissions at 13% O <sub>2</sub> at rated power**          | <b>OGC<sub>nom</sub></b>                    | mg/m <sup>3</sup> | 80               | 67               | 34                | 22                        |
| OGC emissions at 13% O <sub>2</sub> at partial load**         | <b>OGC<sub>part</sub></b>                   | mg/m <sup>3</sup> | -                | -                | -                 | -                         |
| Particulate emissions at 13% O <sub>2</sub> at rated power**  | <b>PM<sub>nom</sub> (13%O<sub>2</sub>)</b>  | mg/m <sup>3</sup> | 18               | 17               | 15                | 9                         |
| Particulate emissions at 13% O <sub>2</sub> at partial load** | <b>PM<sub>part</sub> (13%O<sub>2</sub>)</b> | mg/m <sup>3</sup> | -                | -                | -                 | -                         |
| Minimum flue outlet draught at rated power                    | <b>p<sub>nom</sub></b>                      | Pa                | 12               | 12               | 12                | 12                        |
| Minimum flue outlet draught at partial load                   | <b>p<sub>part</sub></b>                     | Pa                | 12               | 12               | 12                | 12                        |
| Maximum allowable working pressure of the water               | <b>p<sub>W</sub></b>                        | bar               | -                | -                | -                 | -                         |
| Water content of the appliance                                |   | l                 | -                | -                | -                 | -                         |
| Minimum safety distances from combustible material            | <b>d<sub>R</sub></b>                        | mm                | 200              | 200              | 200               | 200                       |
|   | <b>d<sub>S</sub></b>                        | mm                | 200              | 200              | 200               | 200                       |
|   | <b>d<sub>C</sub></b>                        | mm                | 750              | 750              | 750               | 750                       |
|   | <b>d<sub>P</sub></b>                        | mm                | 2000             | 2000             | 2000              | 2000                      |
|   | <b>d<sub>F</sub></b>                        | mm                | 1500             | 1500             | 1500              | 1500                      |
|   | <b>d<sub>L</sub></b>                        | mm                | 1500             | 1500             | 1500              | 1500                      |
|   | <b>d<sub>B</sub></b>                        | mm                | 100              | 100              | 100               | 100                       |
| Minimum distances from non-combustible walls                  | <b>d<sub>non</sub></b>                      | mm                | 50               | 50               | 50                | 50                        |
| Electric power consumption in standby mode                    | <b>e<sub>LSB</sub></b>                      | kW                | -                | -                | -                 | -                         |
| Electric power consumption at rated power                     | <b>e<sub>lmax</sub></b>                     | kW                | -                | -                | -                 | -                         |
| Electric power consumption at reduced power                   | <b>e<sub>lmin</sub></b>                     | kW                | -                | -                | -                 | -                         |
| Power supply voltage, frequency                               | <b>E, f</b>                                 | V, Hz             | -                | -                | -                 | -                         |
| Maximum electrical power consumption                          | <b>V<sub>max</sub></b>                      | W                 | -                | -                | -                 | -                         |
| Exhaust gas temperature at rated power**                      | <b>T<sub>snom</sub></b>                     | °C                | 201              | 203              | 240               | 253                       |
| Exhaust gas temperature at partial load**                     | <b>T<sub>spart</sub></b>                    | °C                | -                | -                | -                 | -                         |
| Chimney designation   | <b>T<sub>class</sub></b>                    | -                 | T400G            | T400G            | T400G             | T400G                     |
| Exhaust gas flow rate at rated power**                        | <b>φ<sub>f,g nom</sub></b>                  | g/s               | 5.4              | 5.2              | 6                 | 6.4                       |
| Exhaust gas flow rate at partial load**                       | <b>φ<sub>f,g part</sub></b>                 | g/s               | -                | -                | -                 | -                         |
| Continuous operation (CON) or intermittent operation (INT)    | <b>CON or INT</b>                           | -                 | INT              | INT              | INT               | INT                       |
| Exhaust gas outlet diameter                                   | <b>d<sub>out</sub></b>                      | mm                | 130              | 130              | 130               | 130                       |
| Type of appliance   | <b>TYPE</b>                                 | -                 | TYPE B           | TYPE B           | TYPE B            | TYPE B                    |
| Air tightness leakage   | <b>V<sub>h</sub></b>                        | m <sup>3</sup> /h | -                | -                | -                 | -                         |
| Depth, height, width  | <b>L, H, W</b>                              | mm                | 483,<br>540, 785 | 483,<br>540, 785 | 483,<br>540, 785  | 483,<br>540, 785          |
| Empty weight  | <b>m</b>                                    | Kg                | 152              | 152              | 152               | 152                       |
| Maximum supported weight of the flue outlet                   | <b>m<sub>chin</sub></b>                     | Kg                | 0                | 0                | 0                 | 0                         |
| Heatable volume*  |   | m <sup>3</sup>    | 154              | 213              | 267               | 286                       |
| Firebox feed opening dimensions (mm) (LxH)                    |   |                   | 652x302          |                  |                   |                           |
| Firebox dimensions (mm) (LxHxD)                               |   |                   | 652x271x342      |                  |                   |                           |

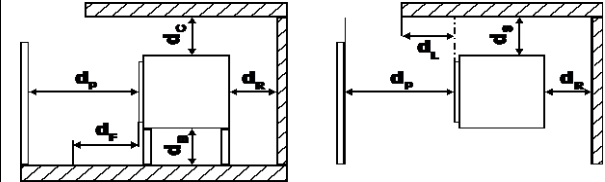

*Installation, use and maintenance guide*  
**SKYLINE – PANORAMA – FULLMOON – MOONLIGHT – TRILOGIE**

|   | PARAMETER                                   | UNIT              | SKYLINE<br>1000 6 | SKYLINE<br>1000 8 | SKYLINE<br>1000 10 | SKYLINE<br>EVO6<br>1000 11 |
|---|---|-------------------|-------------------|-------------------|--------------------|----------------------------|
| Thermal power at firebox**  | <b>Pfoc</b>                                 | kW                | 6.8               | 9                 | 11.5               | 12.5                       |
| Rated thermal power**   | <b>Pnom</b>                                 | kW                | 5.7               | 7.9               | 9.9                | 10.6                       |
| Thermal power output to the room**                                | <b>PSHnom</b>                               | kW                | 5.7               | 7.9               | 9.9                | 10.6                       |
| Thermal power output to the water**                               | <b>PWnom</b>                                | kW                | -                 | -                 | -                  | -                          |
| Thermal power at partial load**                                   | <b>Part</b>                                 | kW                | -                 | -                 | -                  | -                          |
| Thermal power output to the room at partial load**                | <b>PSHpart</b>                              | kW                | -                 | -                 | -                  | -                          |
| Thermal power output to the water at partial load**               | <b>PWpart</b>                               | kW                | -                 | -                 | -                  | -                          |
| Efficiency at rated thermal power**                               | <b>ηnom</b>                                 | %                 | 84                | 87                | 86                 | 86                         |
| Efficiency with thermal power at partial load**                   | <b>ηpart</b>                                | %                 | -                 | -                 | -                  | -                          |
| Consumption at rated power**                                      | -   | Kg/h              | 1.6               | 2.1               | 2.7                | 2.9                        |
| Consumption at reduced power**                                    | -   | Kg/h              | -                 | -                 | -                  | -                          |
| Tank capacity   | -   | Kg                | -                 | -                 | -                  | -                          |
| Seasonal efficiency at rated thermal power                        | <b>ηS</b>                                   | %                 | 74                | 77                | 76                 | 76                         |
| Energy Efficiency Index   | <b>EEl</b>                                  | -                 | 112               | 116               | 115                | 115                        |
| CO emissions at 13% O <sub>2</sub> at rated power**               | <b>CO<sub>nom</sub> (13%O<sub>2</sub>)</b>  | mg/m <sup>3</sup> | 348               | 228               | 150                | 160                        |
| CO emissions at 13% O <sub>2</sub> at partial load**              | <b>CO<sub>part</sub> (13%O<sub>2</sub>)</b> | mg/m <sup>3</sup> | -                 | -                 | -                  | -                          |
| NO <sub>x</sub> emissions at 13% O <sub>2</sub> at rated power**  | <b>NO<sub>xnom</sub></b>                    | mg/m <sup>3</sup> | 77                | 69                | 68                 | 64                         |
| NO <sub>x</sub> emissions at 13% O <sub>2</sub> at partial load** | <b>NO<sub>xpart</sub></b>                   | mg/m <sup>3</sup> | -                 | -                 | -                  | -                          |
| OGC emissions at 13% O <sub>2</sub> at rated power**              | <b>OGC<sub>nom</sub></b>                    | mg/m <sup>3</sup> | 80                | 67                | 34                 | 22                         |
| OGC emissions at 13% O <sub>2</sub> at partial load**             | <b>OGC<sub>part</sub></b>                   | mg/m <sup>3</sup> | -                 | -                 | -                  | -                          |
| Particulate emissions at 13% O <sub>2</sub> at rated power**      | <b>PM<sub>nom</sub> (13%O<sub>2</sub>)</b>  | mg/m <sup>3</sup> | 18                | 17                | 15                 | 9                          |
| Particulate emissions at 13% O <sub>2</sub> at partial load**     | <b>PM<sub>part</sub> (13%O<sub>2</sub>)</b> | mg/m <sup>3</sup> | -                 | -                 | -                  | -                          |
| Minimum flue outlet draught at rated power                        | <b>p<sub>nom</sub></b>                      | Pa                | 12                | 12                | 12                 | 12                         |
| Minimum flue outlet draught at partial load                       | <b>p<sub>part</sub></b>                     | Pa                | 12                | 12                | 12                 | 12                         |
| Maximum allowable working pressure of the water                   | <b>p<sub>W</sub></b>                        | bar               | -                 | -                 | -                  | -                          |
| Water content of the appliance                                    |   | l                 | -                 | -                 | -                  | -                          |
| Minimum safety distances from combustible material                | <b>d<sub>R</sub></b>                        | mm                | 200               | 200               | 200                | 200                        |
|   | <b>d<sub>S</sub></b>                        | mm                | 200               | 200               | 200                | 200                        |
|   | <b>d<sub>C</sub></b>                        | mm                | 750               | 750               | 750                | 750                        |
|   | <b>d<sub>P</sub></b>                        | mm                | 2000              | 2000              | 2000               | 2000                       |
|   | <b>d<sub>F</sub></b>                        | mm                | 1500              | 1500              | 1500               | 1500                       |
|   | <b>d<sub>L</sub></b>                        | mm                | 1500              | 1500              | 1500               | 1500                       |
|   | <b>d<sub>B</sub></b>                        | mm                | 100               | 100               | 100                | 100                        |
| Minimum distances from non-combustible walls                      | <b>d<sub>non</sub></b>                      | mm                | 50                | 50                | 50                 | 50                         |
| Electric power consumption in standby mode                        | <b>e<sub>ISB</sub></b>                      | kW                | -                 | -                 | -                  | -                          |
| Electric power consumption at rated power                         | <b>e<sub>lmax</sub></b>                     | kW                | -                 | -                 | -                  | -                          |
| Electric power consumption at reduced power                       | <b>e<sub>lmin</sub></b>                     | kW                | -                 | -                 | -                  | -                          |
| Power supply voltage, frequency                                   | <b>E, f</b>                                 | V, Hz             | -                 | -                 | -                  | -                          |
| Maximum electrical power consumption                              | <b>V<sub>max</sub></b>                      | W                 | -                 | -                 | -                  | -                          |
| Exhaust gas temperature at rated power**                          | <b>T<sub>snom</sub></b>                     | °C                | 201               | 203               | 240                | 253                        |
| Exhaust gas temperature at partial load**                         | <b>T<sub>spart</sub></b>                    | °C                | -                 | -                 | -                  | -                          |
| Chimney designation   | <b>T<sub>class</sub></b>                    | -                 | T400G             | T400G             | T400G              | T400G                      |
| Exhaust gas flow rate at rated power**                            | <b>φ<sub>f,g nom</sub></b>                  | g/s               | 5.4               | 5.2               | 6                  | 6.4                        |
| Exhaust gas flow rate at partial load**                           | <b>φ<sub>f,g part</sub></b>                 | g/s               | -                 | -                 | -                  | -                          |
| Continuous operation (CON) or intermittent operation (INT)        | <b>CON or INT</b>                           | -                 | INT               | INT               | INT                | INT                        |
| Exhaust gas outlet diameter                                       | <b>d<sub>out</sub></b>                      | mm                | 130               | 130               | 130                | 130                        |
| Type of appliance   | <b>TYPE</b>                                 | -                 | TYPE B            | TYPE B            | TYPE B             | TYPE B                     |
| Air tightness leakage   | <b>V<sub>h</sub></b>                        | m <sup>3</sup> /h | -                 | -                 | -                  | -                          |
| Depth, height, width  | <b>L, H, W</b>                              | mm                | 483,<br>540, 785  | 483,<br>540, 785  | 483,<br>540, 785   | 483,<br>540, 785           |
| Empty weight  | <b>m</b>                                    | Kg                | 182               | 182               | 182                | 182                        |
| Maximum supported weight of the flue outlet                       | <b>m<sub>chin</sub></b>                     | Kg                | 0                 | 0                 | 0                  | 0                          |
| Heatable volume*  |   | m <sup>3</sup>    | 154               | 213               | 267                | 286                        |
| Firebox feed opening dimensions (mm) (LxH)                        |   |                   | 852x302           |                   |                    |                            |
| Firebox dimensions (mm) (LxHxD)                                   |   |                   | 852x271x342       |                   |                    |                            |


|   | PARAMETER                        | UNIT              | PANORAMA<br>6    | PANORAMA<br>8    | PANORAMA<br>10   | PANORAMA<br>EVO6 540 11 |
|---|----------------------------------|-------------------|------------------|------------------|------------------|-------------------------|
| Thermal power at firebox**                                    | <b>Pfoc</b>                      | kW                | 6.8              | 9                | 11.5             | 12.5                    |
| Rated thermal power**   | <b>Pnom</b>                      | kW                | 5.7              | 7.9              | 9.9              | 10.6                    |
| Thermal power output to the room**                            | <b>PSHnom</b>                    | kW                | 5.7              | 7.9              | 9.9              | 10.6                    |
| Thermal power output to the water**                           | <b>PWnom</b>                     | kW                | -                | -                | -                | -                       |
| Thermal power at partial load**                               | <b>Part</b>                      | kW                | -                | -                | -                | -                       |
| Thermal power output to the room at partial load**            | <b>PSHpart</b>                   | kW                | -                | -                | -                | -                       |
| Thermal power output to the water at partial load**           | <b>PWpart</b>                    | kW                | -                | -                | -                | -                       |
| Efficiency at rated thermal power**                           | <b>ηnom</b>                      | %                 | 84               | 87               | 86               | 86                      |
| Efficiency with thermal power at partial load**               | <b>ηpart</b>                     | %                 | -                | -                | -                | -                       |
| Consumption at rated power**                                  | -                                | Kg/h              | 1.6              | 2.1              | 2.7              | 2.9                     |
| Consumption at reduced power**                                | -                                | Kg/h              | -                | -                | -                | -                       |
| Tank capacity   | -                                | Kg                | -                | -                | -                | -                       |
| Seasonal efficiency at rated thermal power                    | <b>ηS</b>                        | %                 | 74               | 77               | 76               | 76                      |
| Energy Efficiency Index                                       | <b>EEl</b>                       | -                 | 112              | 116              | 115              | 115                     |
| CO emissions at 13% O <sub>2</sub> at rated power**           | <b>CONom (13%O<sub>2</sub>)</b>  | mg/m <sup>3</sup> | 348              | 228              | 150              | 160                     |
| CO emissions at 13% O <sub>2</sub> at partial load**          | <b>COpart (13%O<sub>2</sub>)</b> | mg/m <sup>3</sup> | -                | -                | -                | -                       |
| NOx emissions at 13% O <sub>2</sub> at rated power**          | <b>NOxnom</b>                    | mg/m <sup>3</sup> | 77               | 69               | 68               | 64                      |
| NOx emissions at 13% O <sub>2</sub> at partial load**         | <b>NOxpart</b>                   | mg/m <sup>3</sup> | -                | -                | -                | -                       |
| OGC emissions at 13% O <sub>2</sub> at rated power**          | <b>OGCnom</b>                    | mg/m <sup>3</sup> | 80               | 67               | 34               | 22                      |
| OGC emissions at 13% O <sub>2</sub> at partial load**         | <b>OGCpart</b>                   | mg/m <sup>3</sup> | -                | -                | -                | -                       |
| Particulate emissions at 13% O <sub>2</sub> at rated power**  | <b>PMnom (13%O<sub>2</sub>)</b>  | mg/m <sup>3</sup> | 18               | 17               | 15               | 9                       |
| Particulate emissions at 13% O <sub>2</sub> at partial load** | <b>PMpart (13%O<sub>2</sub>)</b> | mg/m <sup>3</sup> | -                | -                | -                | -                       |
| Minimum flue outlet draught at rated power                    | <b>pnom</b>                      | Pa                | 12               | 12               | 12               | 12                      |
| Minimum flue outlet draught at partial load                   | <b>ppart</b>                     | Pa                | 12               | 12               | 12               | 12                      |
| Maximum allowable working pressure of the water               | <b>pW</b>                        | bar               | -                | -                | -                | -                       |
| Water content of the appliance                                |                                  | l                 | -                | -                | -                | -                       |
| Minimum safety distances from combustible material            | <b>dR</b>                        | mm                | 200              | 200              | 200              | 200                     |
|   | <b>dS</b>                        | mm                | 200              | 200              | 200              | 200                     |
|   | <b>dC</b>                        | mm                | 750              | 750              | 750              | 750                     |
|   | <b>dP</b>                        | mm                | 2000             | 200              | 2000             | 2000                    |
|   | <b>dF</b>                        | mm                | 1500             | 1500             | 1500             | 1500                    |
|   | <b>dL</b>                        | mm                | 1500             | 1500             | 1500             | 1500                    |
|   | <b>dB</b>                        | mm                | 100              | 100              | 100              | 100                     |
| Minimum distances from non-combustible walls                  | <b>dnon</b>                      | mm                | 50               | 50               | 50               | 50                      |
| Electric power consumption in standby mode                    | <b>eLSB</b>                      | kW                | -                | -                | -                | -                       |
| Electric power consumption at rated power                     | <b>eLmax</b>                     | kW                | -                | -                | -                | -                       |
| Electric power consumption at reduced power                   | <b>eLmin</b>                     | kW                | -                | -                | -                | -                       |
| Power supply voltage, frequency                               | <b>E, f</b>                      | V, Hz             | -                | -                | -                | -                       |
| Maximum electrical power consumption                          | <b>Vmax</b>                      | W                 | -                | -                | -                | -                       |
| Exhaust gas temperature at rated power**                      | <b>Tsnom</b>                     | °C                | 201              | 203              | 240              | 253                     |
| Exhaust gas temperature at partial load**                     | <b>Tspart</b>                    | °C                | -                | -                | -                | -                       |
| Chimney designation   | <b>Tclass</b>                    | -                 | T400G            | T400G            | T400G            | T400G                   |
| Exhaust gas flow rate at rated power**                        | <b>φf,g nom</b>                  | g/s               | 5.4              | 5.2              | 6                | 6.4                     |
| Exhaust gas flow rate at partial load**                       | <b>φf,g part</b>                 | g/s               | -                | -                | -                | -                       |
| Continuous operation (CON) or intermittent operation (INT)    | <b>CON or INT</b>                | -                 | INT              | INT              | INT              | INT                     |
| Exhaust gas outlet diameter                                   | <b>dout</b>                      | mm                | 130              | 130              | 130              | 130                     |
| Type of appliance   | <b>TYPE</b>                      | -                 | TYPE B           | TYPE B           | TYPE B           | TYPE B                  |
| Air tightness leakage   | <b>Vh</b>                        | m <sup>3</sup> /h | -                | -                | -                | -                       |
| Depth, height, width  | <b>L, H, W</b>                   | mm                | 483, 540,<br>690 | 483, 540,<br>690 | 483, 540,<br>690 | 483, 540,<br>690        |
| Empty weight  | <b>m</b>                         | Kg                | 137              | 137              | 137              | 137                     |
| Maximum supported weight of the flue outlet                   | <b>mchin</b>                     | Kg                | 0                | 0                | 0                | 0                       |
| Heatable volume*  |                                  | m <sup>3</sup>    | 154              | 213              | 267              | 286                     |
| Firebox feed opening dimensions (mm) (LxH)                    |                                  |                   | 557x302          |                  |                  |                         |
| Firebox dimensions (mm) (LxHxD)                               |                                  |                   | 557x271x342      |                  |                  |                         |

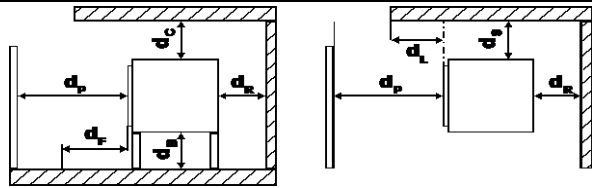


*Installation, use and maintenance guide*  
**SKYLINE – PANORAMA – FULLMOON – MOONLIGHT – TRILOGIE**

|   | PARAMETER                                   | UNIT              | MOONLIGHT<br>6    | MOONLIGHT<br>8    | MOONLIGHT<br>10   | MOONLIGHT<br>EVO6 11 |
|---|---|-------------------|-------------------|-------------------|-------------------|----------------------|
| Thermal power at firebox**  | <b>Pfoc</b>                                 | kW                | 6.8               | 9                 | 11.5              | 12.5                 |
| Rated thermal power**   | <b>Pnom</b>                                 | kW                | 5.7               | 7.9               | 9.9               | 10.6                 |
| Thermal power output to the room**                                | <b>PSHnom</b>                               | kW                | 5.7               | 7.9               | 9.9               | 10.6                 |
| Thermal power output to the water**                               | <b>PWnom</b>                                | kW                | -                 | -                 | -                 | -                    |
| Thermal power at partial load**                                   | <b>Part</b>                                 | kW                | -                 | -                 | -                 | -                    |
| Thermal power output to the room at partial load**                | <b>PSHpart</b>                              | kW                | -                 | -                 | -                 | -                    |
| Thermal power output to the water at partial load**               | <b>PWpart</b>                               | kW                | -                 | -                 | -                 | -                    |
| Efficiency at rated thermal power**                               | <b>ηnom</b>                                 | %                 | 84                | 87                | 86                | 86                   |
| Efficiency with thermal power at partial load**                   | <b>ηpart</b>                                | %                 | -                 | -                 | -                 | -                    |
| Consumption at rated power**                                      | -   | Kg/h              | 1.6               | 2.1               | 2.7               | 2.9                  |
| Consumption at reduced power**                                    | -   | Kg/h              | -                 | -                 | -                 | -                    |
| Tank capacity   | -   | Kg                | -                 | -                 | -                 | -                    |
| Seasonal efficiency at rated thermal power                        | <b>ηS</b>                                   | %                 | 74                | 77                | 76                | 76                   |
| Energy Efficiency Index   | <b>EEl</b>                                  | -                 | 112               | 116               | 115               | 115                  |
| CO emissions at 13% O <sub>2</sub> at rated power**               | <b>CO<sub>nom</sub> (13%O<sub>2</sub>)</b>  | mg/m <sup>3</sup> | 348               | 228               | 150               | 160                  |
| CO emissions at 13% O <sub>2</sub> at partial load**              | <b>CO<sub>part</sub> (13%O<sub>2</sub>)</b> | mg/m <sup>3</sup> | -                 | -                 | -                 | -                    |
| NO <sub>x</sub> emissions at 13% O <sub>2</sub> at rated power**  | <b>NO<sub>xnom</sub></b>                    | mg/m <sup>3</sup> | 77                | 69                | 68                | 64                   |
| NO <sub>x</sub> emissions at 13% O <sub>2</sub> at partial load** | <b>NO<sub>xpart</sub></b>                   | mg/m <sup>3</sup> | -                 | -                 | -                 | -                    |
| OGC emissions at 13% O <sub>2</sub> at rated power**              | <b>OGC<sub>nom</sub></b>                    | mg/m <sup>3</sup> | 80                | 67                | 34                | 22                   |
| OGC emissions at 13% O <sub>2</sub> at partial load**             | <b>OGC<sub>part</sub></b>                   | mg/m <sup>3</sup> | -                 | -                 | -                 | -                    |
| Particulate emissions at 13% O <sub>2</sub> at rated power**      | <b>PM<sub>nom</sub> (13%O<sub>2</sub>)</b>  | mg/m <sup>3</sup> | 18                | 17                | 15                | 9                    |
| Particulate emissions at 13% O <sub>2</sub> at partial load**     | <b>PM<sub>part</sub> (13%O<sub>2</sub>)</b> | mg/m <sup>3</sup> | -                 | -                 | -                 | -                    |
| Minimum flue outlet draught at rated power                        | <b>p<sub>nom</sub></b>                      | Pa                | 12                | 12                | 12                | 12                   |
| Minimum flue outlet draught at partial load                       | <b>p<sub>part</sub></b>                     | Pa                | 12                | 12                | 12                | 12                   |
| Maximum allowable working pressure of the water                   | <b>p<sub>W</sub></b>                        | bar               | -                 | -                 | -                 | -                    |
| Water content of the appliance                                    |   | l                 | -                 | -                 | -                 | -                    |
| Minimum safety distances from combustible material                | <b>d<sub>R</sub></b>                        | mm                | 200               | 200               | 200               | 200                  |
|   | <b>d<sub>S</sub></b>                        | mm                | 200               | 200               | 200               | 200                  |
|   | <b>d<sub>C</sub></b>                        | mm                | 750               | 750               | 750               | 750                  |
|   | <b>d<sub>P</sub></b>                        | mm                | 2000              | 200               | 2000              | 2000                 |
|   | <b>d<sub>F</sub></b>                        | mm                | 1500              | 1500              | 1500              | 1500                 |
|   | <b>d<sub>L</sub></b>                        | mm                | 1500              | 1500              | 1500              | 1500                 |
|   | <b>d<sub>B</sub></b>                        | mm                | 100               | 100               | 100               | 100                  |
| Minimum distances from non-combustible walls                      | <b>d<sub>non</sub></b>                      | mm                | 50                | 50                | 50                | 50                   |
| Electric power consumption in standby mode                        | <b>e<sub>ISB</sub></b>                      | kW                | -                 | -                 | -                 | -                    |
| Electric power consumption at rated power                         | <b>e<sub>lmax</sub></b>                     | kW                | -                 | -                 | -                 | -                    |
| Electric power consumption at reduced power                       | <b>e<sub>lmin</sub></b>                     | kW                | -                 | -                 | -                 | -                    |
| Power supply voltage, frequency                                   | <b>E, f</b>                                 | V, Hz             | -                 | -                 | -                 | -                    |
| Maximum electrical power consumption                              | <b>V<sub>max</sub></b>                      | W                 | -                 | -                 | -                 | -                    |
| Exhaust gas temperature at rated power**                          | <b>T<sub>snom</sub></b>                     | °C                | 201               | 203               | 240               | 253                  |
| Exhaust gas temperature at partial load**                         | <b>T<sub>spart</sub></b>                    | °C                | -                 | -                 | -                 | -                    |
| Chimney designation   | <b>T<sub>class</sub></b>                    | -                 | T400G             | T400G             | T400G             | T400G                |
| Exhaust gas flow rate at rated power**                            | <b>φ<sub>f,g nom</sub></b>                  | g/s               | 5.4               | 5.2               | 6                 | 6.4                  |
| Exhaust gas flow rate at partial load**                           | <b>φ<sub>f,g part</sub></b>                 | g/s               | -                 | -                 | -                 | -                    |
| Continuous operation (CON) or intermittent operation (INT)        | <b>CON or INT</b>                           | -                 | INT               | INT               | INT               | INT                  |
| Exhaust gas outlet diameter                                       | <b>d<sub>out</sub></b>                      | mm                | 130               | 130               | 130               | 130                  |
| Type of appliance   | <b>TYPE</b>                                 | -                 | TYPE B            | TYPE B            | TYPE B            | TYPE B               |
| Air tightness leakage   | <b>V<sub>h</sub></b>                        | m <sup>3</sup> /h | -                 | -                 | -                 | -                    |
| Depth, height, width  | <b>L, H, W</b>                              | mm                | 456, 1100,<br>698 | 456, 1100,<br>698 | 456, 1100,<br>698 | 456, 1100,<br>698    |
| Empty weight  | <b>m</b>                                    | Kg                | 192               | 192               | 192               | 192                  |
| Maximum supported weight of the flue outlet                       | <b>m<sub>chin</sub></b>                     | Kg                | 0                 | 0                 | 0                 | 0                    |
| Heatable volume*  |   | m <sup>3</sup>    | 154               | 213               | 267               | 286                  |
| Firebox feed opening dimensions (mm) (LxH)                        |   |                   | 557x302           |                   |                   |                      |
| Firebox dimensions (mm) (LxHxD)                                   |   |                   | 557x271x342       |                   |                   |                      |

|   | PARAMETER                                   | UNIT              | FULLMOON<br>6     | FULLMOON<br>8     | FULLMOON<br>10    | FULLMOON<br>EVO6 11 |
|---|---|-------------------|-------------------|-------------------|-------------------|---------------------|
| Thermal power at firebox**                                    | <b>P<sub>foc</sub></b>                      | kW                | 6.8               | 9                 | 11.5              | 12.5                |
| Rated thermal power**   | <b>P<sub>nom</sub></b>                      | kW                | 5.7               | 7.9               | 9.9               | 10.6                |
| Thermal power output to the room**                            | <b>PSH<sub>nom</sub></b>                    | kW                | 5.7               | 7.9               | 9.9               | 10.6                |
| Thermal power output to the water**                           | <b>PW<sub>nom</sub></b>                     | kW                | -                 | -                 | -                 | -                   |
| Thermal power at partial load**                               | <b>P<sub>part</sub></b>                     | kW                | -                 | -                 | -                 | -                   |
| Thermal power output to the room at partial load**            | <b>PSH<sub>part</sub></b>                   | kW                | -                 | -                 | -                 | -                   |
| Thermal power output to the water at partial load**           | <b>PW<sub>part</sub></b>                    | kW                | -                 | -                 | -                 | -                   |
| Efficiency at rated thermal power**                           | <b>η<sub>nom</sub></b>                      | %                 | 84                | 87                | 86                | 86                  |
| Efficiency with thermal power at partial load**               | <b>η<sub>part</sub></b>                     | %                 | -                 | -                 | -                 | -                   |
| Consumption at rated power**                                  | -   | Kg/h              | 1.6               | 2.1               | 2.7               | 2.9                 |
| Consumption at reduced power**                                | -   | Kg/h              | -                 | -                 | -                 | -                   |
| Tank capacity   | -   | Kg                | -                 | -                 | -                 | -                   |
| Seasonal efficiency at rated thermal power                    | <b>η<sub>S</sub></b>                        | %                 | 74                | 77                | 76                | 76                  |
| Energy Efficiency Index                                       | <b>EEL</b>                                  | -                 | 112               | 116               | 115               | 115                 |
| CO emissions at 13% O <sub>2</sub> at rated power**           | <b>CO<sub>nom</sub> (13%O<sub>2</sub>)</b>  | mg/m <sup>3</sup> | 348               | 228               | 150               | 160                 |
| CO emissions at 13% O <sub>2</sub> at partial load**          | <b>CO<sub>part</sub> (13%O<sub>2</sub>)</b> | mg/m <sup>3</sup> | -                 | -                 | -                 | -                   |
| NOx emissions at 13% O <sub>2</sub> at rated power**          | <b>NO<sub>xnom</sub></b>                    | mg/m <sup>3</sup> | 77                | 69                | 68                | 64                  |
| NOx emissions at 13% O <sub>2</sub> at partial load**         | <b>NO<sub>xpart</sub></b>                   | mg/m <sup>3</sup> | -                 | -                 | -                 | -                   |
| OGC emissions at 13% O <sub>2</sub> at rated power**          | <b>OGC<sub>nom</sub></b>                    | mg/m <sup>3</sup> | 80                | 67                | 34                | 22                  |
| OGC emissions at 13% O <sub>2</sub> at partial load**         | <b>OGC<sub>part</sub></b>                   | mg/m <sup>3</sup> | -                 | -                 | -                 | -                   |
| Particulate emissions at 13% O <sub>2</sub> at rated power**  | <b>PM<sub>nom</sub> (13%O<sub>2</sub>)</b>  | mg/m <sup>3</sup> | 18                | 17                | 15                | 9                   |
| Particulate emissions at 13% O <sub>2</sub> at partial load** | <b>PM<sub>part</sub> (13%O<sub>2</sub>)</b> | mg/m <sup>3</sup> | -                 | -                 | -                 | -                   |
| Minimum flue outlet draught at rated power                    | <b>p<sub>nom</sub></b>                      | Pa                | 12                | 12                | 12                | 12                  |
| Minimum flue outlet draught at partial load                   | <b>p<sub>part</sub></b>                     | Pa                | 12                | 12                | 12                | 12                  |
| Maximum allowable working pressure of the water               | <b>p<sub>W</sub></b>                        | bar               | -                 | -                 | -                 | -                   |
| Water content of the appliance                                |   | l                 | -                 | -                 | -                 | -                   |
| Minimum safety distances from combustible material            | <b>d<sub>R</sub></b>                        | mm                | 200               | 200               | 200               | 200                 |
|   | <b>d<sub>S</sub></b>                        | mm                | 200               | 200               | 200               | 200                 |
|   | <b>d<sub>C</sub></b>                        | mm                | 750               | 750               | 750               | 750                 |
|   | <b>d<sub>P</sub></b>                        | mm                | 2000              | 200               | 2000              | 2000                |
|   | <b>d<sub>F</sub></b>                        | mm                | 1500              | 1500              | 1500              | 1500                |
|   | <b>d<sub>L</sub></b>                        | mm                | 1500              | 1500              | 1500              | 1500                |
|   | <b>d<sub>B</sub></b>                        | mm                | 100               | 100               | 100               | 100                 |
| Minimum distances from non-combustible walls                  | <b>d<sub>non</sub></b>                      | mm                | 50                | 50                | 50                | 50                  |
| Electric power consumption in standby mode                    | <b>e<sub>LSB</sub></b>                      | kW                | -                 | -                 | -                 | -                   |
| Electric power consumption at rated power                     | <b>e<sub>lmax</sub></b>                     | kW                | -                 | -                 | -                 | -                   |
| Electric power consumption at reduced power                   | <b>e<sub>lmin</sub></b>                     | kW                | -                 | -                 | -                 | -                   |
| Power supply voltage, frequency                               | <b>E, f</b>                                 | V, Hz             | -                 | -                 | -                 | -                   |
| Maximum electrical power consumption                          | <b>V<sub>max</sub></b>                      | W                 | -                 | -                 | -                 | -                   |
| Exhaust gas temperature at rated power**                      | <b>T<sub>snom</sub></b>                     | °C                | 201               | 203               | 240               | 253                 |
| Exhaust gas temperature at partial load**                     | <b>T<sub>spart</sub></b>                    | °C                | -                 | -                 | -                 | -                   |
| Chimney designation   | <b>T<sub>class</sub></b>                    | -                 | T400G             | T400G             | T400G             | T400G               |
| Exhaust gas flow rate at rated power**                        | <b>φ<sub>f,g nom</sub></b>                  | g/s               | 5.4               | 5.2               | 6                 | 6.4                 |
| Exhaust gas flow rate at partial load**                       | <b>φ<sub>f,g part</sub></b>                 | g/s               | -                 | -                 | -                 | -                   |
| Continuous operation (CON) or intermittent operation (INT)    | <b>CON or INT</b>                           | -                 | INT               | INT               | INT               | INT                 |
| Exhaust gas outlet diameter                                   | <b>d<sub>out</sub></b>                      | mm                | 130               | 130               | 130               | 130                 |
| Type of appliance   | <b>TYPE</b>                                 | -                 | TYPE B            | TYPE B            | TYPE B            | TYPE B              |
| Air tightness leakage   | <b>V<sub>h</sub></b>                        | m <sup>3</sup> /h | -                 | -                 | -                 | -                   |
| Depth, height, width  | <b>L, H, W</b>                              | mm                | 483, 1019,<br>785 | 483, 1019,<br>785 | 483, 1019,<br>785 | 483, 1019,<br>785   |
| Empty weight  | <b>m</b>                                    | Kg                | 225               | 225               | 225               | 225                 |
| Maximum supported weight of the flue outlet                   | <b>m<sub>chin</sub></b>                     | Kg                | 0                 | 0                 | 0                 | 0                   |
| Heatable volume*  |   | m <sup>3</sup>    | 154               | 213               | 267               | 286                 |
| Firebox feed opening dimensions (mm) (LxH)                    |   |                   | 652x302           |                   |                   |                     |
| Firebox dimensions (mm) (LxHxD)                               |   |                   | 652x271x342       |                   |                   |                     |

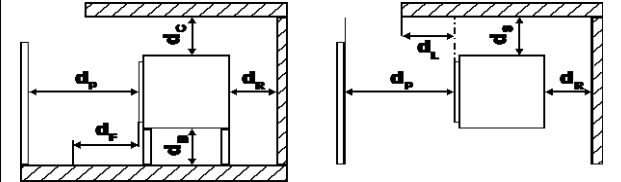

*Installation, use and maintenance guide*  
**SKYLINE – PANORAMA – FULLMOON – MOONLIGHT – TRILOGIE**
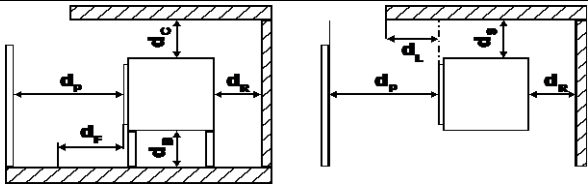
|   | PARAMETER                                   | UNIT              | TRILOGIE 6     | TRILOGIE 8     | TRILOGIE 10    | TRILOGIE EVO6 11 |
|---|---|-------------------|----------------|----------------|----------------|------------------|
| Thermal power at firebox**  | <b>Pfoc</b>                                 | kW                | 6.8            | 9              | 11.5           | 12.5             |
| Rated thermal power**   | <b>Pnom</b>                                 | kW                | 5.7            | 7.9            | 9.9            | 10.6             |
| Thermal power output to the room**  | <b>PSHnom</b>                               | kW                | 5.7            | 7.9            | 9.9            | 10.6             |
| Thermal power output to the water**   | <b>PWnom</b>                                | kW                | -              | -              | -              | -                |
| Thermal power at partial load**   | <b>Part</b>                                 | kW                | -              | -              | -              | -                |
| Thermal power output to the room at partial load**                                  | <b>PSHpart</b>                              | kW                | -              | -              | -              | -                |
| Thermal power output to the water at partial load**                                 | <b>PWpart</b>                               | kW                | -              | -              | -              | -                |
| Efficiency at rated thermal power**   | <b>ηnom</b>                                 | %                 | 84             | 87             | 86             | 86               |
| Efficiency with thermal power at partial load**                                     | <b>ηpart</b>                                | %                 | -              | -              | -              | -                |
| Consumption at rated power**  | -   | Kg/h              | 1.6            | 2.1            | 2.7            | 2.9              |
| Consumption at reduced power**  | -   | Kg/h              | -              | -              | -              | -                |
| Tank capacity   | -   | Kg                | -              | -              | -              | -                |
| Seasonal efficiency at rated thermal power  | <b>ηS</b>                                   | %                 | 74             | 77             | 76             | 76               |
| Energy Efficiency Index   | <b>EEl</b>                                  | -                 | 112            | 116            | 115            | 115              |
| CO emissions at 13% O <sub>2</sub> at rated power**                                 | <b>CO<sub>nom</sub> (13%O<sub>2</sub>)</b>  | mg/m <sup>3</sup> | 348            | 228            | 150            | 160              |
| CO emissions at 13% O <sub>2</sub> at partial load**                                | <b>CO<sub>part</sub> (13%O<sub>2</sub>)</b> | mg/m <sup>3</sup> | -              | -              | -              | -                |
| NO <sub>x</sub> emissions at 13% O <sub>2</sub> at rated power**                    | <b>NO<sub>xnom</sub></b>                    | mg/m <sup>3</sup> | 77             | 69             | 68             | 64               |
| NO <sub>x</sub> emissions at 13% O <sub>2</sub> at partial load**                   | <b>NO<sub>xpart</sub></b>                   | mg/m <sup>3</sup> | -              | -              | -              | -                |
| OGC emissions at 13% O <sub>2</sub> at rated power**                                | <b>OGC<sub>nom</sub></b>                    | mg/m <sup>3</sup> | 80             | 67             | 34             | 22               |
| OGC emissions at 13% O <sub>2</sub> at partial load**                               | <b>OGC<sub>part</sub></b>                   | mg/m <sup>3</sup> | -              | -              | -              | -                |
| Particulate emissions at 13% O <sub>2</sub> at rated power**                        | <b>PM<sub>nom</sub> (13%O<sub>2</sub>)</b>  | mg/m <sup>3</sup> | 18             | 17             | 15             | 9                |
| Particulate emissions at 13% O <sub>2</sub> at partial load**                       | <b>PM<sub>part</sub> (13%O<sub>2</sub>)</b> | mg/m <sup>3</sup> | -              | -              | -              | -                |
| Minimum flue outlet draught at rated power  | <b>p<sub>nom</sub></b>                      | Pa                | 12             | 12             | 12             | 12               |
| Minimum flue outlet draught at partial load   | <b>p<sub>part</sub></b>                     | Pa                | 12             | 12             | 12             | 12               |
| Maximum allowable working pressure of the water                                     | <b>p<sub>W</sub></b>                        | bar               | -              | -              | -              | -                |
| Water content of the appliance  |   | l                 | -              | -              | -              | -                |
| Minimum safety distances from combustible material                                  | <b>d<sub>R</sub></b>                        | mm                | 200            | 200            | 200            | 200              |
|  | <b>d<sub>S</sub></b>                        | mm                | 200            | 200            | 200            | 200              |
|   | <b>d<sub>C</sub></b>                        | mm                | 750            | 750            | 750            | 750              |
|   | <b>d<sub>P</sub></b>                        | mm                | 2000           | 200            | 2000           | 2000             |
|   | <b>d<sub>F</sub></b>                        | mm                | 1500           | 1500           | 1500           | 1500             |
|   | <b>d<sub>L</sub></b>                        | mm                | 1500           | 1500           | 1500           | 1500             |
|   | <b>d<sub>B</sub></b>                        | mm                | 100            | 100            | 100            | 100              |
| Minimum distances from non-combustible walls  | <b>d<sub>non</sub></b>                      | mm                | 50             | 50             | 50             | 50               |
| Electric power consumption in standby mode  | <b>e<sub>ISB</sub></b>                      | kW                | -              | -              | -              | -                |
| Electric power consumption at rated power   | <b>e<sub>lmax</sub></b>                     | kW                | -              | -              | -              | -                |
| Electric power consumption at reduced power   | <b>e<sub>lmin</sub></b>                     | kW                | -              | -              | -              | -                |
| Power supply voltage, frequency   | <b>E, f</b>                                 | V, Hz             | -              | -              | -              | -                |
| Maximum electrical power consumption  | <b>V<sub>max</sub></b>                      | W                 | -              | -              | -              | -                |
| Exhaust gas temperature at rated power**  | <b>T<sub>snom</sub></b>                     | °C                | 201            | 203            | 240            | 253              |
| Exhaust gas temperature at partial load**   | <b>T<sub>spart</sub></b>                    | °C                | -              | -              | -              | -                |
| Chimney designation   | <b>T<sub>class</sub></b>                    | -                 | T400G          | T400G          | T400G          | T400G            |
| Exhaust gas flow rate at rated power**  | <b>φ<sub>f,g nom</sub></b>                  | g/s               | 5.4            | 5.2            | 6              | 6.4              |
| Exhaust gas flow rate at partial load**   | <b>φ<sub>f,g part</sub></b>                 | g/s               | -              | -              | -              | -                |
| Continuous operation (CON) or intermittent operation (INT)                          | <b>CON or INT</b>                           | -                 | INT            | INT            | INT            | INT              |
| Exhaust gas outlet diameter   | <b>d<sub>out</sub></b>                      | mm                | 130            | 130            | 130            | 130              |
| Type of appliance   | <b>TYPE</b>                                 | -                 | TYPE B         | TYPE B         | TYPE B         | TYPE B           |
| Air tightness leakage   | <b>V<sub>h</sub></b>                        | m <sup>3</sup> /h | -              | -              | -              | -                |
| Depth, height, width  | <b>L, H, W</b>                              | mm                | 495, 1528, 690 | 495, 1528, 690 | 495, 1528, 690 | 495, 1528, 690   |
| Empty weight  | <b>m</b>                                    | Kg                | 207            | 207            | 207            | 207              |
| Maximum supported weight of the flue outlet   | <b>m<sub>chin</sub></b>                     | Kg                | 0              | 0              | 0              | 0                |
| Heatable volume*  |   | m <sup>3</sup>    | 154            | 213            | 267            | 286              |
| Firebox feed opening dimensions (mm) (LxH)  |   |                   | 557x302        |                |                |                  |
| Firebox dimensions (mm) (LxHxD)   |   |                   | 557x271x342    |                |                |                  |

**SKYLINE – PANORAMA – FULLMOON – MOONLIGHT – TRILOGIE**


\* **IMPORTANT:** It is important to take into consideration the fact that the heatable volume is greatly influenced by the insulation of the house (energy class of the building) and by the position of the appliance in the planimetry of the house, therefore the indicated values may vary, even significantly.

\*\* **ATTENTION:** The indicated values were obtained using beechwood logs (2 logs) with thermal value less than 15,604 kJ/kg and moisture content less than 15%. The use of poorer quality firewood than that specified results in lower yield and lower efficiency, and produces more ash. Moreover the glass on the feed door will become dirtier sooner.


\*\*\* It is strictly prohibited to load a greater quantity of fuel than that specified in the table. The warranty will not cover damages caused by the prolonged exposure of the appliance to temperatures that are too high.

**2.1 DIMENSIONS**


**SKYLINE 490 8 - SKYLINE EVO6 490 9**

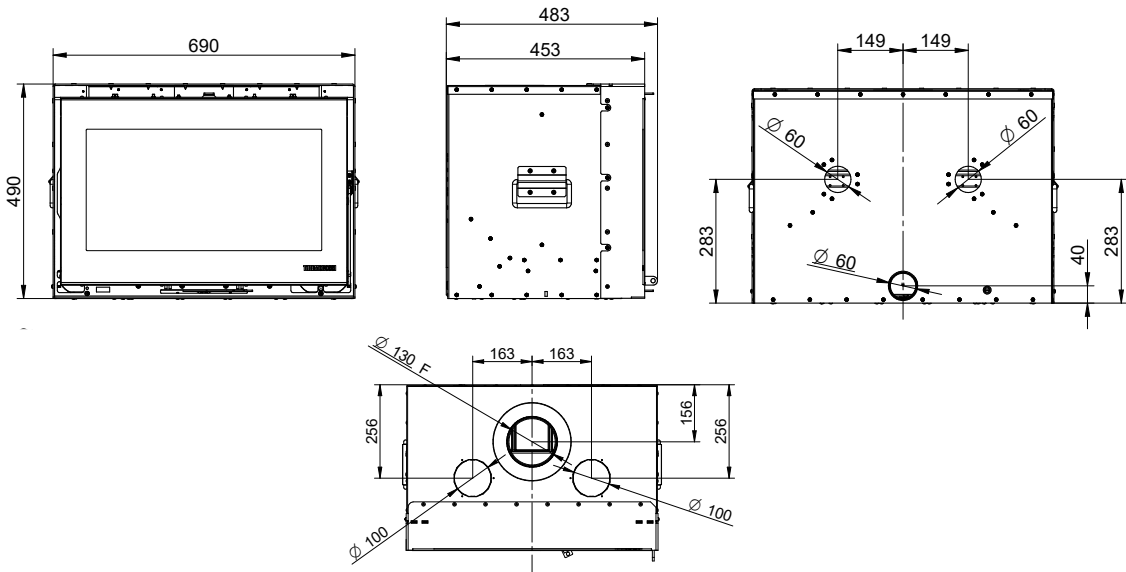


**with frame finish (optional)**

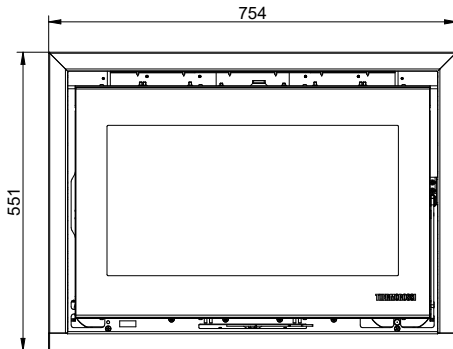


**with compensating profiles (optional)**

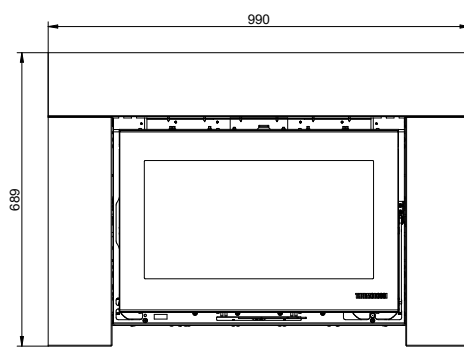


**with adjustable pedestal (optional)**

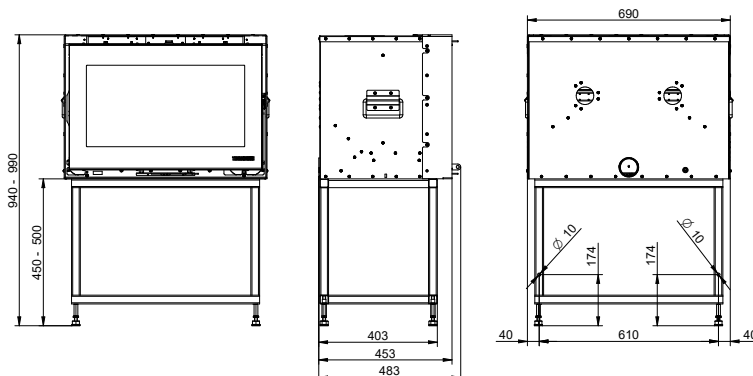

*Installation, use and maintenance guide*  
**SKYLINE – PANORAMA – FULLMOON – MOONLIGHT – TRILOGIE**  
**PANORAMA 490 8 – PANORAMA EVO6 490 9**

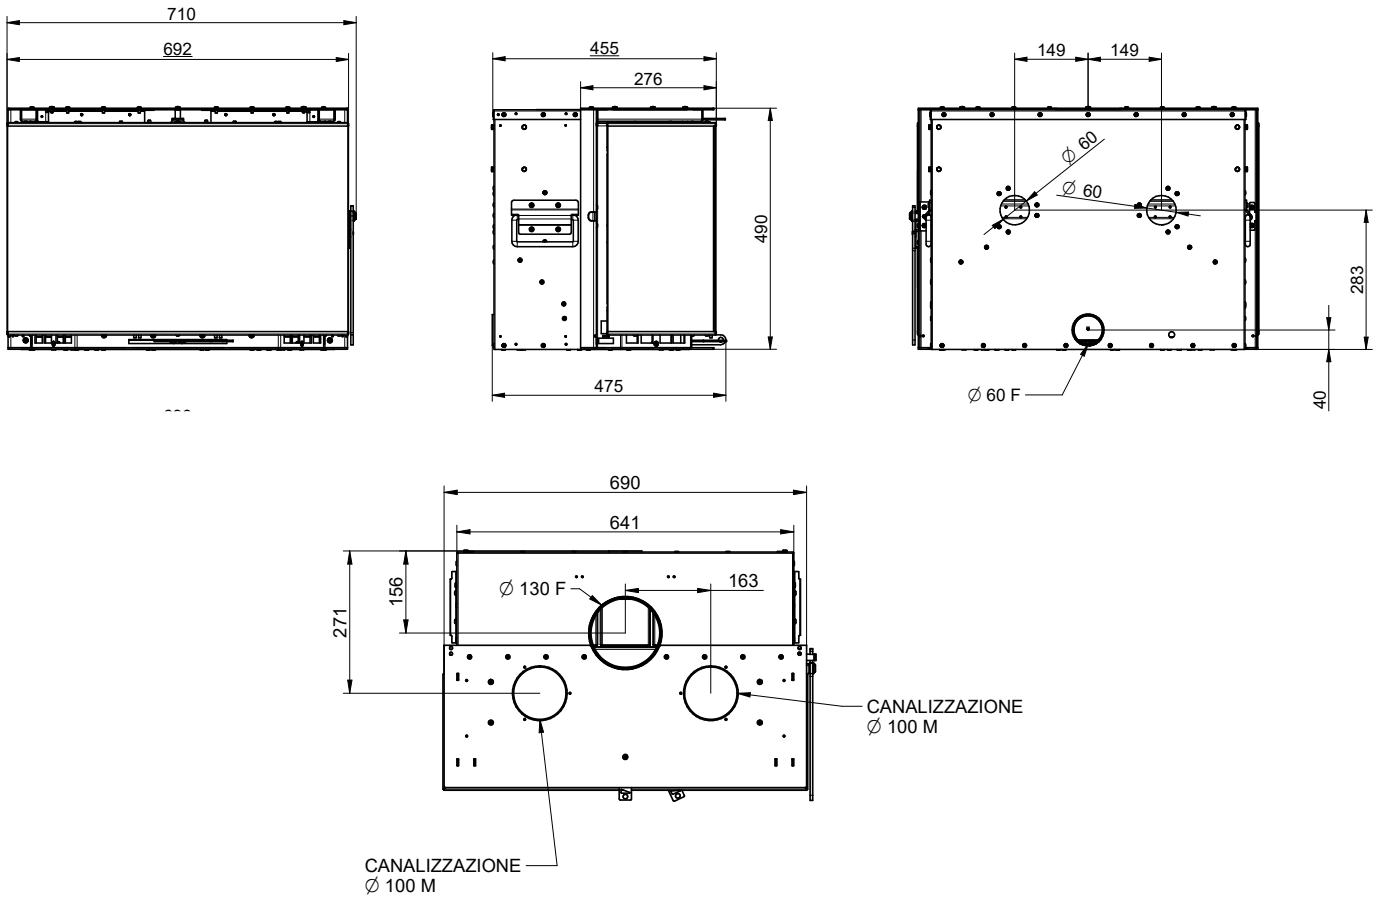


with adjustable pedestal (optional)

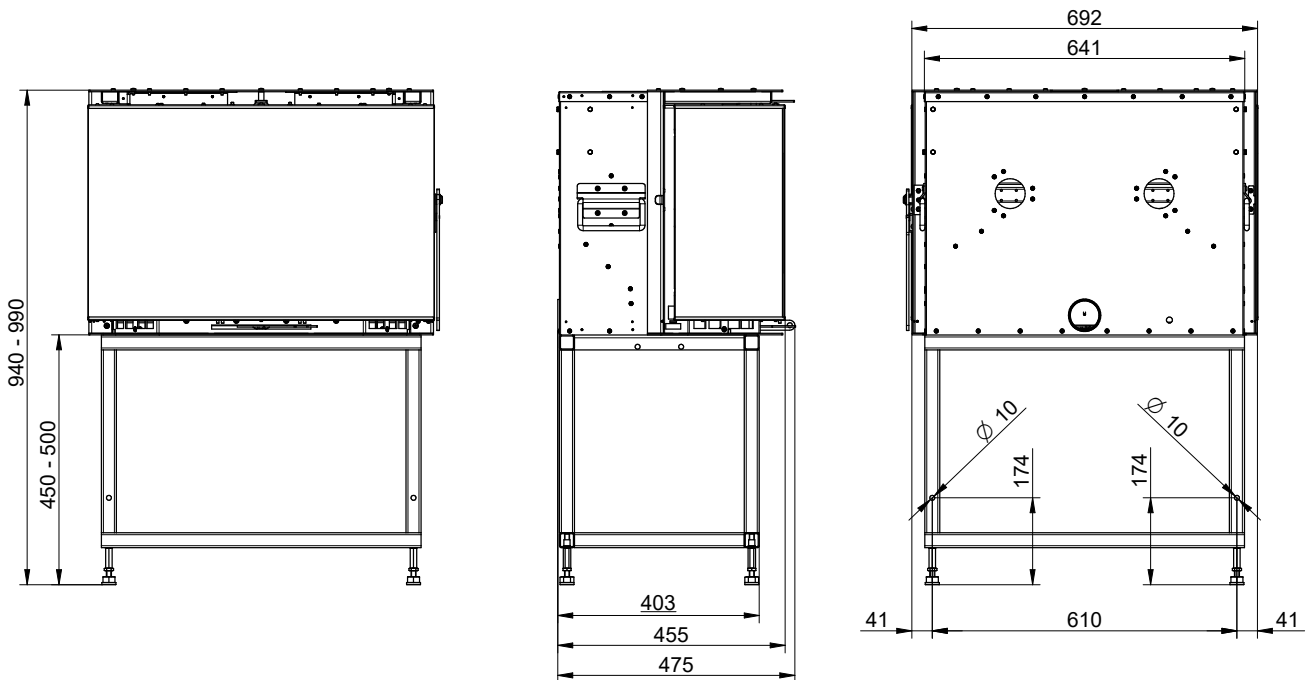



**SKYLINE – PANORAMA – FULLMOON – MOONLIGHT – TRILOGIE**

**SKYLINE 540 6 – SKYLINE 540 8 – SKYLINE 540 10 – SKYLINE EVO6 540 11**

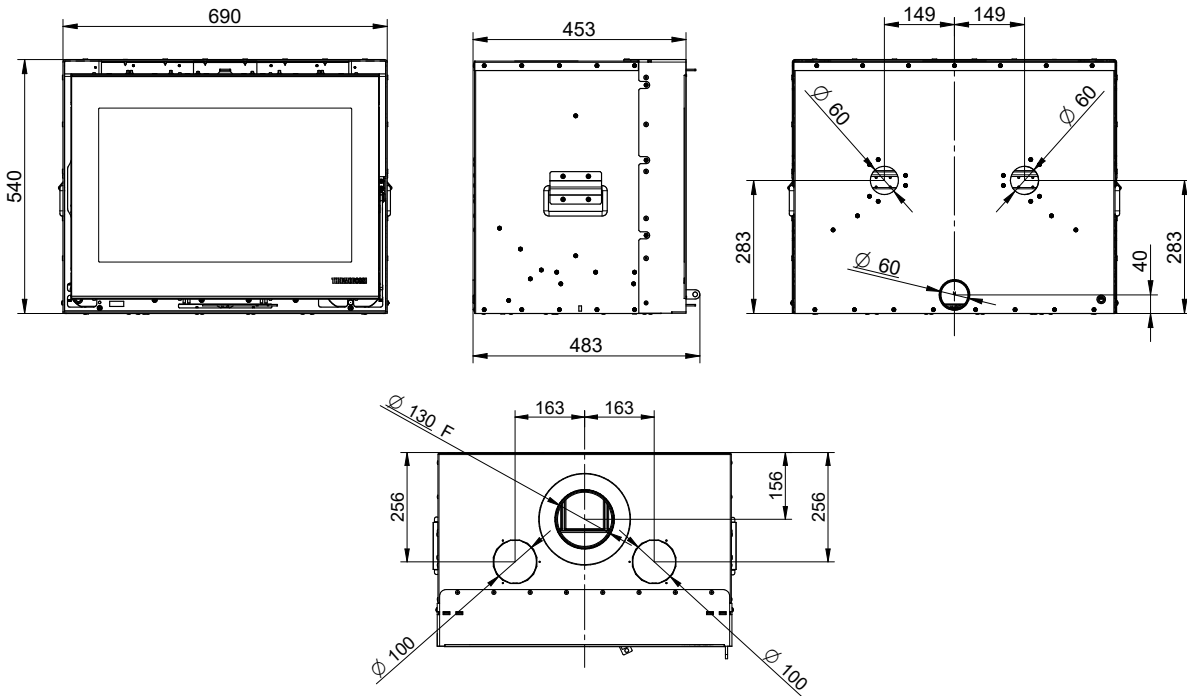


**with frame finish (optional)**

**with compensating profiles (optional)**

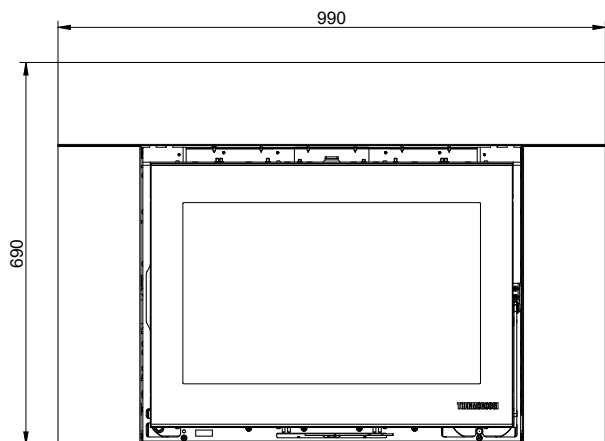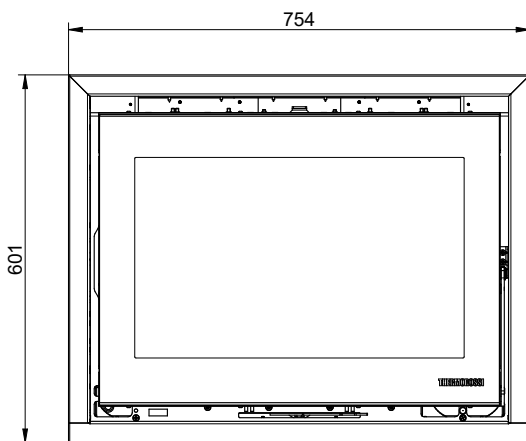


**with adjustable pedestal (optional)**

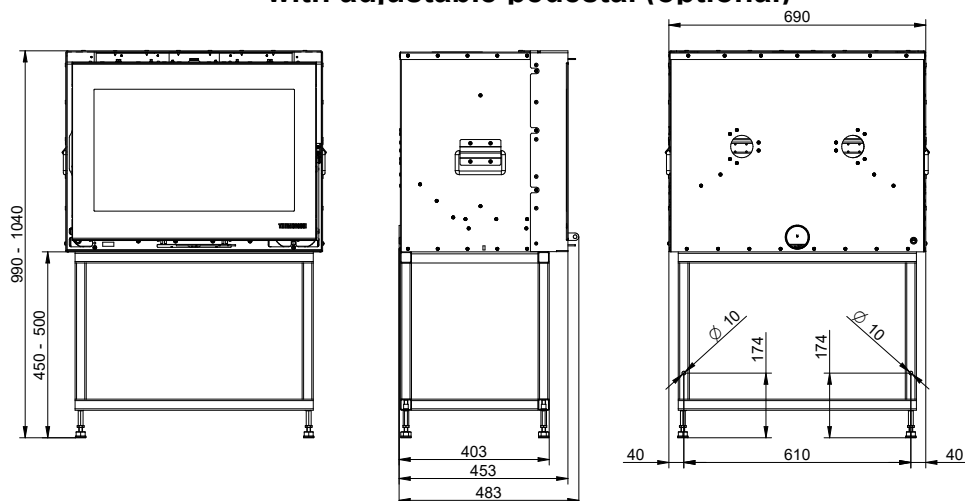



**SKYLINE – PANORAMA – FULLMOON – MOONLIGHT – TRILOGIE**

**SKYLINE 800 6 – SKYLINE 800 8 – SKYLINE 800 10 – SKYLINE EVO6 800 11**

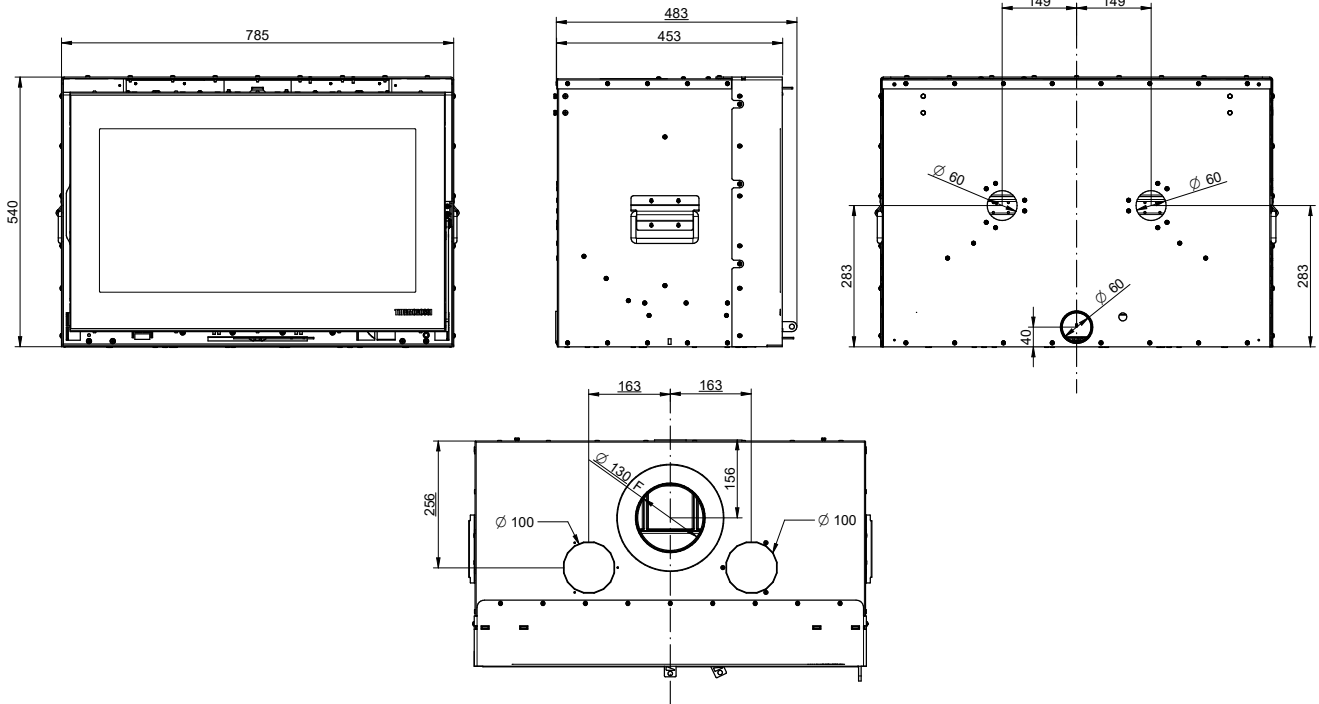


**with frame finish (optional)**


**with compensating profiles (optional)**

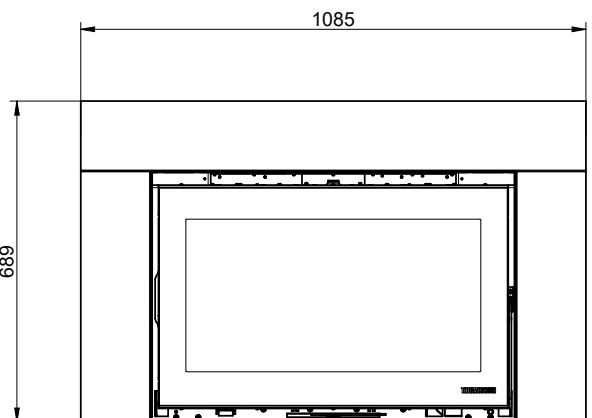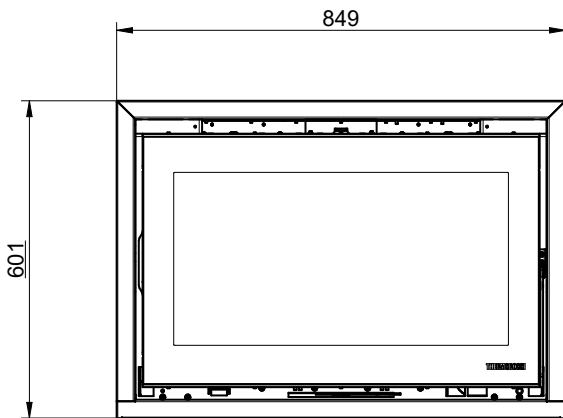

**with adjustable pedestal (optional)**


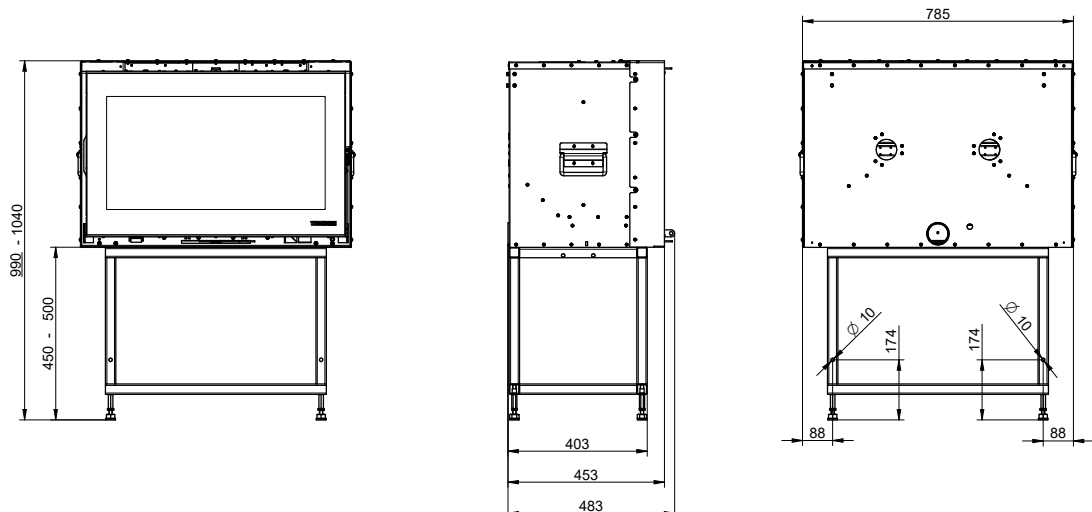


SKYLINE 1000 6 – SKYLINE 1000 8 – SKYLINE 1000 10 – SKYLINE EVO6 1000 11

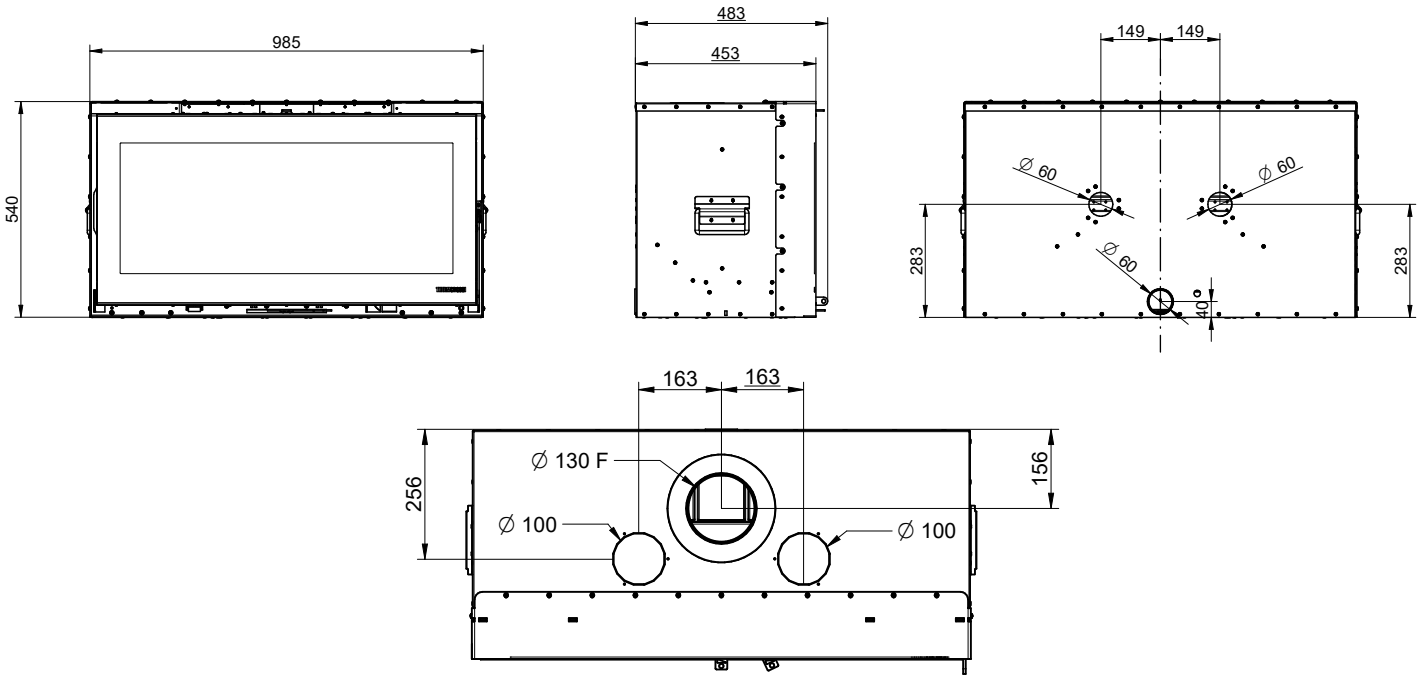


with frame finish (optional)



with compensating profiles (optional)

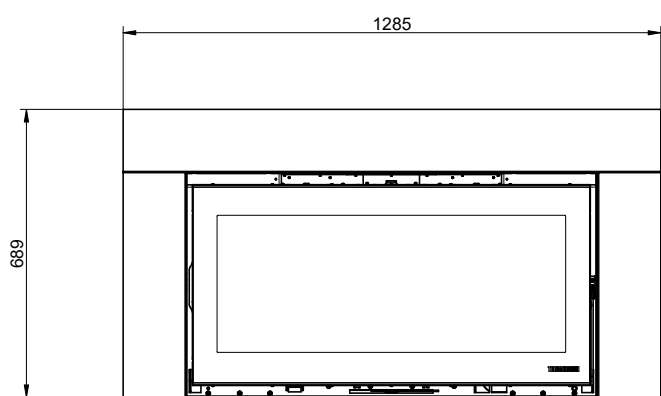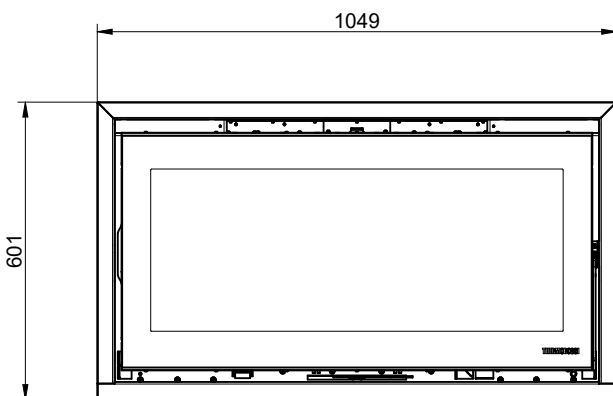


with adjustable pedestal (optional)

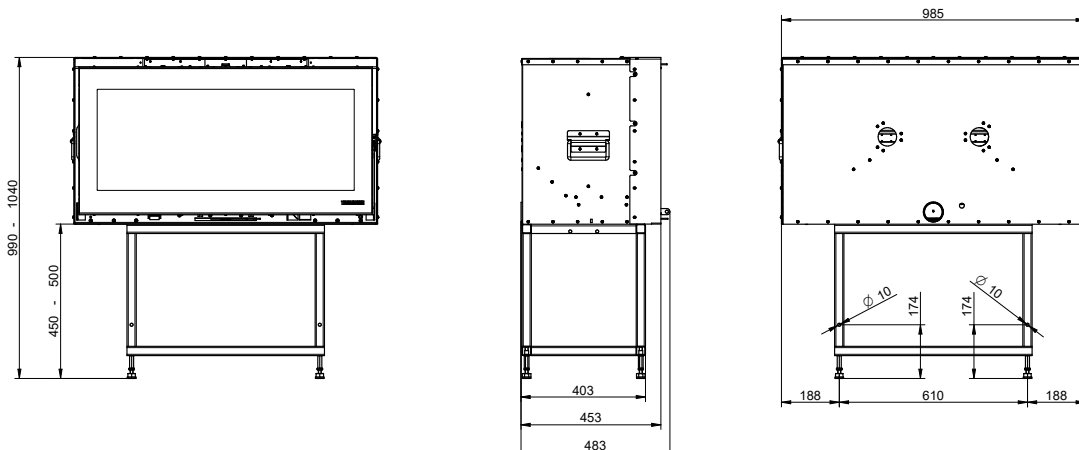

**PANORAMA 6 – PANORAMA 8 – PANORAMA 10 – PANORAMA EVO6 11**

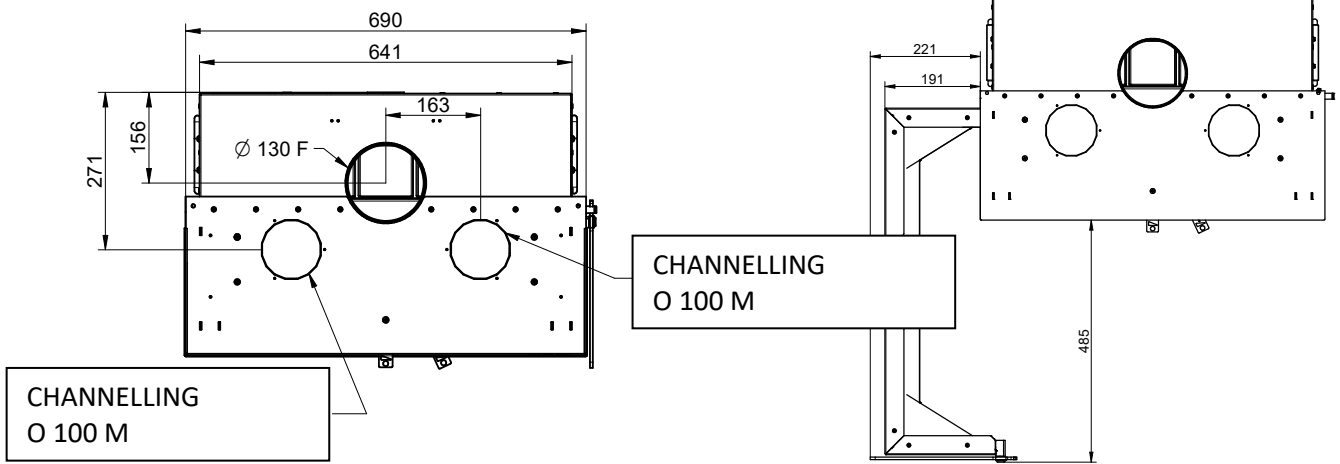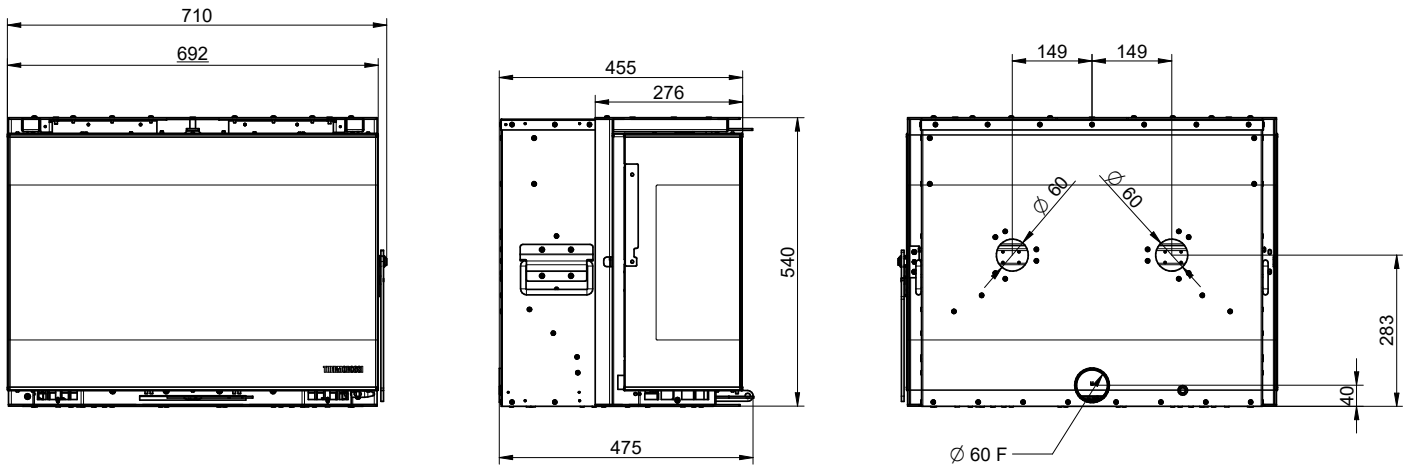


**with adjustable pedestal (optional)**

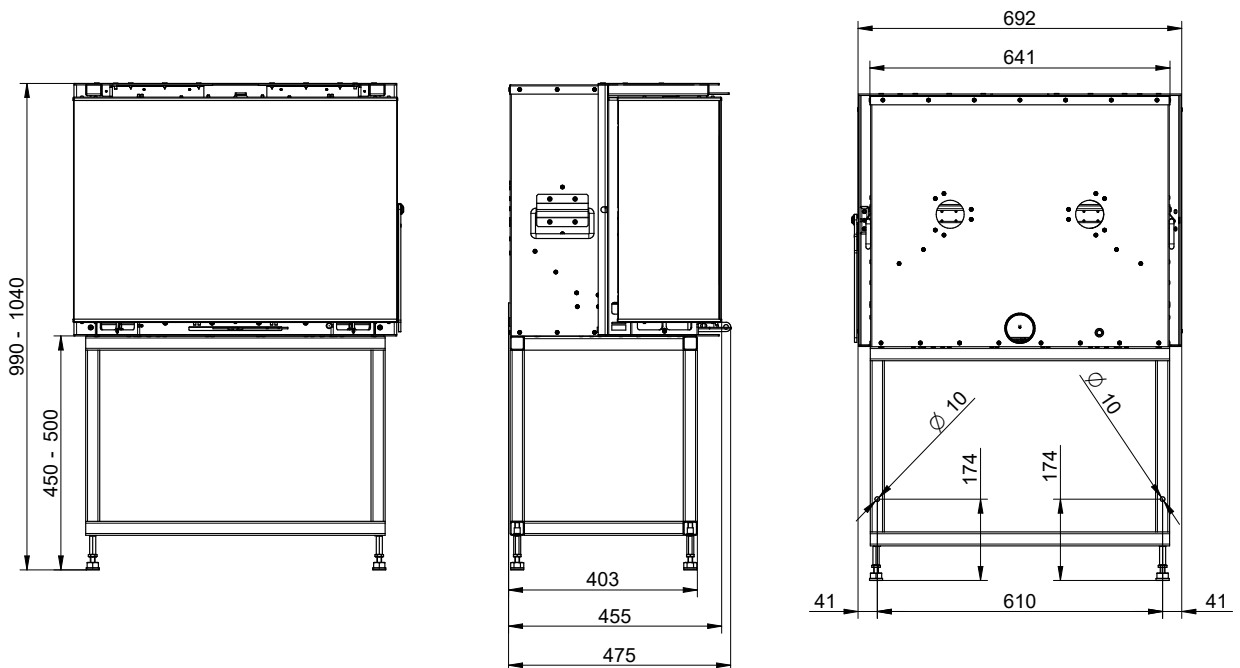


SKYLINE – PANORAMA – FULLMOON – MOONLIGHT – TRILOGIE


MOONLIGHT 6 – MOONLIGHT 8 – MOONLIGHT 10 – MOONLIGHT EVO6 11

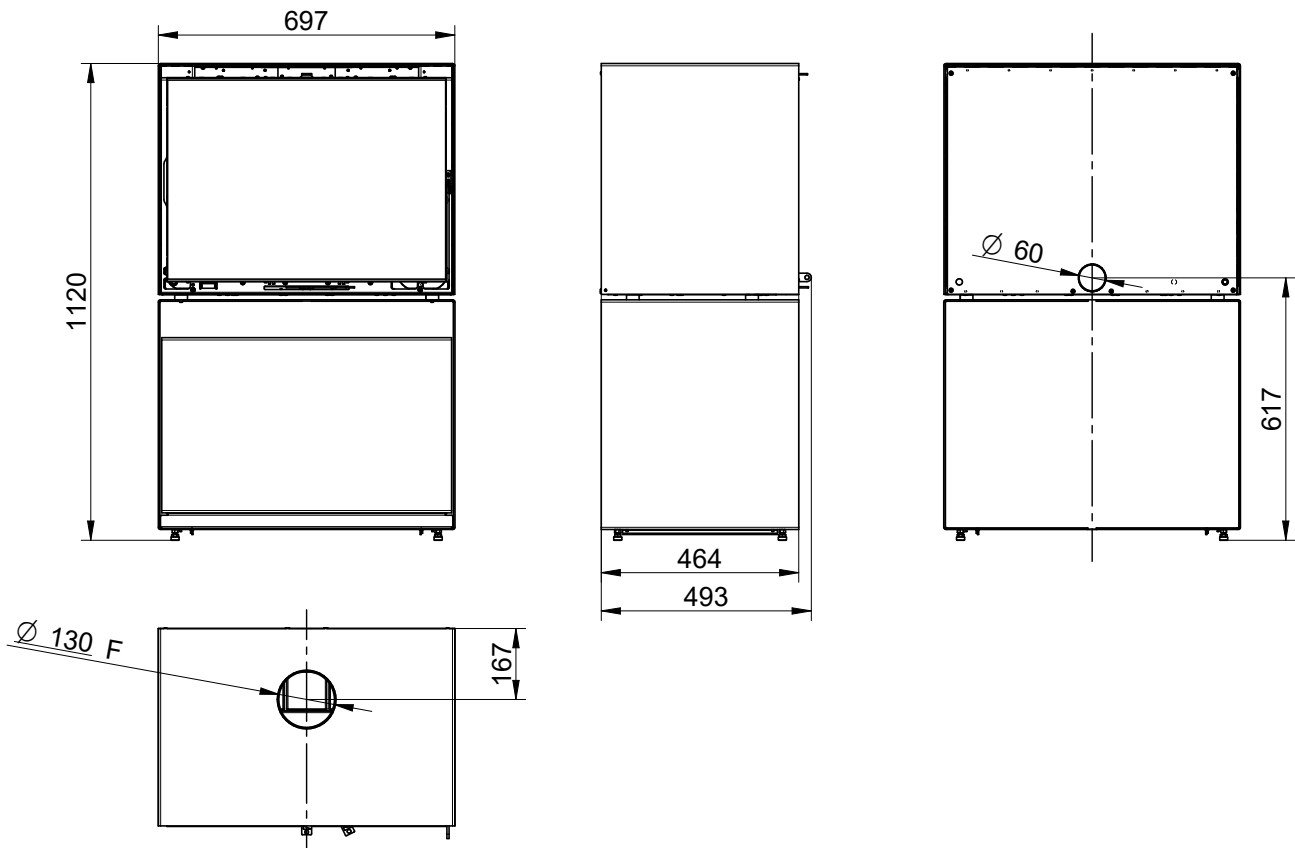

FULLMOON 6 – FULLMOON 8 – FULLMOON 10 – FULLMOON EVO6 11

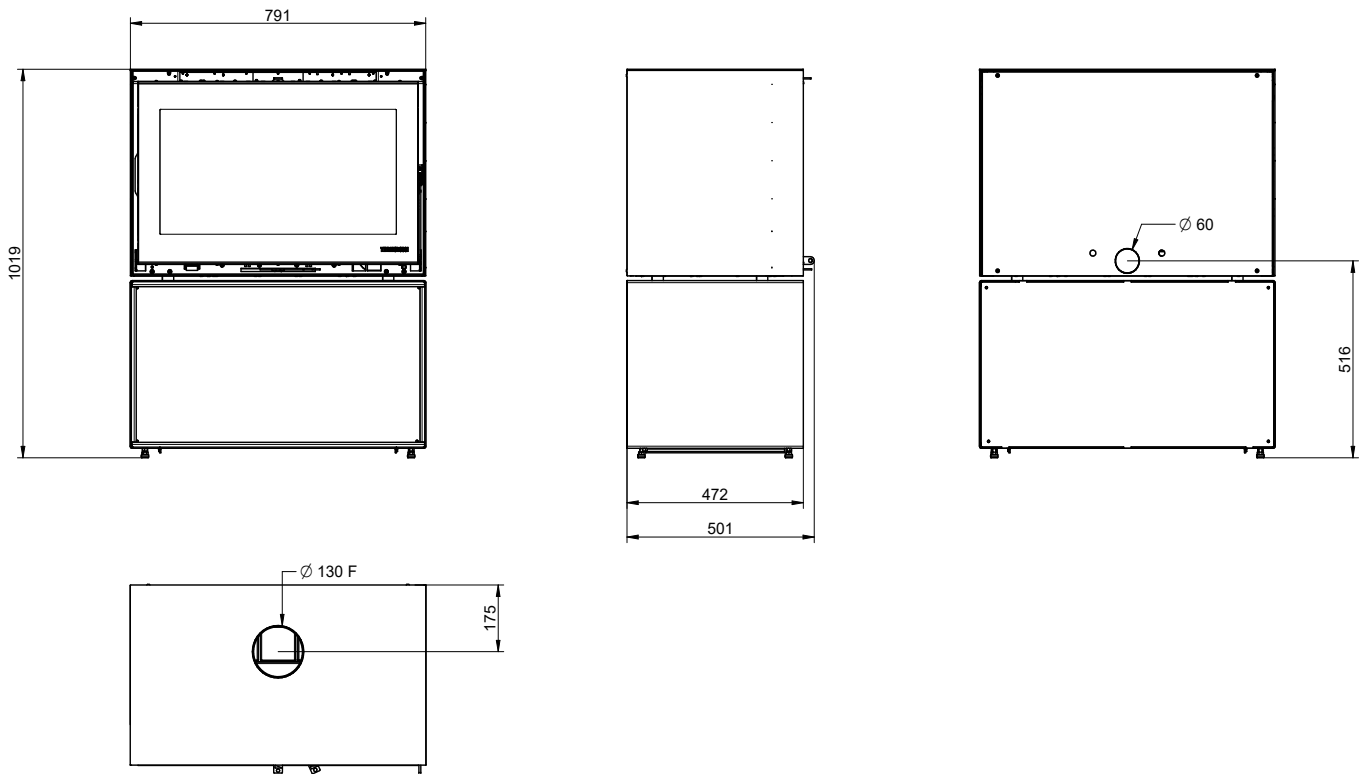

**TRILOGIE 6 – TRILOGIE 8 – TRILOGIE 10 – TRILOGIE EVO6 11**

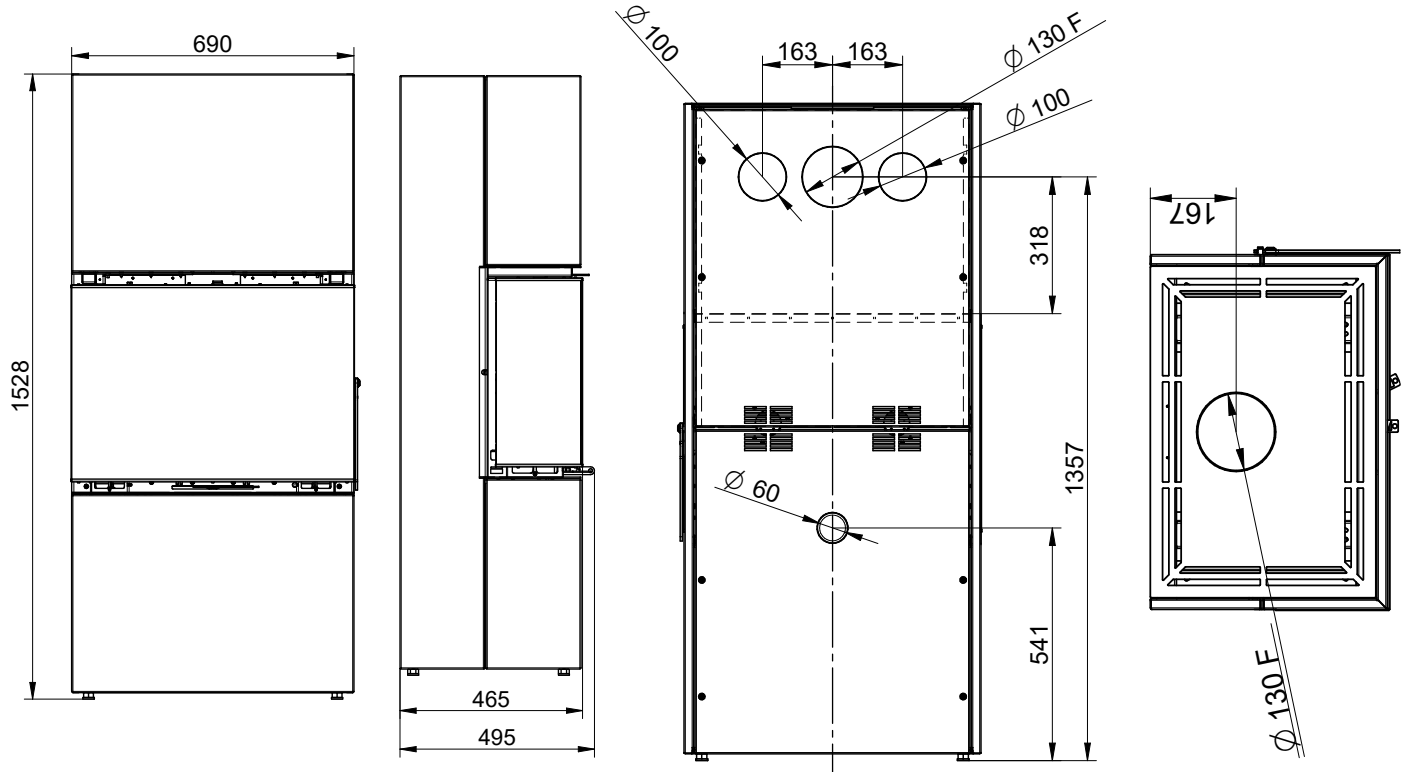

### **3 – GENERAL DESCRIPTION**

#### **3.1 THE FUEL**

The fuel for this appliance is ordinary wood billets with a moisture content between 10% and 20% and with a thermal value of 10,400 to 16,400 KJ/kg. We recommend using beech or common hornbeam. If using wood with a lower moisture content or with a higher thermal value, the heat produced by the stove will be greater.

The awareness and use of the right fuel are important aspects to be observed in order to ensure correct operation and long service life of the appliance. To this end we recommend using only dry, well-seasoned wood. We recommend against using wet wood or wood that has been seasoned for less than 18/20 months, as this could be the cause of malfunctions and the formation of tarry deposits that could permanently blacken the walls of the combustion chamber.

We recommend using logs with a maximum length of 330 mm (max. recommended section Ø 80 mm), and a maximum limit of 2-3 logs. Alternatively, a single 500-mm log can be used (max. recommended section Ø 80 mm).

#### **MAXIMUM PERMITTED FUEL FEED:**

| <b>Kg</b>   | <b>Model</b>                             |                     |                      |                  |                   |                  |                  |
|-------------|--|---------------------|----------------------|------------------|-------------------|------------------|------------------|
| <b>2.15</b> | SKYLINE 490 8 – PANORAMA 490 8           |                     |                      |                  |                   |                  |                  |
| <b>2.53</b> | SKYLINE EVO6 490 9 – PANORAMA EVO6 490 9 |                     |                      |                  |                   |                  |                  |
| <b>1.56</b> | SKYLINE 540 6                            | SKYLINE 800 6       | SKYLINE 1000 6       | PANORAMA 6       | MOONLIGHT 6       | FULLMOON 6       | TRILOGIE 6       |
| <b>2.07</b> | SKYLINE 540 8                            | SKYLINE 800 8       | SKYLINE 1000 8       | PANORAMA 8       | MOONLIGHT 8       | FULLMOON 8       | TRILOGIE 8       |
| <b>2.66</b> | SKYLINE 540 10                           | SKYLINE 800 10      | SKYLINE 1000 10      | PANORAMA 10      | MOONLIGHT 10      | FULLMOON 10      | TRILOGIE 10      |
| <b>2.89</b> | SKYLINE EVO6 540 11                      | SKYLINE EVO6 800 11 | SKYLINE EVO6 1000 11 | PANORAMA EVO6 11 | MOONLIGHT EVO6 11 | FULLMOON EVO6 11 | TRILOGIE EVO6 11 |




**THE FUEL FEED INTERVALS MUST NOT BE LESS THAN 1 HR.**

**LOADING A LARGER QUANTITY OF FUEL OR LOADING SEVERAL TIMES IN AN HOUR EXPOSES THE COMPONENTS OF THE APPLIANCE TO VERY HIGH TEMPERATURES. FOR THIS REASON THE WARRANTY WILL NOT COVER ANY DAMAGE CAUSED BY PROLONGED EXPOSURE OF THE APPLIANCE TO THESE TEMPERATURES.**



**The use of fuel that does not comply with the above specifications or the use of different substances or fuels will immediately void the appliance warranty. The appliance must not be used as an incinerator, and it is prohibited to use any liquid or gas fuel. Do not overload the stove with excessive quantities of fuel; adhere strictly to the maximum declared consumption.**


**3.2 MAIN COMPONENTS**

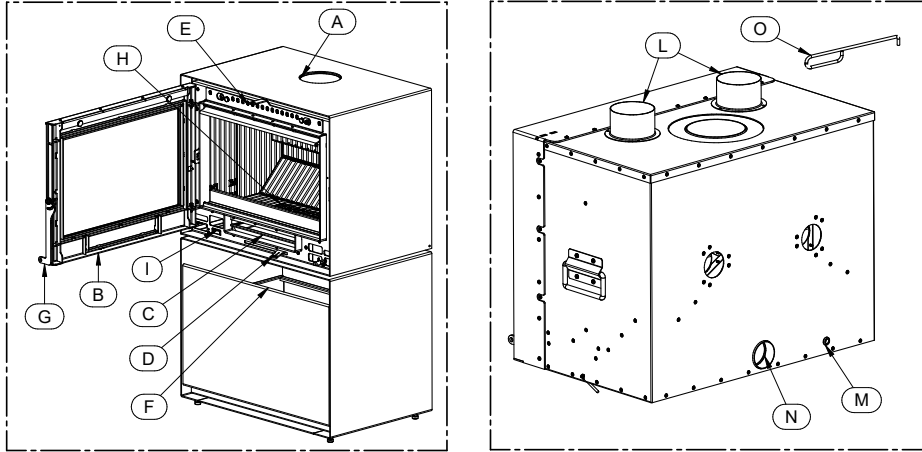

**KEY**

|   |                                 |   |                               |
|---|---------------------------------|---|-------------------------------|
| A | Smoke exhaust                   | H | Firebox grate                 |
| B | Door firebox                    | I | Fan switch (optional)         |
| C | Ash pan                         | L | Channelling collars           |
| D | Primary air lever               | M | Hole for fan cable (optional) |
| E | Secondary air lever             | N | Combustion air inlet pipe     |
| F | Wood drawer (only on Moonlight) | O | Riddling tool                 |
| G | Door handle                     |   |                               |

**D – Primary air lever**

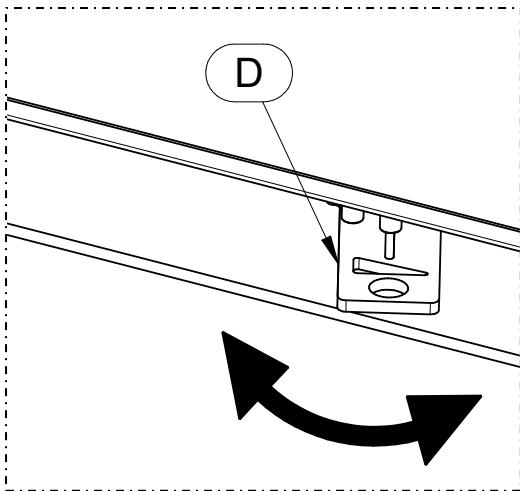


It is used to regulate the primary air inflow. The primary air passes through the grate of the firebox and fuels the combustion to determine its power and speed. Shift the lever to the left to increase the air inflow. Whereas to decrease the inflow air, move it to the right.



**ATTENTION:** When the appliance is operating the temperature of the primary air control is very high, so take care not to touch it. The riddling tool provided must be used when handling it.

**E – Secondary air lever**

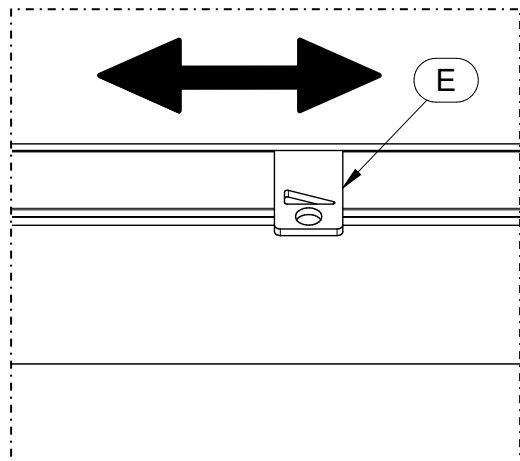


Control the secondary air inflow which has the function of keeping the glass clean as it flows across it. Shift the lever to the left to increase the air inflow. Whereas to decrease the inflow air, shift it to the right.



**ATTENTION:** When the appliance is operating the temperature of the secondary air lever is very high, so take care not to touch it. The riddling tool provided must be used when handling it.

**G – Door handle**

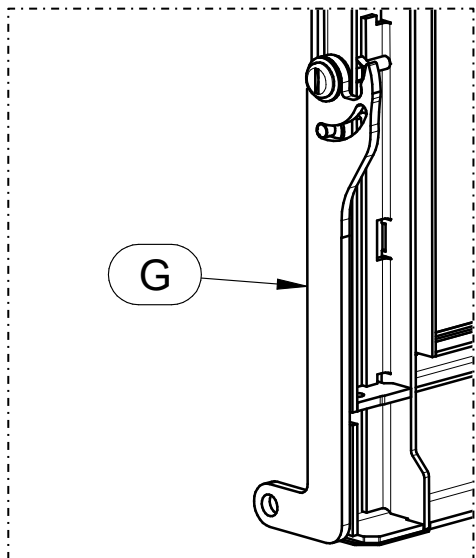

Allows the door to be opened to add fuel. Do not add additional fuel until the previous load has burnt or is reduced to embers, then open the firebox door slowly and place the logs in an orderly manner on the bed of embers. Complete the operation by slowly closing the door.



**ATTENTION: When the appliance is operating the temperature of the handle is very high, so take care not to touch it. The riddling tool provided must be used when handling it.**


4 – INSTALLATION

4.1 APPLIANCE LOCATION



Follow the general guidelines set out in paragraph 1.1 to the letter. Above all keep in mind that the floor of the installation site must be capable of bearing the weight of the appliance itself.

ATTENTION: The room where the appliance is installed must be well-ventilated and free from humidity and salty air. A high level of humidity or saltiness in the room can lead to the onset of rust or corrosion which will not be covered by warranty. The minimum distances specified in the technical data table must be observed if there are flammable elements near the appliance (e.g. match boarding, furniture, curtains, pictures and paintings, sofas). ATTENTION: it is mandatory to ensure that the shaft in which the insert is placed is well-vented as illustrated below and also respects the minimum clearances.

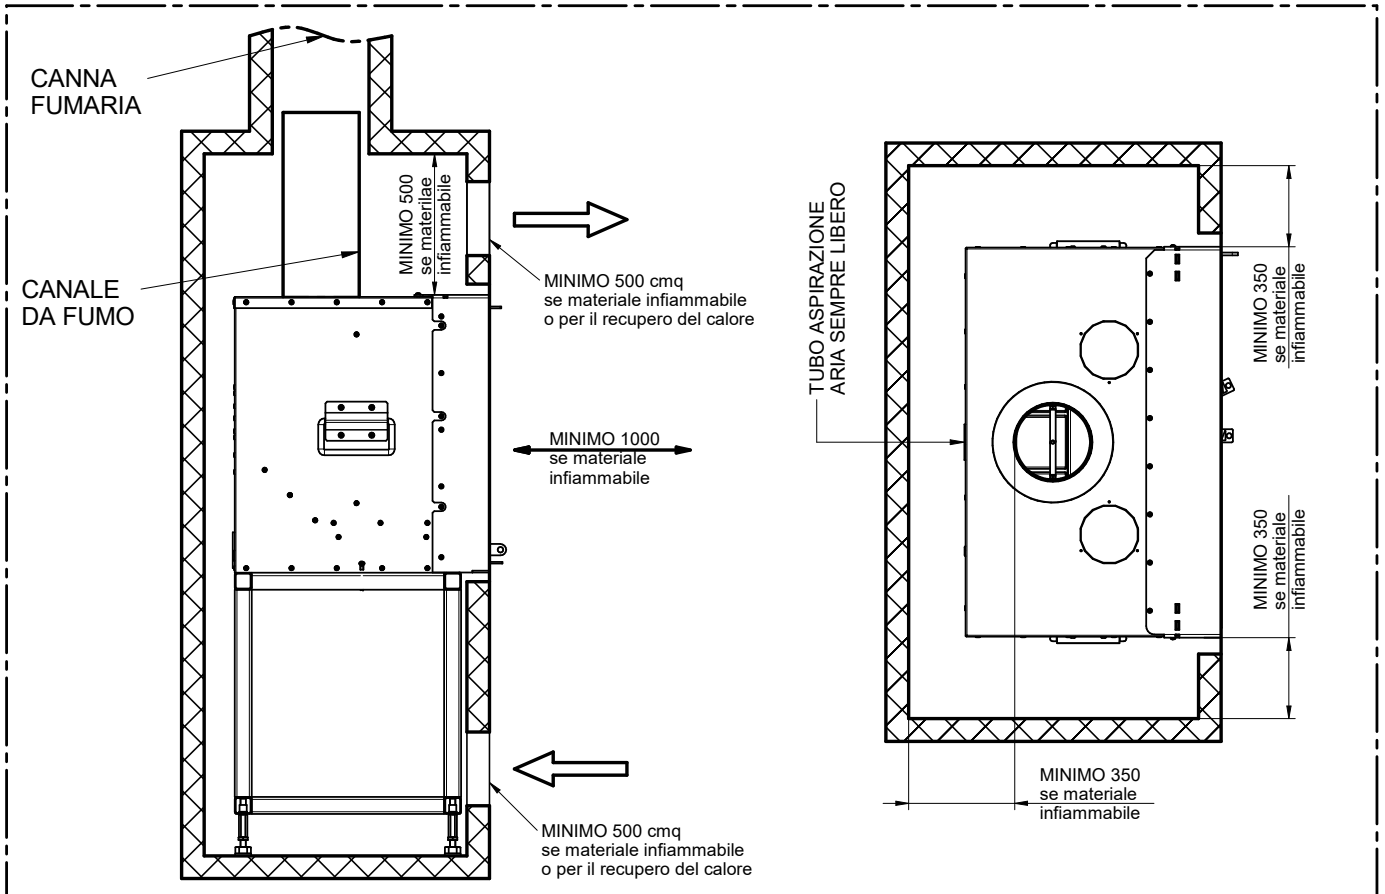

| LEGENDA   | KEY   |
|---|---|
| CANNA FUMARIA   | FLUE OUTLET   |
| CANALE DA FUMO  | FLUE PIPE   |
| MINIMO 500 se materiale infiammabile                                  | MINIMUM 500 if the material is inflammable                      |
| MINIMO 1000 se materiale infiammabile                                 | MINIMUM 1000 if the material is inflammable                     |
| MINIMO 500 cmq se materiale infiammabile o per il recupero del calore | Minimum 500 sq. cm if inflammable material or for heat recovery |
| TUBO ASPIRAZIONE SEMPRE LIBERO  | EXHAUST TUBE ALWAYS FREE  |
| MINIMO 350 se materiale infiammabile                                  | MINIMUM 350 if the material is inflammable                      |

Installation in the vicinity of heat-sensitive materials is only permitted if suitable insulating and fireproof protection is placed between the object and the appliance (ref. Uni 10683). If the support base is made of wood or any other combustible material, it is mandatory to install a suitable fireproof floor protector plate between the appliance and the base. Failure to observe this instruction will immediately invalidate the warranty. It is recommended to leave a gap of 250 mm on the RH and LH sides of the insert to facilitate routine and extraordinary maintenance operations.

The installer must issue a certificate of conformity for the installation which includes the design plans and the following documents:

- a) Report containing the type of materials utilised.
- b) Project as defined in Article 5 of Ministerial Decree n° 37 22 January 2008.
- c) Drawing of the finished installation.
- d) References to existing partial or previous declarations of conformity (e.g. electrical wiring).
- e) Copy of the certificate of recognition of the professional technical qualifications.





These documents must, by law, be kept together with the use and maintenance booklet. The customer is responsible for verifying, directly or indirectly, that the installation has been carried out to perfection in accordance with relevant regulations in force. Do not install the appliance in unsuitable rooms such as bedrooms, bathrooms, garages and/or lock-ups. It is forbidden to place the appliance in environments with an explosive atmosphere. **ATTENTION**, the appliance is not simply a household appliance: if the instructions set out in this booklet are not followed and/or if installation of the appliance is not executed perfectly and/or the provisions in force are not strictly complied with, dangerous conditions could arise for both objects and persons. It is the user's responsibility to verify the presence, in the room, of a vent necessary for supplying oxygen to the generator. The installer must provide the final user with verbal instructions on the correct use of the appliance when the appliance is set at work for the first time.



## 4.2 UNPACKING THE APPLIANCE

The appliance is supplied packaged on a pallet; always use trolleys to move the appliance and the appliance must always be in a vertical position. Before positioning and installing it dismantle the appliance from the pallet as described:

- Remove the straps and cardboard (Figure 1).
- Remove the screws (A) that secure the insert to the pallet (Figure 2).
- Check that all the mobile parts are in place; remove the labels and stickers from the glass.







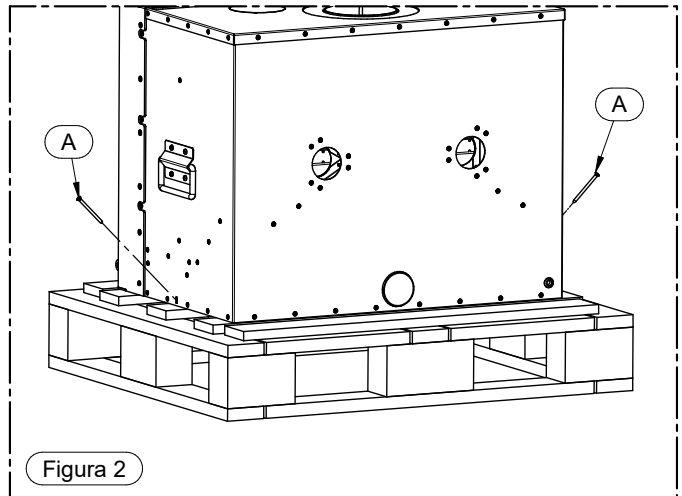
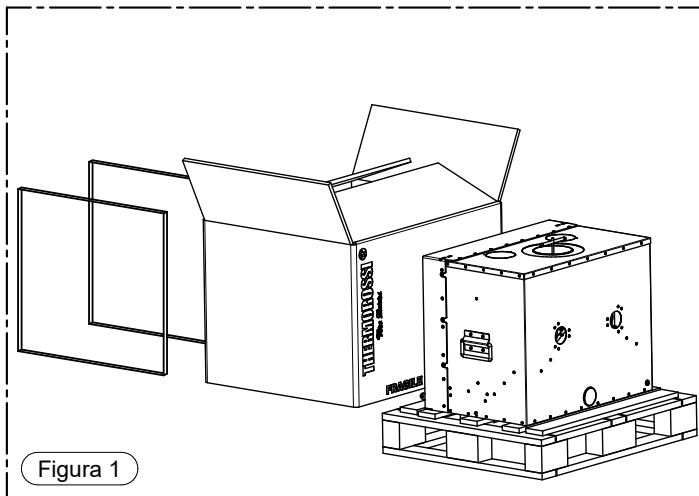


**IMPORTANT: HANDLE THE APPLIANCE WITH CARE AS DAMAGE CAUSED DURING THE UNPACKING OPERATION WILL NOT BE COVERED BY THE WARRANTY.**

## 4.3 UNPACKING THE UNIT (ONLY TRILOGIES)


The unit is supplied packed on a pallet; it must only be moved using forklift trucks and must always be kept in an upright position. Before positioning and installing the unit, it must be removed from the pallet as follows:

- Remove the cardboard box C (Figure 1) and the protective metal sheets G and F using the screws H (Figure 2).
- Remove the blocks I using the screws L (Figure 3). Remove the parts M, N, O and Q using the screws P (Figure 4).
- Remove the product from the pallet using a trolley, lifting it from the rear (Figure 5).
- Refit protective plate G, previously removed, using screws R (Figure 6) and proceed to transport the product, using a trolley, to its final location, lifting it from the side (Figure 7).
- Remove the fasteners S using screws T (Figure 8).

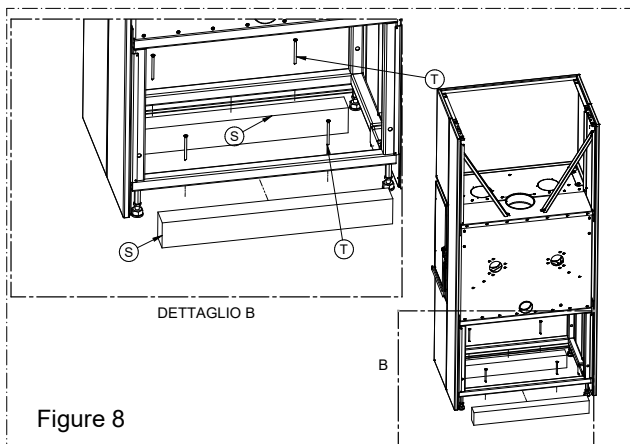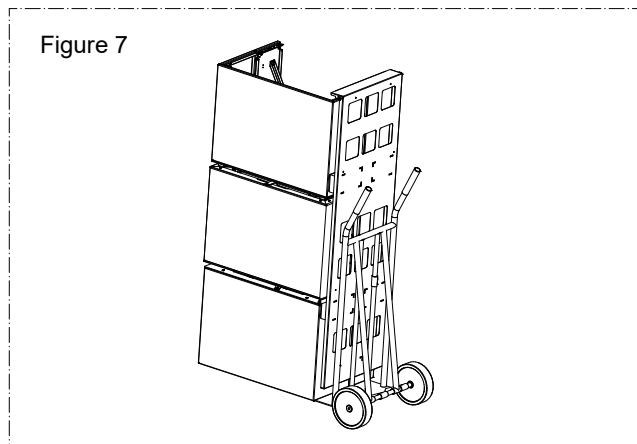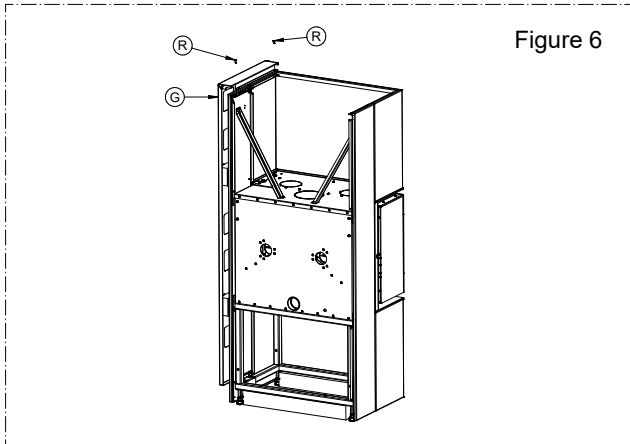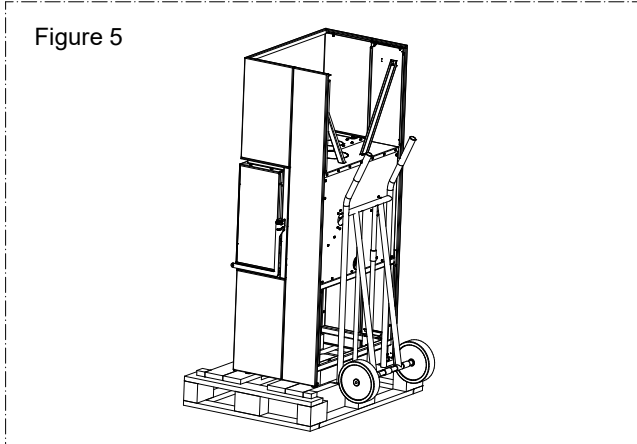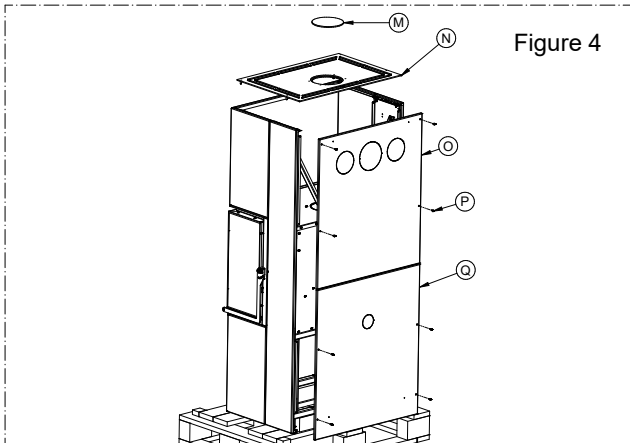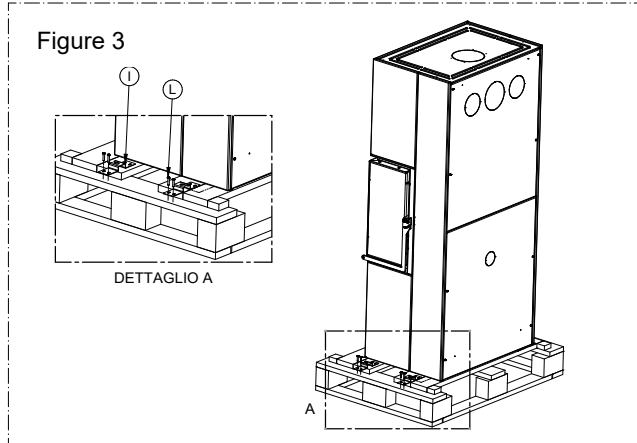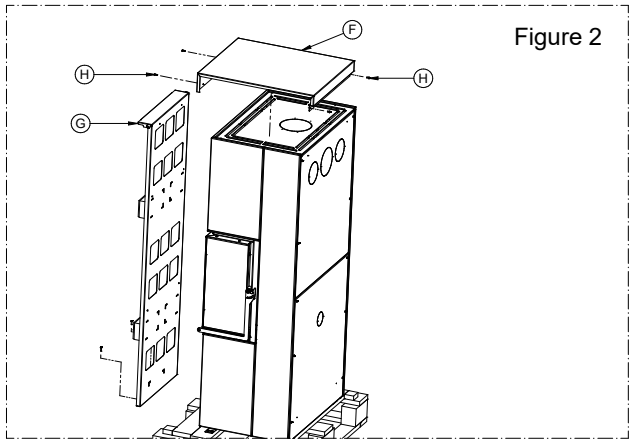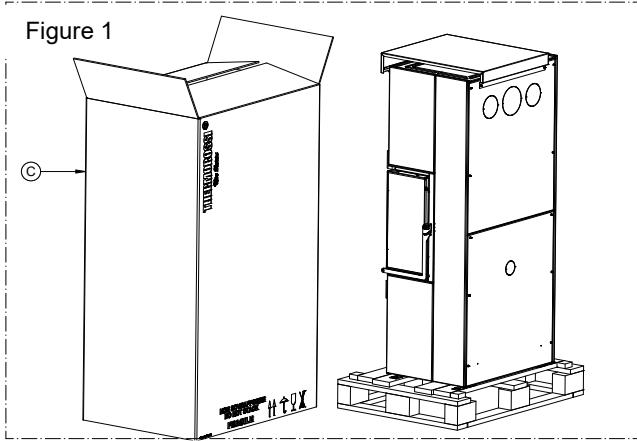

#### 4.4 ASSEMBLING THE ADJUSTABLE PEDESTAL (OPTIONAL)


- 1) Fit the feet (E) to the adjustable pedestal (A), tightening them until the desired height is achieved. If it is necessary to further raise the height of the insert, the headless screw (B), spacer (C) and nut (D) can be added.
- 2) Position the insert over the adjustable pedestal (A) and secure it with the bolts (F) and washers (G).
- 3) Anchor the pedestal to a load-bearing surface, using anchors that can fully support the total weight of the appliance.

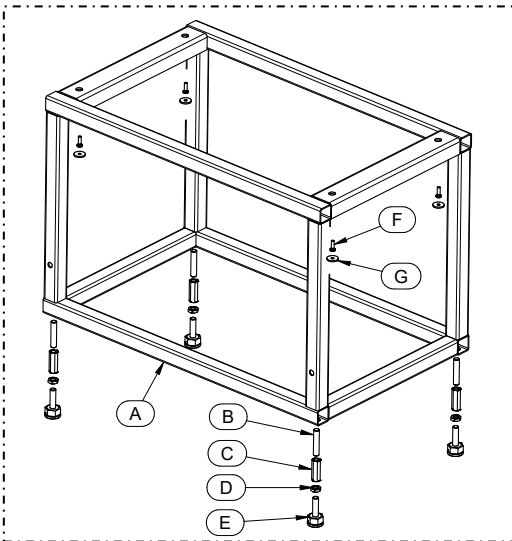

**ATTENTION:** Check that the floor and base surface are firm and able to support the weight of the product and all its accessories. It is important to firmly bolt the product to a sturdy surface to ensure maximum safety and avoid the risk of the appliance tipping over or falling.



#### 4.5 LEVELLING THE APPLIANCE IF MOUNTED ON AN UNEVEN SURFACE

If the appliance is to be installed on an uneven base, it can be levelled by fitting the 4 screws (A) supplied and adjusting their heights. See the figure alongside.

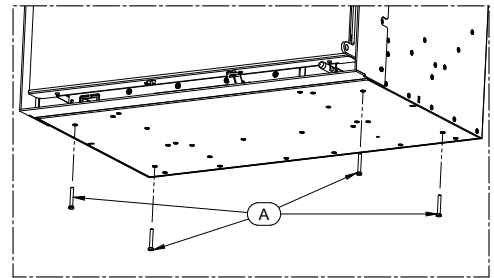

#### 4.6 ASSEMBLING THE FRAME FINISH (OPTIONAL)

- 1) Remove the frame (B) installed on the insert by loosening the screws (A), see Figure 1.
- 2) Install the frame finish (F) using the previously removed screws (A), see Figure 2.
- 3) Install the lower profile (E) on the frame finish (F) using the bolts (C) and nuts (D), see Figure 2.

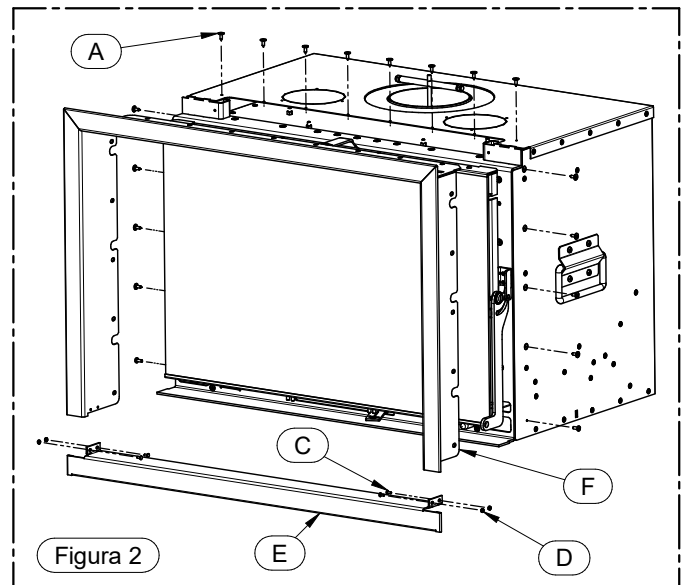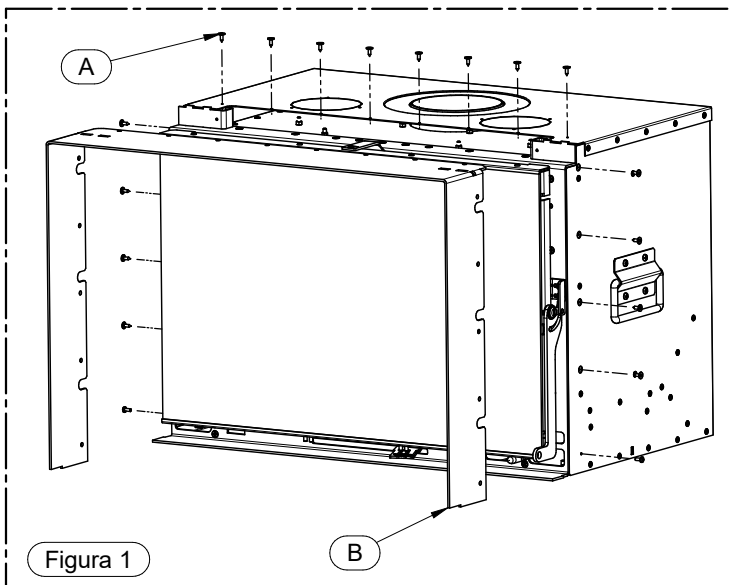

4.7 ASSEMBLING THE COMPENSATING PROFILES (OPTIONAL)

- 1) Remove the screws (A) of the frame installed on the insert.
- 2) Install the support (B) using the previously removed screws (A). Do the same on the other side.
- 3) Cut the compensating profiles (E,F,G) to the required dimensions and assemble them using the screws (D) supplied.
- 4) Fit the frame created in this way to the support (B).





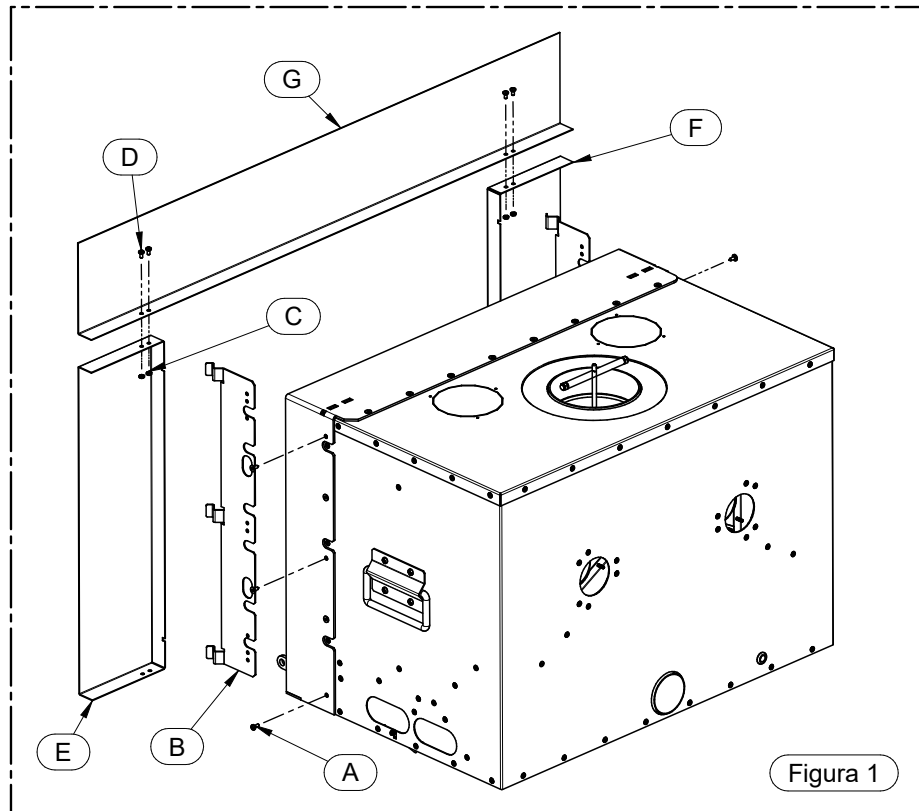


Figura 1

4.8 ASSEMBLING THE SMOKE OUTLET FIXING KIT

- 1) Remove the cast irons (A) and (B) from the crown of the insert, see Figure 1.
- 2) Drill the smoke channel at the optimum height and fix the threaded upper crosspiece (C) inside it using nuts (D) and bolts (E), tighten the bolt (L) complete with unthreaded lower crosspiece on the threaded upper crosspiece (C), see Figure 2 and 3.
- 3) Pull the created assembly downwards and fasten bolts (F), washers (I) and (G) and nuts (H) to the lower crosspiece, see Figures 2 and 3.
- 4) Tighten bolt (L) until the smoke channel is firmly and tightly secured to the insert's exhaust pipe, see Figures 4 and 5. Then reassemble the previously removed cast irons.

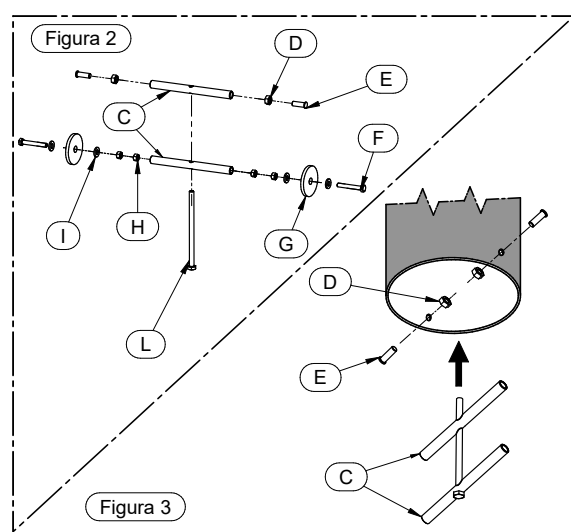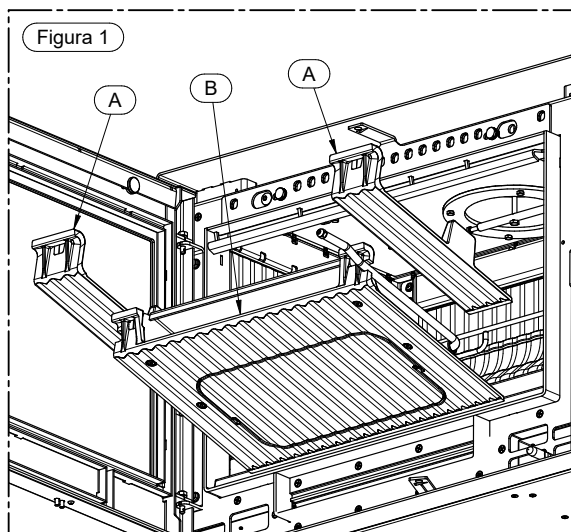
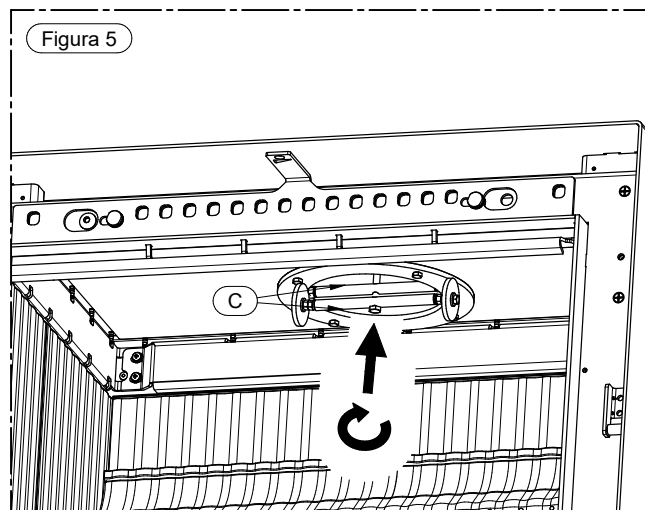




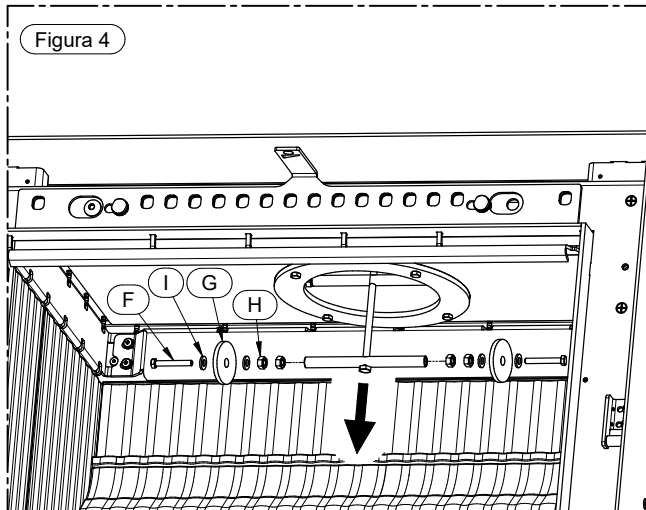


#### 4.9 ASSEMBLING THE AIRBOX4 KIT (OPTIONAL)



- 1) Remove the cast iron (A), insulating material (B), bolts (C), cover (D) and gasket (E), see Figure 1.
- 2) Insert the two fans (G) in their housing and secure them with screws (F), see Figure 2.  
**ATTENTION: run all the electrical cables behind the tabs (H) and bend them downwards so that they cannot come into contact with the fans and/or the cast iron parts of the appliance, see Figure 2.**
- 3) Run the switch cable (L) through the conduit until it comes out at the front. Connect the wires in the order shown to the switch connectors and then push it into its housing, see Figure (3).
- 4) Withdraw the power cable (M) of the fan from the appliance by running it through the rear hole (A) and connect it to the 230V - 50Hz power supply, see Figure 4.
- 5) Install the ventilation bar (P) and supports (O) and (N) using the 2 screws (M), see Figure 5. Then reassemble the previously disassembled components.
- 6) Ventilation must never be switched off during operation. The fan can be set in the following positions:
  - 0 – The fan switches on automatically at minimum speed as soon as the insert reaches a set temperature. It will switch off automatically only when the insert has cooled down sufficiently.
  - I – The fan will switch on immediately at minimum speed. It will only switch off if the user sets the switch to 0 and only if the insert has cooled down sufficiently.
  - II – The fan will switch on immediately at maximum speed. It will only switch off if the user sets the switch to 0 and only if the insert has cooled down sufficiently.

**ATTENTION: DO NOT USE THE INSERT IN THE ABSENCE OF ELECTRICITY. THE AIRBOX MAY BE EXPOSED TO VERY HIGH TEMPERATURES. FOR THIS REASON, ANY DAMAGE CAUSED BY PROLONGED EXPOSURE OF THE AIRBOX TO SUCH TEMPERATURES WILL NOT BE COVERED BY THE WARRANTY.**

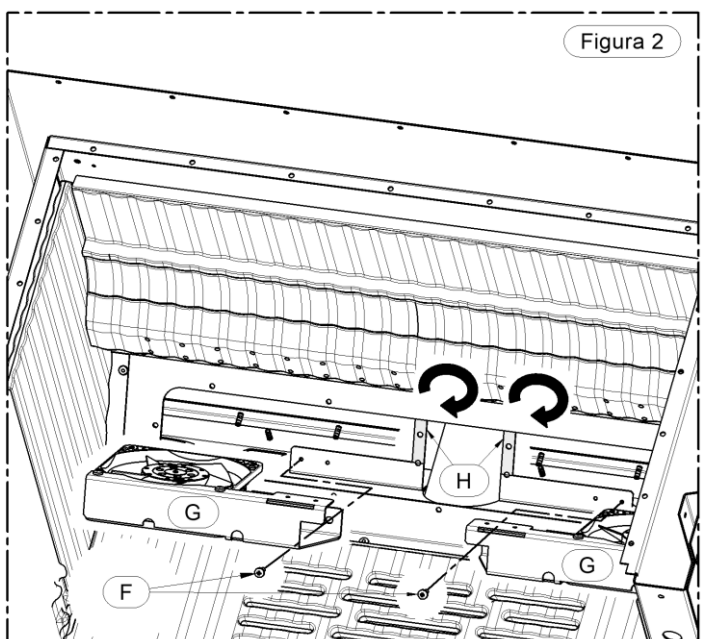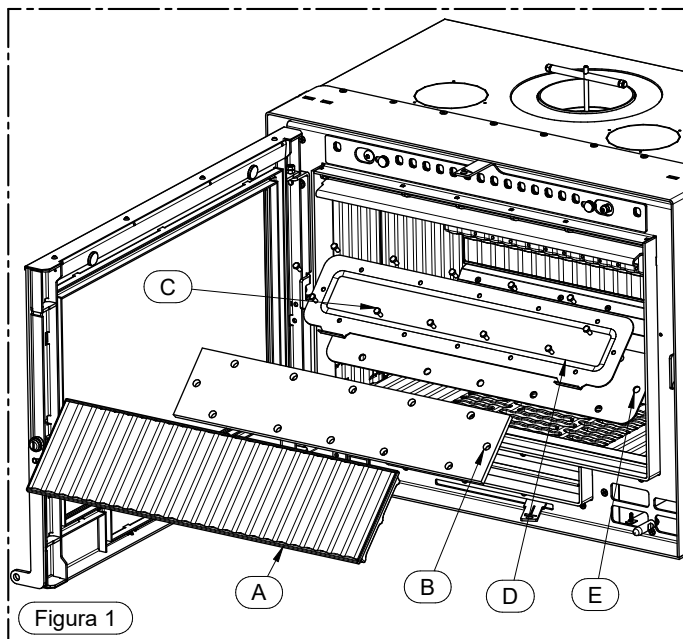

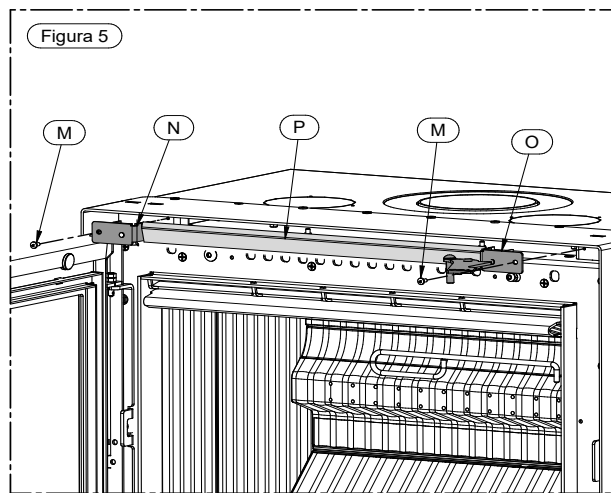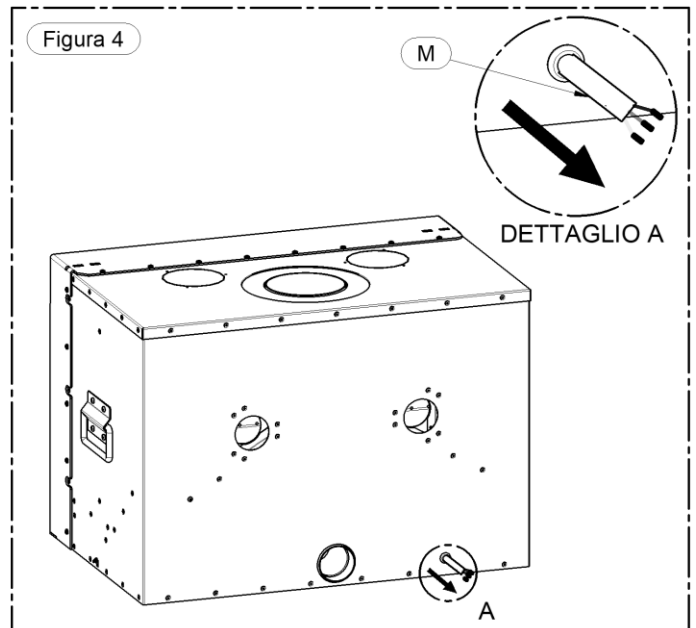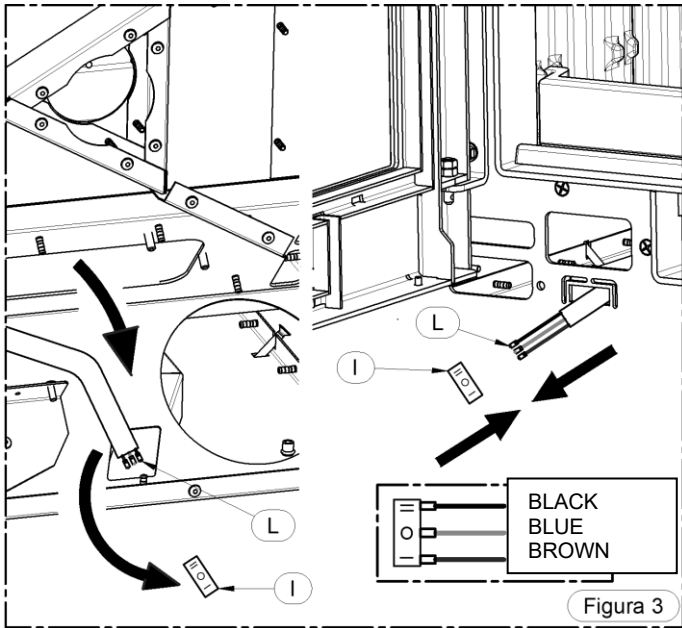


**ATTENTION:** If the channelling collars are not used, it is mandatory to permanently lock the lever mechanism with the air diverted to the front by replacing the standard wave washer (C) with the other washer (F) supplied. (See figures below)

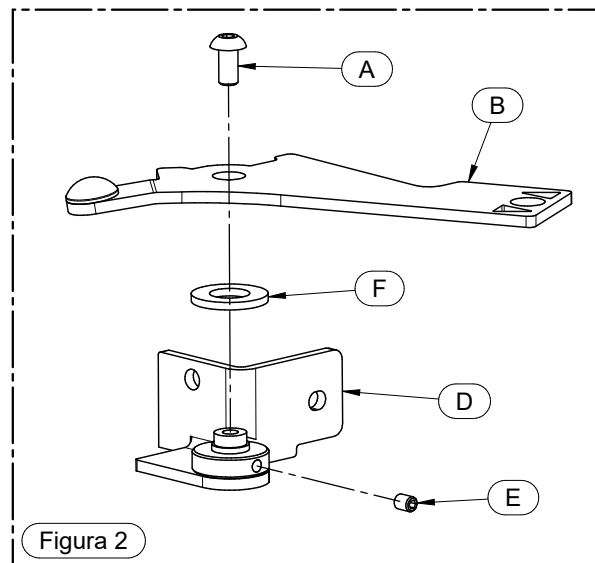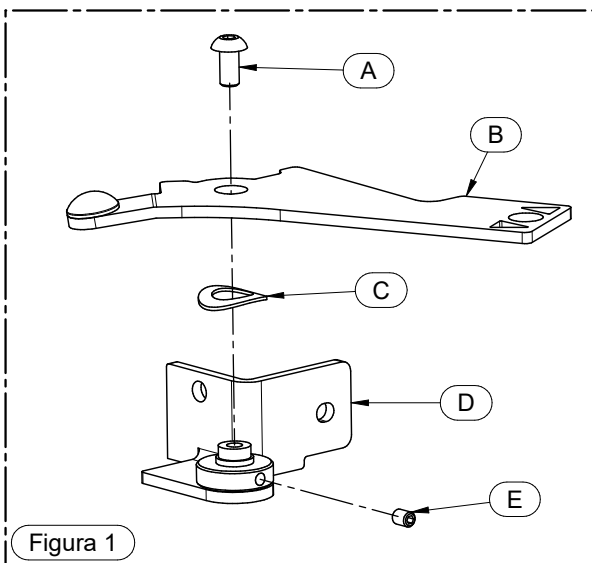

4.10 ADJUSTING THE AIR FLOW USING THE AIRBOX4 KIT (OPTIONAL)


The ventilation lever (P) can be used to direct the flow of hot air as shown in the figures below.

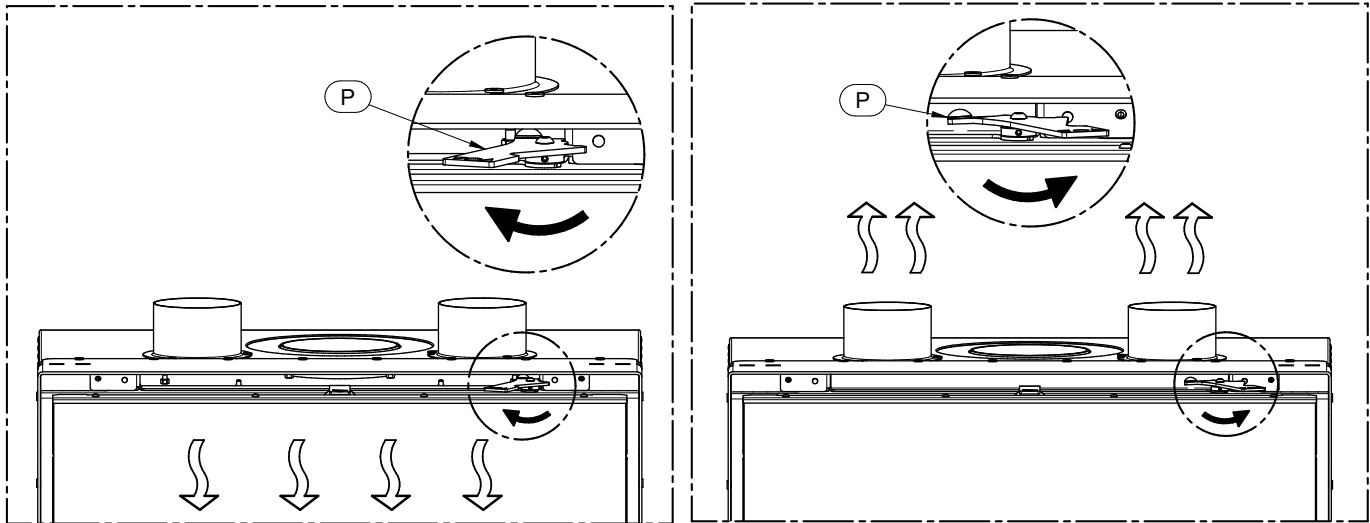

**ATTENTION:** When the appliance is operating the temperature of the ventilation lever is very high, so take care not to touch it. The riddling tool provided must be used when handling it. If the channelling collars are not used, it is mandatory to permanently lock the lever mechanism with the air diverted to the front by replacing the standard wave washer (C) with the other washer (F) supplied (see paragraph above).


4.11 ASSEMBLING THE FINISHING FRAME KIT FOR PLASTERBOARD - PANORAMA

1) Drill two 5 mm diameter holes, as shown in the drawings below:

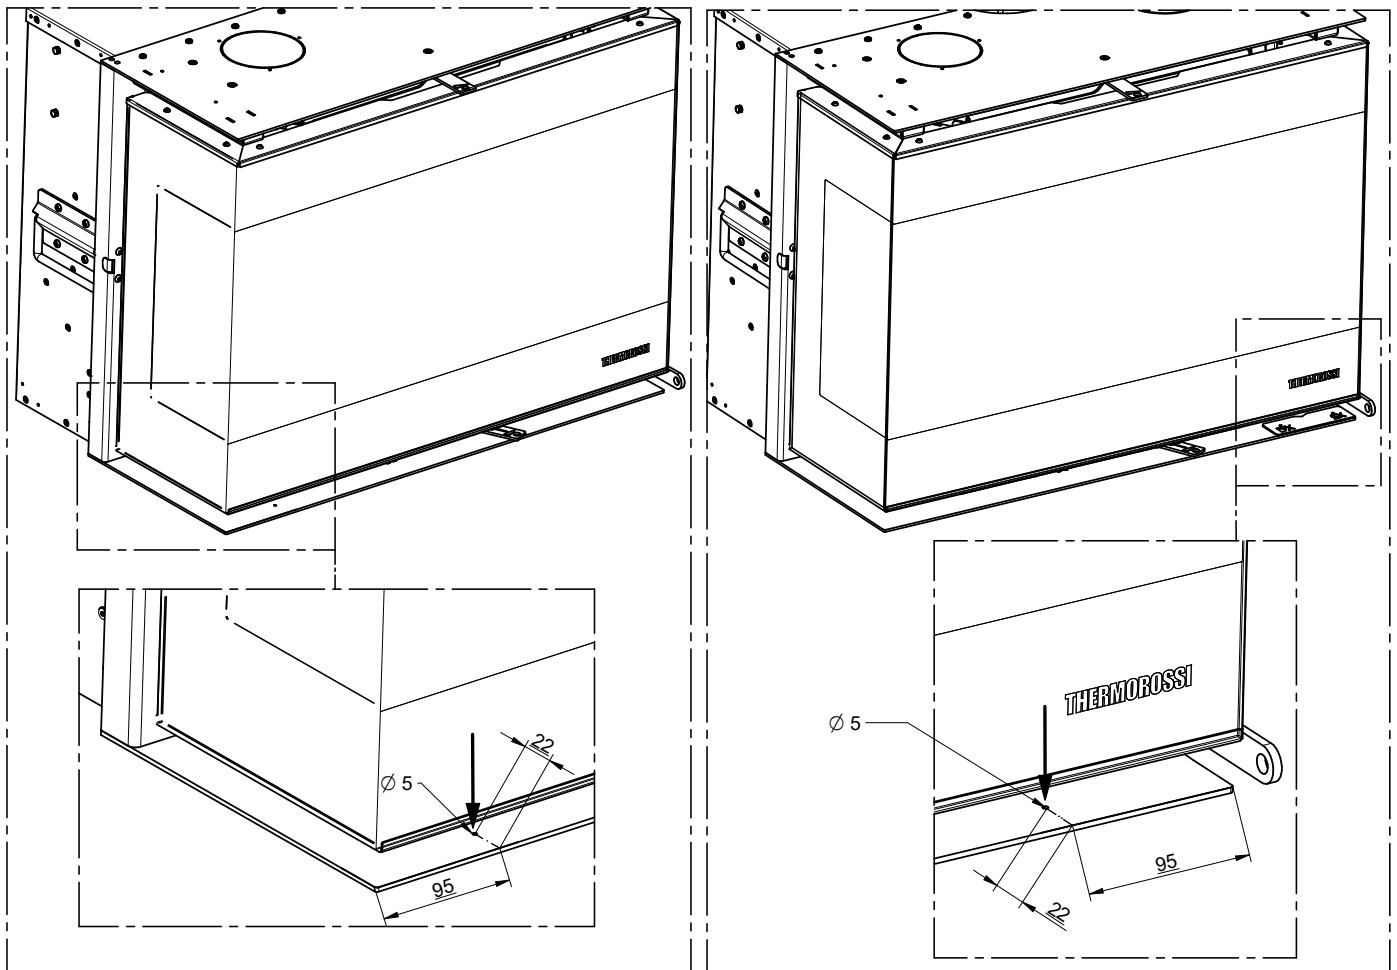


**SKYLINE – PANORAMA – FULLMOON – MOONLIGHT – TRILOGIE**


- 2) Assemble the upper profile C: first partially loosen the screw B, fit the profile C and then tighten the screw B. Assemble the lower profile C using the screws D, as shown in the drawings below:

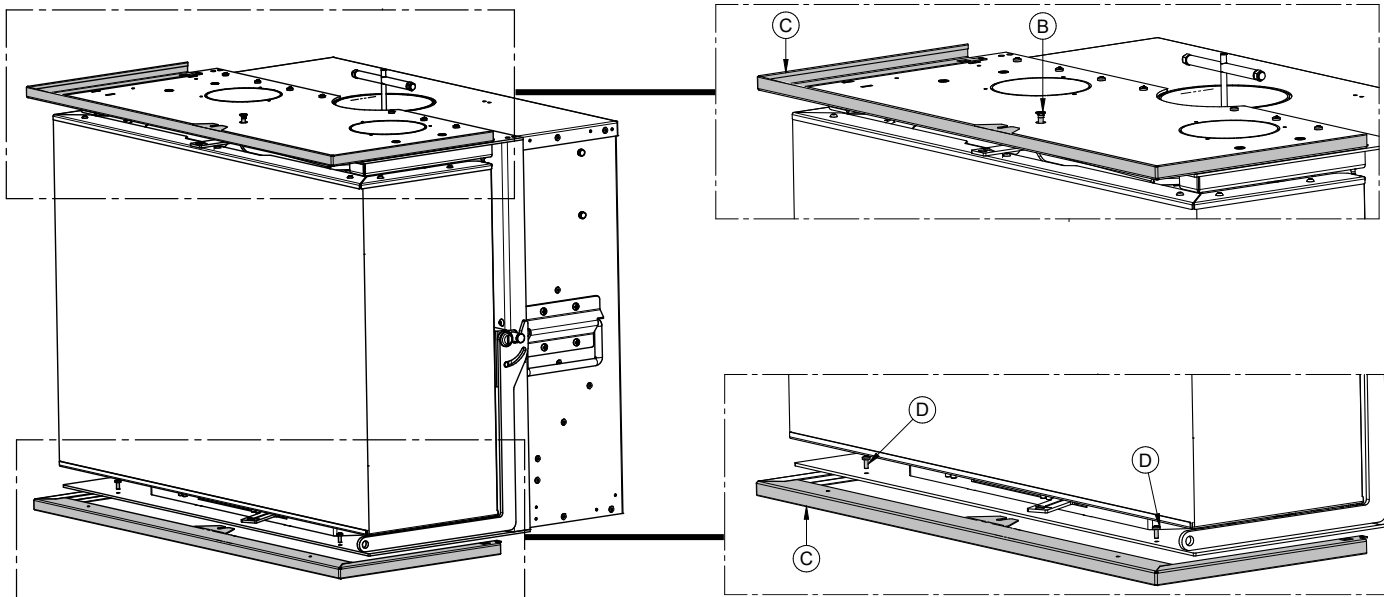

- 3) Secure both the lower and upper profile C using the elements E, F and G.

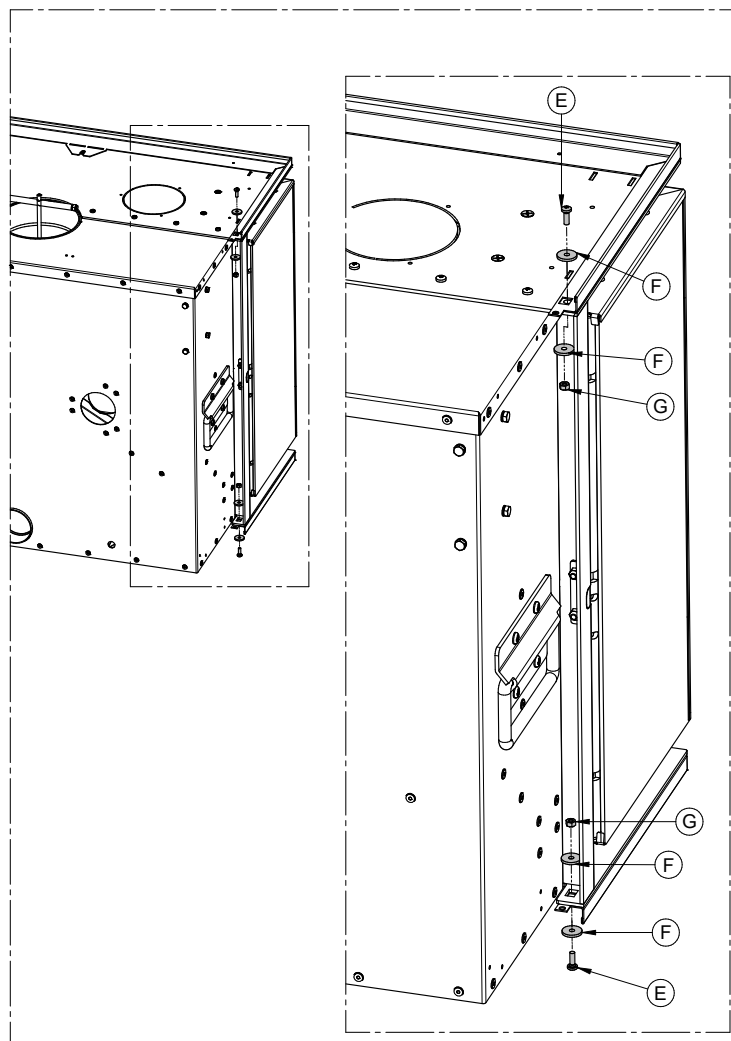


- 4) Fit the parts H or I using the screws D.

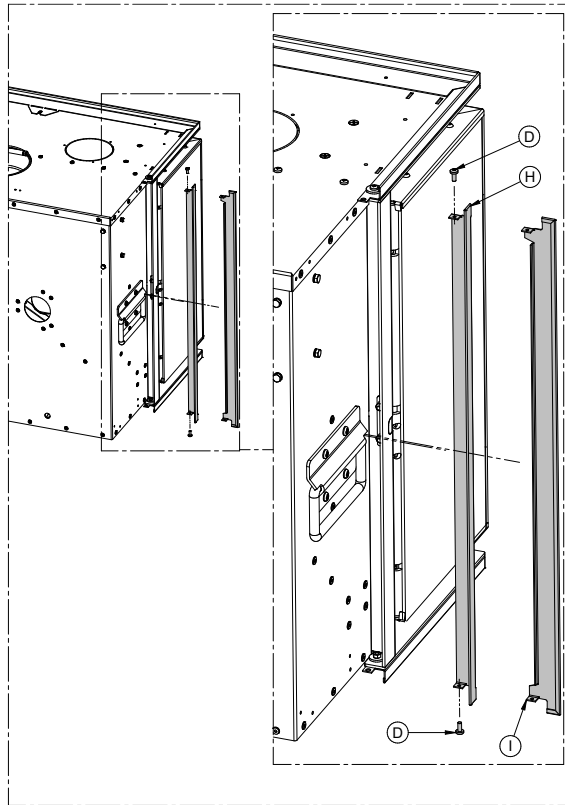

**4.12 ASSEMBLING THE WALL KIT - PANORAMA**

- 1) Assemble the brackets A using the screws B, see Figure 1.
- 2) Fix the bracket C to the wall using an adequate number of bolts, see Figure 2.  
Considering the weight of the appliance, it is recommended to use anchor bolts suitable for the type of support to which the appliance is mounted. Make sure that the support can easily sustain the whole weight of the appliance.  
**ATTENTION:** make sure that the wall plaster and finish can resist an operating temperature of at least 160°C. Given the working temperatures of the appliance it is normal for the wall to blacken, particularly if it is a light colour, after a season of operation.
- 3) Assemble the bracket E with the screws B, ensuring a distance of approximately 16 mm between the end of the bracket and the back of the insert, see Figure 3.
- 4) Hang the insert on the bracket C, fixed to the wall. Secure the insert to the bracket on both sides, first with the upper screw D to prevent the insert from sliding forward, and then with the lower screw D to block it in place, see Figure 4.
- 5) Fit the pins F on both sides, tightening them and using the corresponding washers O, and inserting the washers G only in the lower part, see Figure 5.
- 6) Snap the sides into the previously installed pins on both sides, see Figure 6.
- 7) Using the screw (I), create 6 M4 threads at the positions indicated in Figure 7.
- 8) Insert the spacers N. Secure the finishing plate M using the screws L, see Figure 8.

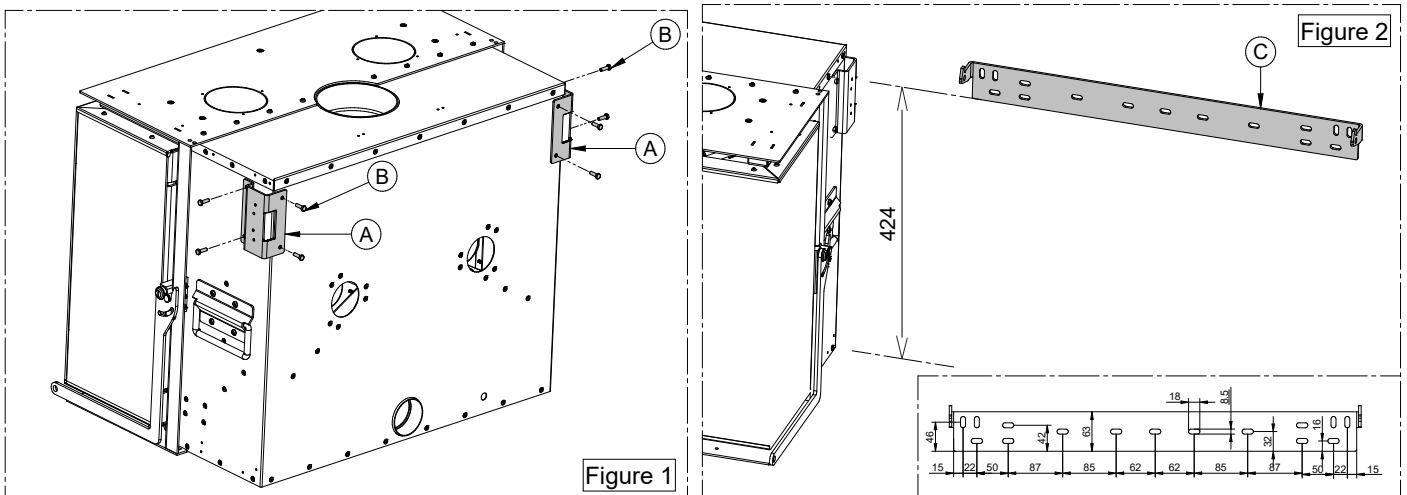

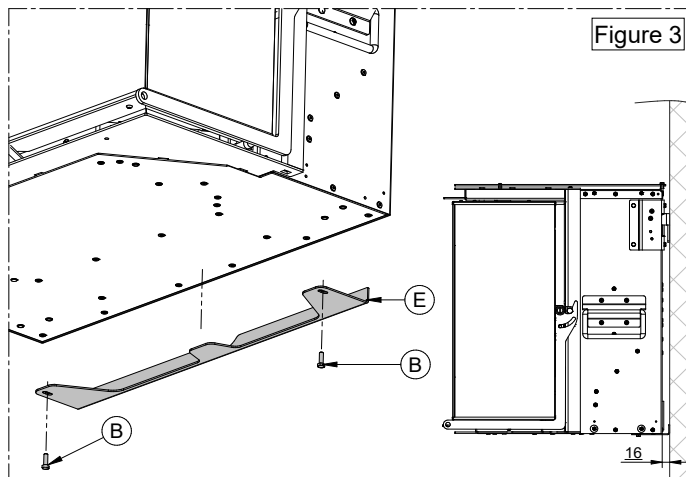


Figure 3

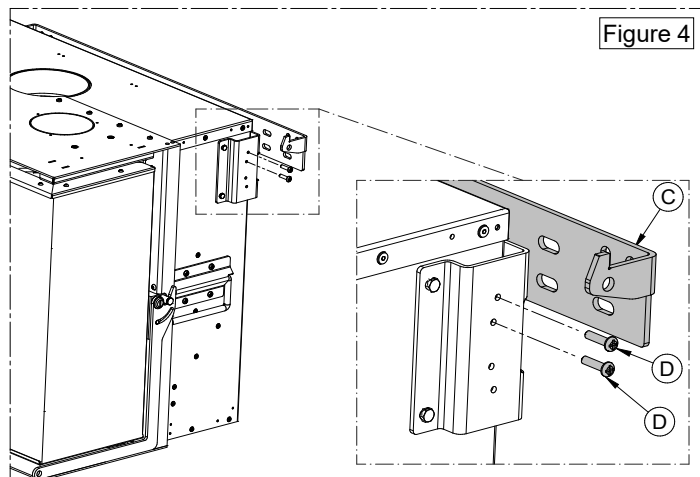


Figure 4

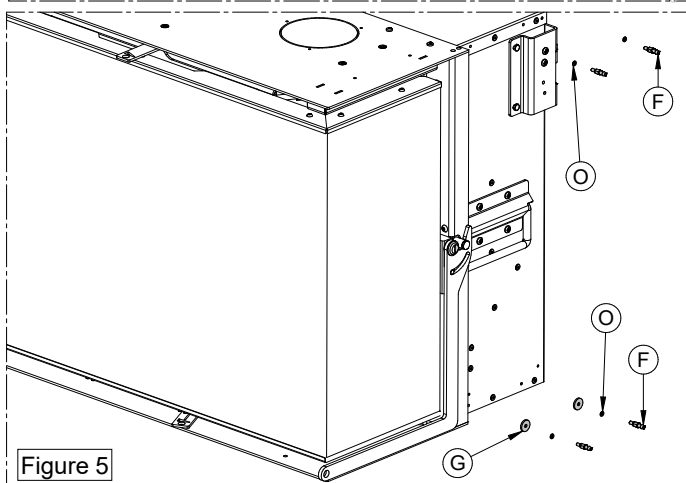


Figure 5

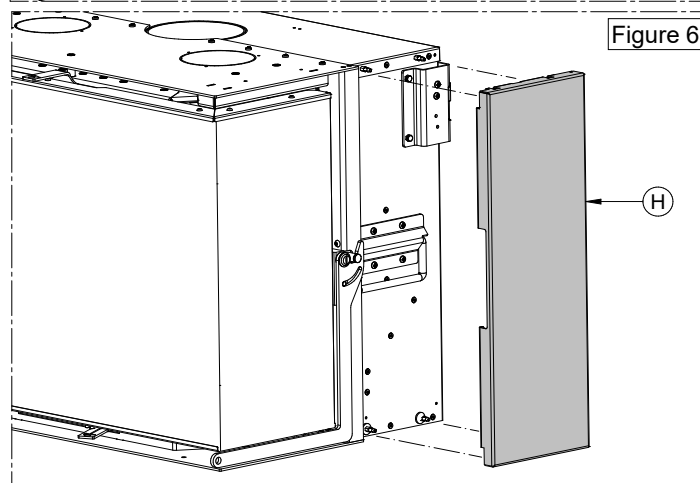


Figure 6

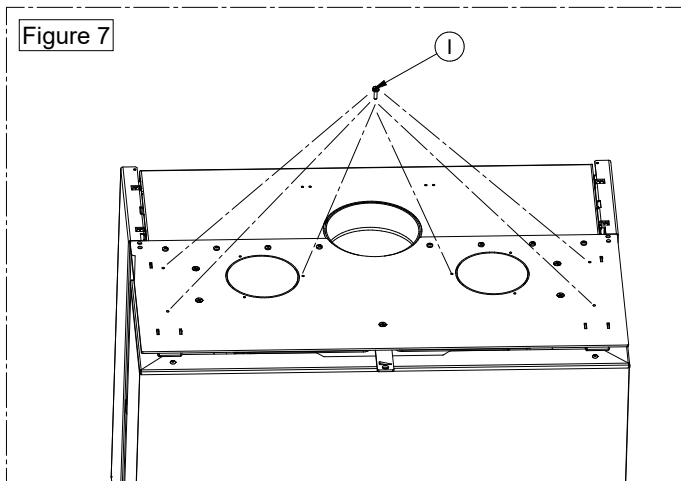


Figure 7


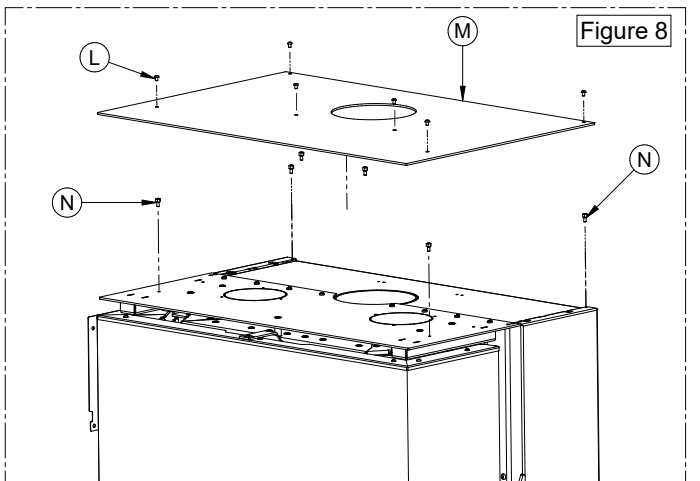


Figure 8

#### 4.13 INVERTING THE FIREBOX DOOR OPENING (SKYLINE and MOONLIGHT only)

The opening direction of the door can be inverted as follows:

- 1) Remove the door, and then the pins (L) and nuts (I), see Figure 1.
- 2) Remove the hinge (B) by removing the screws (D) and washers (C), see Figure 1.
- 3) Remove the hook (E) by removing the screws (F), see Figure 1.
- 4) Remove the handle (O) by removing the screw (P), washers (Q, S and N) and nuts (M), see Figure 1.
- 5) Remove the pin (G) by removing the nut (H), see Figure 1.
- 6) Reassemble all the components on the opposite side, see Figure 2.

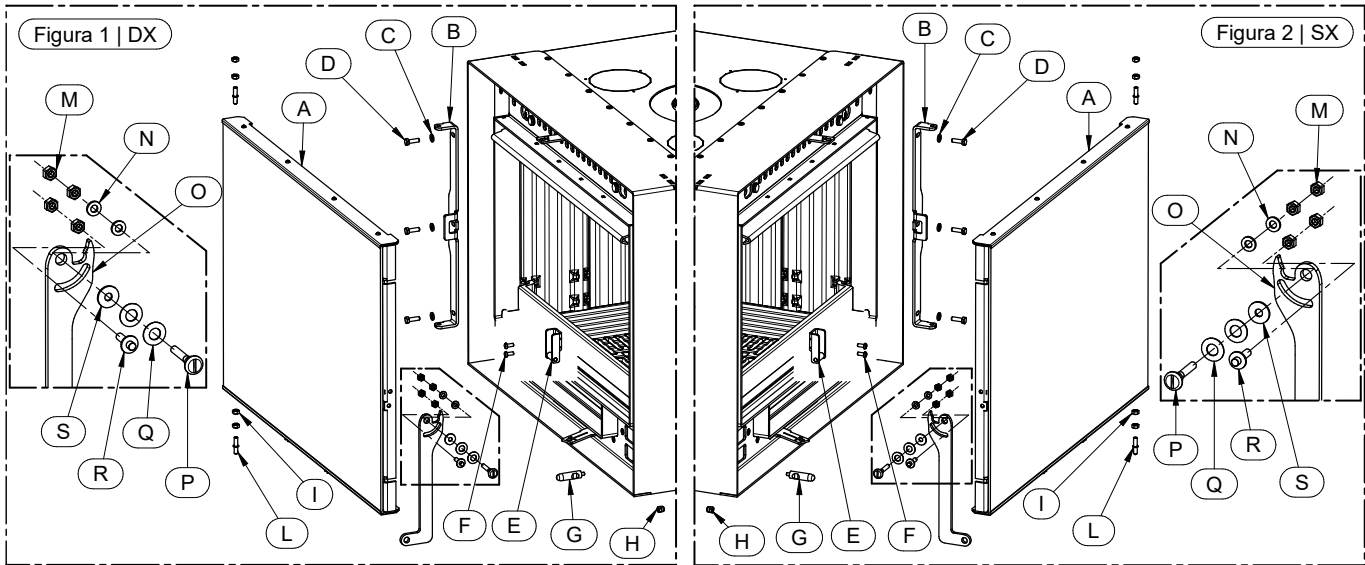

#### 4.14 ASSEMBLING THE MOON KIT



- 1) Only in the case where you intend to hang the appliance on a wall, the Q supports must be installed using the R and S screws and the T bar using the S screws, see Figure 1. If you do not intend to hang the appliance on a wall, proceed directly to the next step.
- 2) Only in the case where you intend to hang the appliance on the wall, the U bracket must be anchored to the wall following the instructions on the template provided in Figure 2 and then hang the appliance on it. To guarantee a perfectly flush wall mount, adjust bracket T outwards or inwards using the screws S, see Figure 1. Fix the bracket T on the wall using an anchor bolt through the hole provided to prevent the appliance from rising up. If you do not intend to hang the appliance on a wall, proceed directly to the next step.



**ATTENTION:** considering the weight of the appliance, it is recommended to use anchor bolts suitable for the type of support to which the appliance is mounted (minimum 4 M8, metal type). Make sure that the support can easily sustain the whole weight of the appliance.



**ATTENTION:** make sure that the wall plaster and finish can resist a continuous operating temperature of at least 160°C. Given the working temperatures of the appliance it is normal for the wall to blacken, particularly if it is a light colour, after a season of operation.

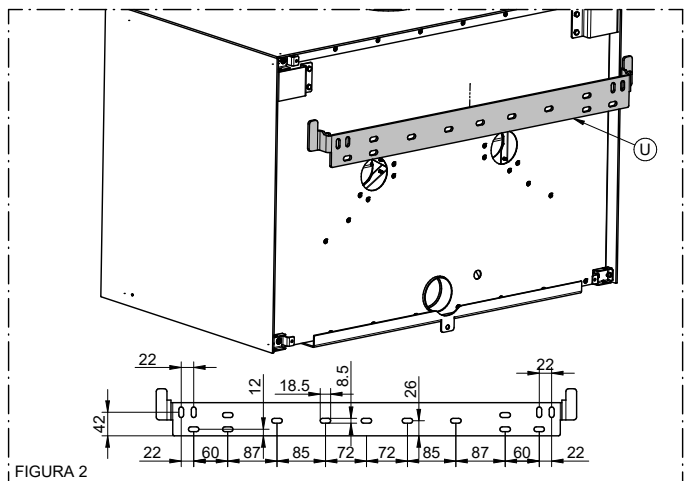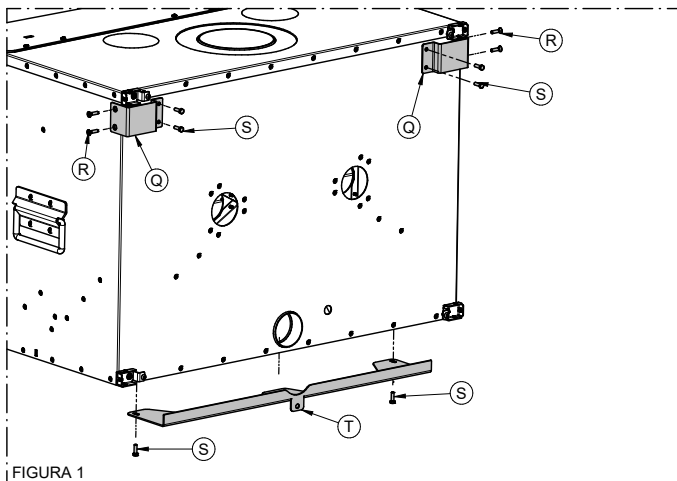

- 3) Remove the frame A by loosening the screws B and the handles X, loosening the screws Z, see Figure 3.
- 4) Fit the side profiles C and the top profile D using the screws E, see Figure 4.
- 5) Install the supports F with the screws H and install the shims G at the bottom, see Figure 5.
- 6) Install both the sides I using the nuts M and L, see Figure 6.
- 7) Install the top N using the nuts L and M.
- 8) Install the back O using the screws P.

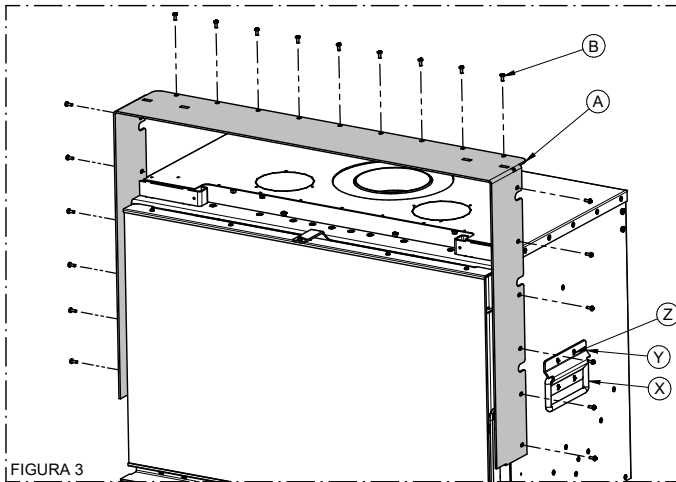


FIGURA 3

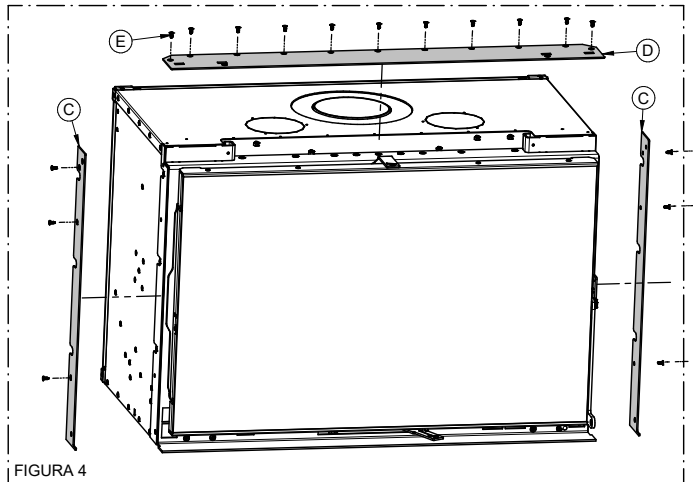


FIGURA 4

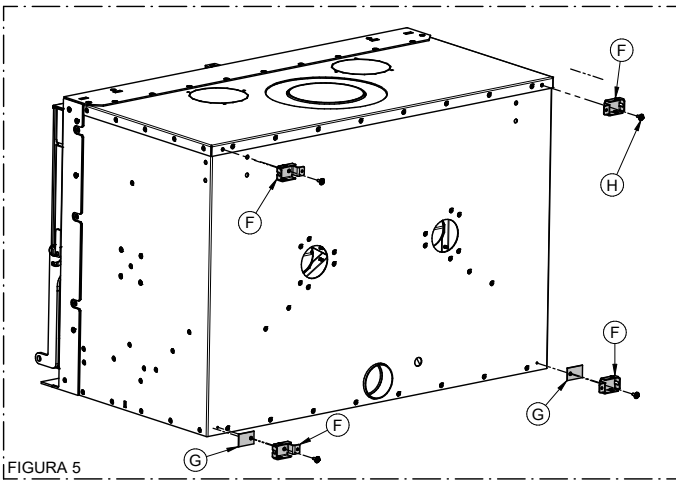


FIGURA 5

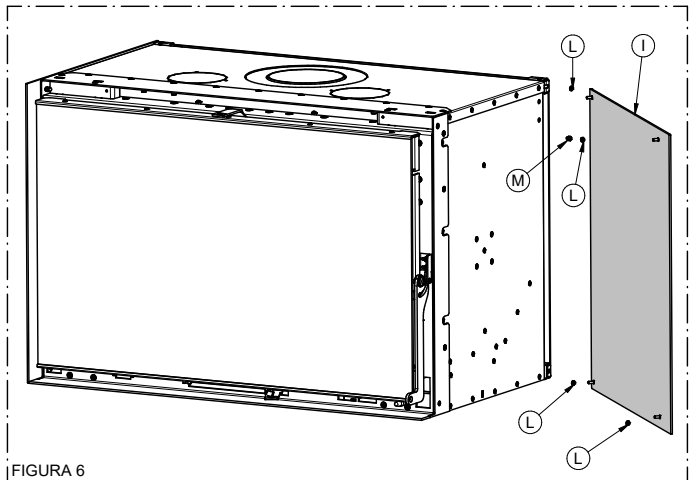


FIGURA 6

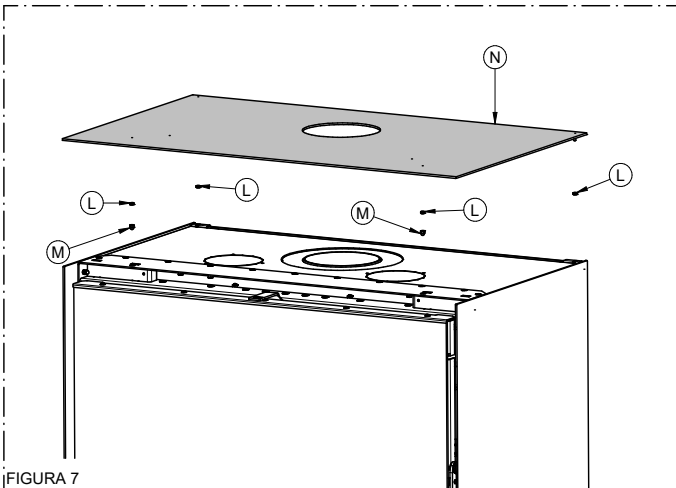


FIGURA 7


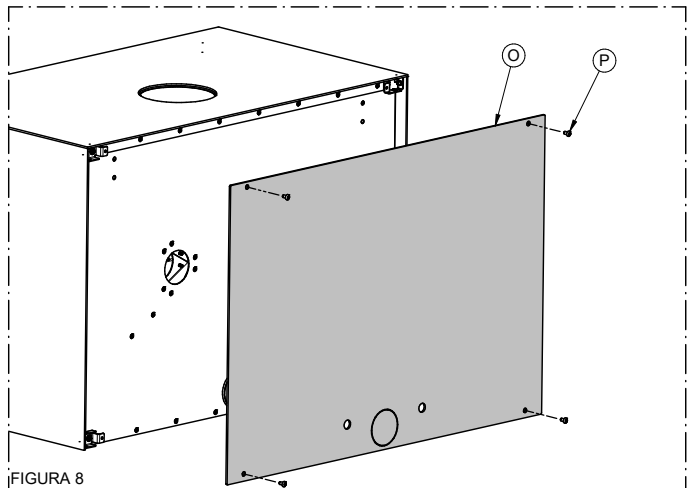


FIGURA 8



**4.15 ASSEMBLING THE REVERSIBLE ELEMENT - CORNER PANORAMA**

The reversible element can be fit on either side, but always on the same side as the handle. Follow the procedure below to install it:

- 1) Open the door of the insert and widen the teeth a little using a screwdriver, see figure below:

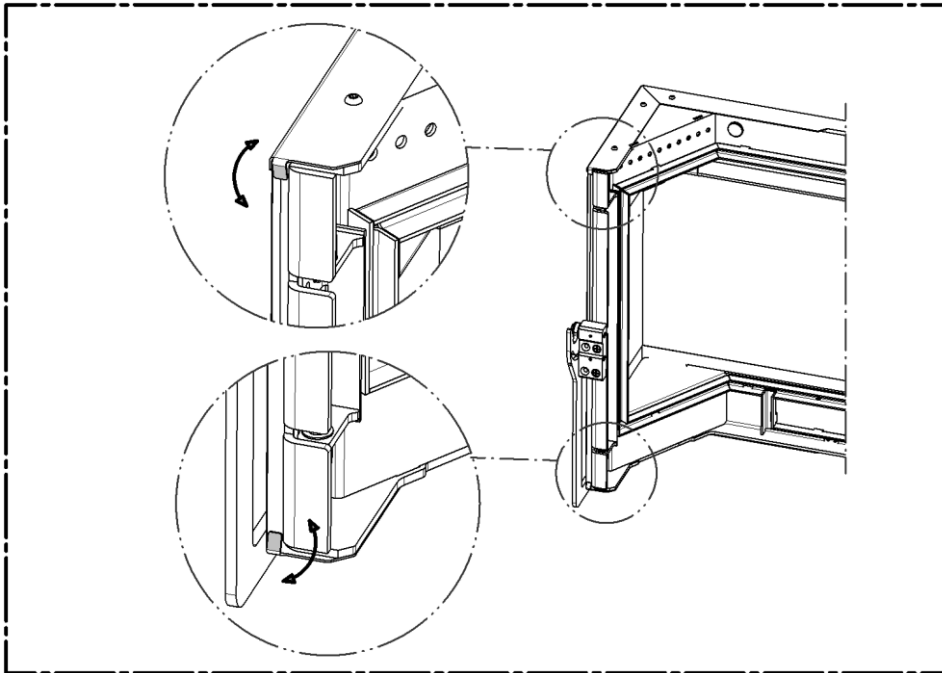

- 2) Remove the bracket (A) by loosening the screws (B), remove the glass and insert the reversible element (C). Then refit the bracket (A), see figures below:

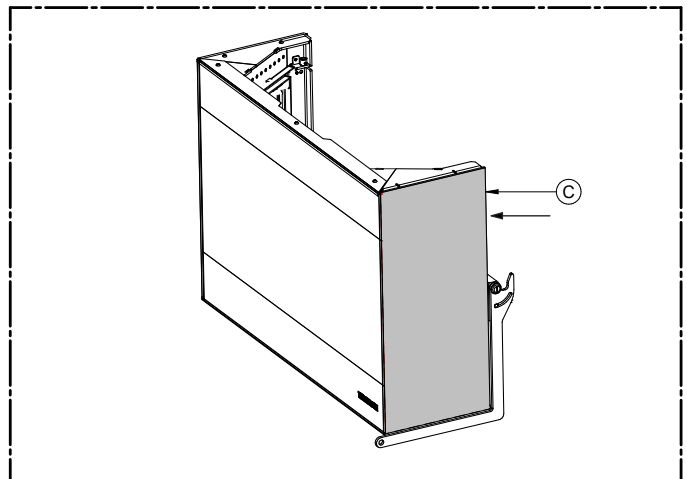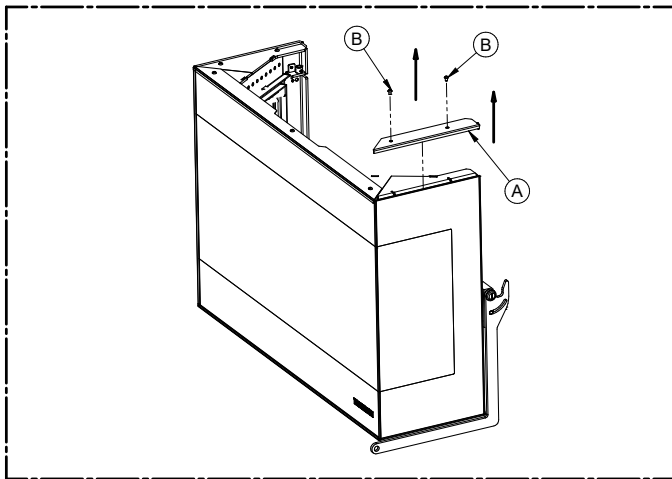


**4.15 DRAWING COMBUSTION AIR FROM OUTSIDE**

The appliance is fitted with an intake to enable drawing in the combustion air directly from outside the building. Connect the air intake on the appliance to the exterior of the building with suitable piping, capable of resisting high temperatures. The pipe's length must be maximum 600 mm.



**ATTENTION:** The suction duct must be protected with a grid and never be clogged. The protection grid, if installed, must be inspected and cleaned on a monthly basis. Moreover, a suitable windbreak fitting must be installed in the duct's terminal.

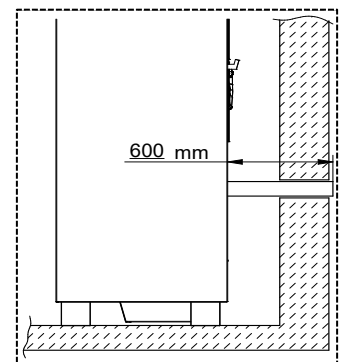

## 5 - USE OF THE APPLIANCE



The appliance, when operating, is hot to the touch, particularly the door of the combustion chamber: consequently, take care not to touch any surface. Your appliance has obtained the CE marking. The product must not be used by children, by persons with physical or mental impairments, by persons who are not familiar with the instructions for use and maintenance of the product (the instructions are found in this installation, use and maintenance manual). During the heating and cooling stages the appliance is exposed to considerable thermal expansions that can cause light expansion sounds. This is a normal process and is not a defect of the product.




**ATTENTION:** the door must always remain shut tight when the appliance is operating. While the appliance is in operation, the smoke exhaust pipes can reach extremely high temperatures: do not touch them! It is strictly forbidden to use any type of liquid or gaseous fuel to light the appliance. Do not place non-heat resistant or inflammable or combustible objects in the vicinity of the appliance: keep them at a suitable distance. Do not place wet clothing to dry on the appliance. When using a clothes horse, keep at a suitable distance. During the first lighting it is quite normal for the paint on the product to give off a slight smell as it completes its drying process. It is recommended to ventilate the room until the paint has completely dried.

### 5.1 LIGHTING

To startup the appliance proceed as follows:

- 1) Open the primary air completely by moving the lever (D) fully to the left (see figure below).
- 2) Open the secondary air completely by moving the lever (E) fully to the left (see figure below).

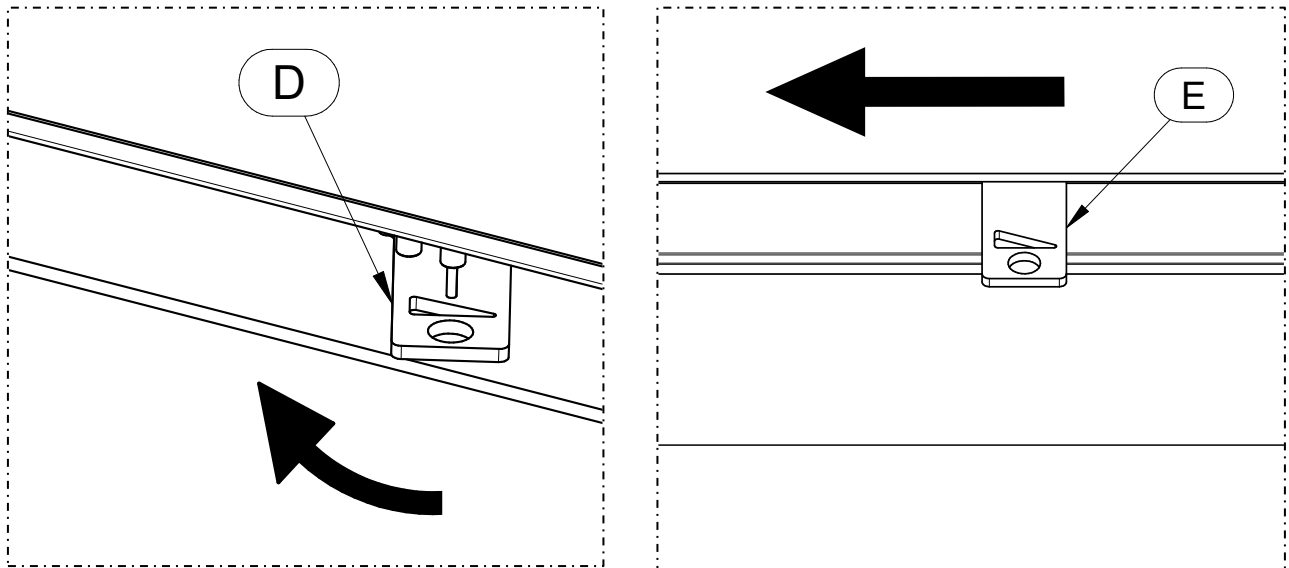

**ATTENTION: BEFORE LIGHTING THE APPLIANCE MAKE SURE THAT THE GRATE IN THE FIREBOX IS CLEAN, THAT IS THAT THERE IS NO ASH OR COMBUSTION RESIDUES.**

- 3) Open the firebox door, place some kindling in the firebox and light it with paper or any other tinder available on the market (see figure below).



**IT IS PROHIBITED TO USE ANY LIQUIDS OR GASES SUCH AS ALCOHOL, PETROL, ETC. TO LIGHT OR REKINDLE THE FIRE.**



**SKYLINE – PANORAMA – FULLMOON – MOONLIGHT – TRILOGIE**

- 4) Do not leave the appliance unsupervised while the lighting process is still in progress (roughly 30 minutes to complete the process) or whenever there are abundant burning embers present.
- 5) Once the lighting phase is completed, close the firebox door.




**ATTENTION: THE DOOR OF THE COMBUSTION CHAMBER MUST ONLY BE OPENED FOR THE LIGHTING OPERATIONS, FOR STOKING AND FOR REMOVING RESIDUAL MATERIAL. DURING NORMAL OPERATION THE FIREBOX DOOR MUST REMAIN SECURELY CLOSED.**  
**ATTENTION: DURING OPERATION THE TEMPERATURE OF THE FIREBOX DOOR IS EXTREMELY HIGH, SO BE CAREFUL NOT TO TOUCH IT. THE RIDDLING TOOL PROVIDED MUST BE USED WHEN HANDLING IT.**

**5.2 REFUELLING**

The stove is an intermittent combustion appliance so it requires refuelling. Once combustion is achieved inside the combustion chamber and consequently there are embers present, proceed with the first fuel feed:

- 1) Open the firebox door slowly to minimise the risk of smoke escaping and use the riddling tool to spread the embers.  
**N.B. It is prohibited to light or reload the fuel with a bed of embers higher than 3 cm as this does not guarantee the correct use of the appliance.**
- 2) Take one or two logs, each of which must not exceed the weight specified in the table below, and lay them parallel in the centre of the grate in the combustion chamber, as illustrated in the figures below.
- 3) Slowly close the firebox door using the special riddling tool.
- 4) Adjust the primary air lever and the secondary air lever as shown in the table below:

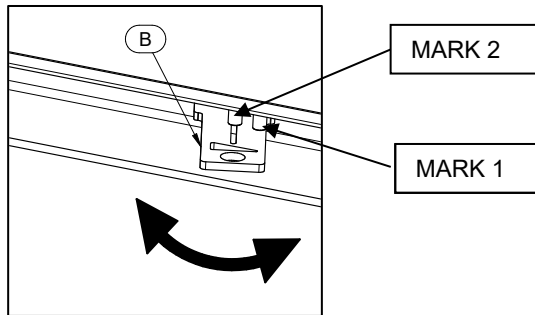

| Maximum fuel feed (kg) | No. of logs | Model  | PRIMARY AIR VENT | SECONDARY AIR VENT |
|------------------------|-------------|--|------------------|--------------------|
| 2.15                   | 2           | SKYLINE 490 8  | Mark 1           | Completely open    |
| 2.55                   | 2           | SKYLINE EVO6 490 9   | Mark 2           | Completely open    |
| 1.56                   | 1           | SKYLINE 540 6 – SKYLINE 800 6 – SKYLINE 1000 6 – PANORAMA 6 – MOONLIGHT 6<br>FULLMOON 6 – TRILOGIE 6   | Mark 1           | Completely open    |
| 2.07                   | 2           | SKYLINE 540 8 – SKYLINE 800 8 – SKYLINE 1000 8 – PANORAMA 8 – MOONLIGHT 8<br>FULLMOON 8 – TRILOGIE 8   | Mark 1           | Completely open    |
| 2.66                   | 2           | SKYLINE 540 10 – SKYLINE 800 10 – SKYLINE 1000 10 – PANORAMA 10 – MOONLIGHT 10<br>FULLMOON 10 – TRILOGIE 10                                    | Mark 2           | Completely open    |
| 2.84                   | 2           | SKYLINE 540 EVO6 11 – SKYLINE 800 EVO6 11 – SKYLINE 1000 EVO6 11 – PANORAMA EVO6 11<br>MOONLIGHT EVO6 11 – FULLMOON EVO6 11 – TRILOGIE EVO6 11 | Mark 2           | Completely open    |

- 5) To rekindle the fire clear the ash from the air passage slots to promote better combustion. Do not add additional fuel until the previous load has burnt or is reduced to embers, then open the firebox door slowly and place the logs in an orderly manner on the bed of embers. Complete the operation by slowly closing the door.



**5.3 PRESCRIPTIONS FOR CORRECT OPERATION**

- Respect the maximum declared consumption, do not overload the stove with excessive quantities of fuel as this could cause damage.

**THE FUEL FEED INTERVALS MUST NOT BE LESS THAN 1 HR.**

**LOADING A LARGER QUANTITY OF FUEL OR LOADING SEVERAL TIMES IN AN HOUR EXPOSES THE COMPONENTS OF THE APPLIANCE TO VERY HIGH TEMPERATURES. FOR THIS REASON THE WARRANTY WILL NOT COVER ANY DAMAGE CAUSED BY PROLONGED EXPOSURE OF THE APPLIANCE TO THESE TEMPERATURES.**



**DO NOT THROW THE WOOD INTO THE COMBUSTION CHAMBER, PLACE IT IN GENTLY. THROWING THE WOOD COULD END UP BREAKING PARTS. DAMAGE CAUSED IN THIS WAY IS NOT COVERED BY WARRANTY.**

- The appliance must not be used as an incinerator, the use of liquid or gaseous fuels is prohibited.
- Adhere strictly to the operating instructions set out in this manual.
- Always verify that the fuel loaded into the combustion chamber lights correctly. Make sure that this always occurs to avoid any buildup of combustible gases. The buildup of a high quantity of combustible gases could exceed the mechanical resistance of the glass and other components of the stove. For this reason the manufacturer disclaims all responsibility.
- In adverse weather conditions, such as for example low pressure, windy or rainy days or days with high outside temperatures, the effect could be a drop in draught or reverse draught. In these situations the flue gases may not be completely exhausted. Consequently, in these cases it is necessary to increase the primary air and load the smallest amount of fuel in order to reactivate the draught of the flue outlet. If you notice the smell of smoke in the room or stagnation of gases inside the combustion chamber avoid using the appliance.

## **6 – CLEANING AND MAINTENANCE**

### **6.1 FOREWORD**



To guarantee correct operation and optimal performance of the appliance at all times carry out the operations described below. Observe the recommended frequency.

If the product is unused for a prolonged period of time before starting up, it is mandatory to inspect the smoke channel and outlet to ensure that there are no obstructions. It is important to carefully follow the instructions set out below: failure to observe these instructions could cause serious damage to the product, to the system, to objects and to persons using the appliance.



Attention: do not wet or touch the appliance with wet hands. Never vacuum hot ash: this could damage the vacuum device. All the cleaning operations described in this manual must be carried out when the appliance is cold.

**The user must periodically clean the appliance, or have an authorised service centre clean it, as described in this manual. Moreover, once a year it is advisable to have an inspection carried out of the functionality of the flue outlet.**

### **6.2 CLEANING AND MAINTENANCE**

#### **EVERY TIME YOU REFUEL:**

- Let the ash drop through the slots in the grate. If necessary thoroughly clean the grate of the combustion chamber by de-ashing the grate through the slots. The air passage through the firebox grate must always be kept free from obstructions. Use the supplied riddling tool for this operation.

#### **EVERY TWO DAYS or WHENEVER NECESSARY:**

- Empty the ash pan. We recommend emptying the ash pan regularly before it fills up completely.
- Use an ash vacuum device to clean the combustion chamber.

**EVERY 6 MONTHS:**

- Activate the Smoke by-pass and clean the flue gas path with a flue brush as illustrated in the following photo:



- Thoroughly clean the smoke circuit with an ash vacuum cleaner.

**AT LEAST ONCE A YEAR:**

- Clean the flue outlet. If there are any horizontal sections, inspect them and clean out any ash and soot deposits before they block the passage of the flue gases.

**6.3 CLEANING THE GLASS**

The glass must only be cleaned when the appliance has cooled down completely with dry, non-abrasive cloths and non-aggressive detergents.

## 7 – SMOKE EXHAUST TUBE

### 7.1 FOREWORD



Due to the frequent accidents caused by poor functioning of flue outlets installed in private dwellings, we have prepared the following paragraph to assist the installer in his inspection of the parts concerned with eliminating the gases produced by combustion.



The exhaust pipe must be installed in compliance with regulations UNI7129, UNI 10683, and with the stated reference values. In particular, the outlet must comply with fire prevention regulations.

**It is important to carefully follow the instructions set out below: failure to observe these instructions could cause serious damage to the product, to the system, to objects and to persons using the appliance.**

### 7.2 ROOM VENTILATION



ATTENTION: the presence of extraction fans or similar appliances, if operating in the same room or space in which the product is installed, could cause problems for the correct operation of the product.

ATTENTION: do not obstruct the vents or the air inlets on the appliance.

The room where the appliance is installed must have a good air inflow to guarantee air for the appliance for the combustion process and for ventilation of the room. The natural air inflow must take place directly through permanent openings on the outer walls or through single or multiple ventilation ducting.

The ventilation air intake must be located away from pollution sources.

The openings in the walls must comply with the following conditions:

- have an unobstructed section of at least 6cm<sup>2</sup> for each Kw of installed thermal power, with a minimum limit of 100cm<sup>2</sup>;
- be made in such a way that the vent openings, both on the inside and outside of the wall, cannot be obstructed;
- be protected with grills or similar systems that do not reduce the opening section indicated above;
- be situated at a height near-floor level and they must not obstruct the correct operation of the combustion product discharge devices; if this position is not possible, the section of the ventilation openings must be enlarged by at least 50%.



**This chapter is not intended to replace UNI 7129, UNI 10683 and EN13240 standards. The qualified installer must in any case be fully aware of this standard and its amending versions.**

### 7.3 SMOKE OUTLET



The smoke channel, the exhaust pipe, chimney and flue outlet (defined as the system for the evacuation of combustion products), are parts of the heating system and they must comply with the legislative requirements of the Ministerial Decree D.M. 37/08 (ex Italian Law 46/90) and to the applicable specific installation regulations, according to the type of fuel. Fireplaces, stoves and barbecues must not be installed in locations where gas appliances type A and type B are present and operating (for the classification see UNI 10642 and UNI 7129). The connection between the appliance and the flue outlet must only receive exhaust from one heat generator.



The installer must provide one or more access points on the flue outlet to check the emissions once the appliance has been installed; these access points must be made in such a way as to be airtight sealable to prevent exhaust gas leaks.



It is recommended to provide insulation and to ensure the optimal sizing of the flue outlet in order to avoid the possible risk of condensation forming in the flue outlet.

#### 7.3.1 CHIMNEY TYPES

The following types of chimneys, constructed as described, are possible:

- System: chimney installed using a combination of compatible components (flue liner, insulation, outer casing, etc.), manufactured or specified by a single manufacturer and EC certified in accordance with the applicable standard;
- Composite chimney: chimney installed and built on site using a combination of compatible components such as flue liner (wall in direct contact with the flue gases), possibly also insulation and outer casing (wall) that may be supplied by different manufacturers or by the same manufacturer.
- Relining: operation involving the installation of a specific pipe in an existing shaft (even if newly constructed) made of non-combustible materials, free from obstructions and for single use.


*Installation, use and maintenance guide*  
**SKYLINE – PANORAMA – FULLMOON – MOONLIGHT – TRILOGIE**

7.3.2 FLUE OUTLET / FLUE SYSTEM COMPONENTS

**Components and accessories of a chimney**

**Key**

- 1 Chimney
- 2 Flow path
- 3 Smoke discharge tube
- 4 Thermal insulation
- 5 External wall
- 6 Outer lining
- 7 Flue outlet section
- 8 Multiwall chimney
- 9 Connector
- 10 Flue pipe
- 11 Heat generator

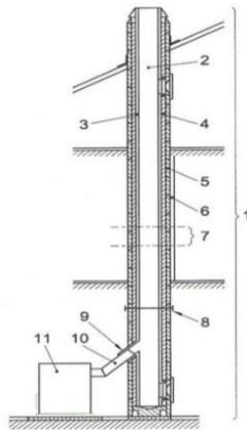

Every chimney must have a minimum number of components as laid down by standard UNI EN 1443 which are also indicated in the figure on the side.



**ATTENTION:** Wall outlets, that is outlets installed on the outer front wall without the use of a chimney/flue outlet /flue pipe to convey the combustion products to the roof, are strictly prohibited.

7.3.3 CONTROLS PRIOR TO INSTALLING THE APPLIANCE

The user must possess a certificate of conformance for the flue outlet (Ministerial Decree 22 January 2008, no. 37).


The flue outlet must be built in compliance with UNI 10683.

The smoke exhaust illustrated in the figure on the side is the best solution required to ensure that the flue gases are discharged. If you prefer to exhaust the smoke from the roof insert a union tee with inspection cap, connecting brackets suitable for the height of the flue outlet, flashing that crosses the roof and chimney cap to protect against bad weather conditions.

If you decide to use the classic masonry exhaust provide a union tee with inspection cap and suitable supporting brackets. If the flue outlet is too big, it is necessary to insert a stainless steel or porcelain-coated steel tube with suitable diameter.

Seal area where the inlet and outlet part of the smoke exhaust meets the wall. It is strictly forbidden to apply mesh to the end of the outlet tube, as it could cause the appliance to malfunction.

If the smoke tube is installed in a fixed position, it is advisable to provide inspection openings for clean-out purposes especially in the horizontal sections.

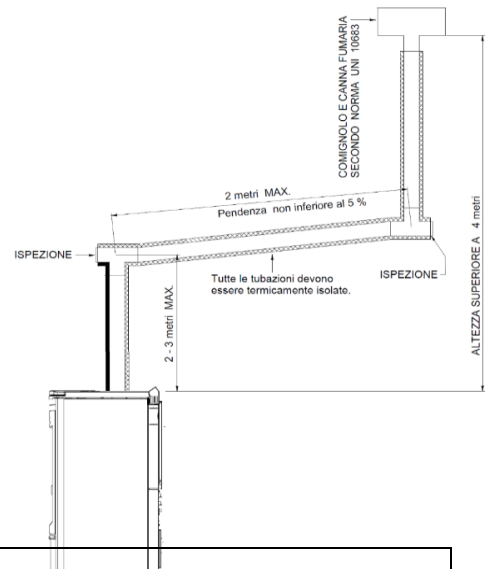

| LEGENDA   | KEY   |
|---|---|
| COMIGNOLO E CANNA FUMARIA SECONDO NORMA UNI 10683     | CHIMNEY CAP AND FLUE OUTLET ACCORDING TO UNI 10683 STANDARD |
| 2 -3 metri MAX  | 2 -3 metres MAX.  |
| 2 metri MAX   | 2 metres MAX  |
| Pendenza 3-5%   | Slope 3-5%  |
| ALTEZZA SUPERIORE A 4 m                               | HEIGHT MORE THAN 4 m  |
| Tutte le tubazioni devono essere termicamente isolate | All the pipes must be thermally insulated                   |
| ISPEZIONE   | INSPECTION  |

See the diagram. These openings are essential to allow for the removal of ash and unburned products which tend to accumulate along the discharge path. Seal the fittings with red silicone (resistant to 350°C).

The outer casing of the tube must be made with insulating material (mineral wool, ceramic fibre) or use pre-insulated tubing.

**THE FLUE OUTLET MUST BE USED ONLY FOR THE APPLIANCE.**

It must be possible to inspect and remove all the smoke tube sections for clean-out purposes.



**ATTENTION:** if the flue outlet is not sufficiently insulated and /or if it is too long it could generate condensation. It is advisable to provide a condensation drain near the smoke outlet of the appliance. The appliance must always and only be installed in a single flue outlet system dedicated exclusively to the appliance.

If the generator is connected to a non-compliant flue system the appliance could rapidly deteriorate due to an abnormal, continuous overheating; in this case the damaged parts will not be covered by warranty.

**IF THE CHIMNEY CATCHES FIRE CLOSE THE PRIMARY AND SECONDARY AIR LEVERS IMMEDIATELY AND CALL THE FIRE BRIGADE**

**8 – PROBLEMS, CAUSES AND SOLUTIONS**

| <b>PROBLEM</b>  | <b>CAUSE</b>  | <b>SOLUTION</b>   |
|---|---|---|
| Difficulty in lighting the cooker.  | Blocked grate.  | Clean the grate.  |
|   | Moist wood or too thick.  | Use smaller sized and more seasoned wood.   |
|   | Poor draught.   | Clean the ash pan.<br>Thoroughly clean the flue gas path and the flue outlet<br>Check the flue pipe:<br>• for constrictions<br>• too many curves<br>• bad insulation<br>• section too small   |
| Smoke in the room.<br><br>Difficulty maintaining the fire.<br><br>Difficulty heating.<br><br>Flame insensitive to draft variations.<br><br>Puffs while operating. | Poor draught.   | Clean the ash pan and all the inspection drawers. Thoroughly clean the flue gas path.<br>Clean (or have someone clean) the flue.<br>Check the flue pipe:<br>• for constrictions<br>• too many curves<br>• bad insulation<br>• section too small |
|   | No air in the room.   | Create an adequate opening for the air.   |
|   | Moist wood or too thick.  | Use smaller sized and more seasoned wood.   |
| <b>PROBLEM</b>  | <b>CAUSE</b>  | <b>SOLUTION</b>   |
| The fuel is burning too quickly, uncontrolled combustion.   | Excessive draught.  | Reduce draught of the flue outlet by installing a suitable device (e.g. draught regulator).   |
| Broken components inside the combustion chamber.  | Excessive consumption of wood, more than the amount indicated in this manual. | Contact a service centre to restore the appliance for a fee, then use the appliance as instructed in this manual and comply with all the supplied instructions.   |
|   | Incorrect use of the appliance.   |   |
|   | No or poor cleaning of the appliance.   |   |

**IF THE RECOMMENDED REMEDIES DO NOT SOLVE THE PROBLEM CONTACT A QUALIFIED TECHNICAL ASSISTANCE SERVICE.**

## 9 – WARRANTY TERMS AND CONDITIONS

### POINT 1A

Every Thermorossi product is delivered with this warranty certificate. This warranty is to be considered a **conventional guarantee** as defined in art. 133 of Italian Legislative Decree no. 206 dated 6 September 2005 (so-called Consumer Code). This warranty does not in any way affect the rights expressly granted to the consumer concerning the sale of consumer goods as set forth in Italian Legislative Decree no. 206/2005. The consumer is therefore always entitled to exercise these rights with the seller, under the terms and conditions established by the aforementioned legislative decree and by this conventional guarantee.

This warranty is valid only in the case where the product is purchased for domestic uses (i.e. the subject is a consumer as defined in art. 3 paragraph 1, point A of Italian legislative decree 206/2005) and, in any case, not for business or professional purposes. Barring the cases provided for by law, it is the responsibility of the purchaser to demonstrate any product defects and should such product be found to be fully functional, the warranty will be considered inapplicable. The warranty is valid only if the product is installed, used and serviced in accordance with all the instructions provided in the use, maintenance and installation guide delivered with the product.

#### **This warranty certificate is valid solely for the parts mentioned herein.**

The warranty is valid for 24 months for the product, excluding the components expressly indicated in point 1C herein. Thermorossi is therefore not responsible for demonstrating the full functionality of the system to which the product is connected, which remains the customer's responsibility. The warranty is subject to the limits and exclusions specified in this warranty certificate and exclusively under the conditions stated herein. In any case, for a warranty claim to be taken into consideration, the customer must report the non-conformity to the seller in writing no later than two months from the date of its identification. The warranty is null and void if this deadline is not respected. The purchaser is responsible for demonstrating that this warranty is valid; this can be done by presenting a delivery document issued by the seller or another document (receipt, till receipt or similar...) indicating the name of the seller, the product identification details (e.g. model code) and the date of the sale or delivery date if later.

Therefore, for the warranty to be valid, the above documentation must be kept by the consumer and shown when the product is being inspected/repaired. This warranty is valid solely under the following conditions:

- all product installation or connection operations are carried out by personnel qualified in accordance with law, who must issue an appropriate declaration of conformity attesting that the work has been carried out according to best practices and scrupulously following the instructions provided in the use, maintenance and installation guide delivered with the product and the regulations regarding systems and safety.
- all operations involving the use of the product, as well as periodic maintenance, must be carried out according to the instructions and indications provided in the use, maintenance and installation guide delivered with the product.
- all repairs to the product must be carried out by personnel of Thermorossi S.p.A. authorised service centres;
- only original Thermorossi spare parts, accessories and consumables must be used.

The warranty **(if present)** on the **vitrified body** lasts 8 years from the invoice date.

The warranty **(if present)** on the **standard wet body** lasts 4 years from the invoice date.

Both the warranty on the vitrified body and that on the standard wet body, if present, only cover the internal surface of the combustion chamber in contact with combustion gases, notwithstanding the limits and exclusions listed in this warranty certificate and exclusively in the conditions hereby reported. It shall not apply if the product was not installed by a qualified technician who has verified that all characteristics of the system are suitable. Such characteristics must comply with the legislation on safety and systems. It shall not apply if the product is connected to a system that may cause corrosion, deposits or breakage due to stray currents, condensation, water aggressiveness or acidity, improper descaling treatments, lack of water, sludge or limescale deposits. Failing to connect the system circulating pump to the specific terminal block in the generator causes the warranty to be immediately declared null and void. The system must necessarily guarantee a return water temperature exceeding 55°C.

### POINT 1B

Components damaged by causes and/or events external to the product are excluded from this warranty.

The warranty does not apply to damage caused by: excessive or insufficient flue outlet draught, lack of maintenance, failure to clean the product, atmospheric and chemical agents, corrosion of any type and/or nature, fuel overloads, fire, cleaning, tampering with the product, parts damaged due to overheating caused by a lack of maintenance or excess fuel load.

### POINT 1C

The following components are excluded from the warranty: door ceramic glass, majolica tile parts, refractory materials, painted or galvanised parts, enamelled parts, gaskets, knobs, handles, thermometers and consumables in general. Warranty replacement does not imply any resetting of the conventional guarantee or its extension. Colour variations on the majolica tiles and the presence of crazing or spotting are not a reason for claims because they are natural characteristics of the materials themselves. Parts found to be defective due to negligence or careless use, damage during transport, incorrect maintenance, or incorrect installation, are not covered by the warranty.

**POINT 1E**

This warranty is valid only in Italy. To find your nearest assistance centre, please visit the official Thermorossi website at the following address: [www.thermorossi.com](http://www.thermorossi.com).

**POINT 2A**

The technical assistance centre will take appropriate action as soon as possible in the event of failure of the product to function. In this regard, no compensation shall be due for damage or problems following forced inactivity of the product. Repairs or replacements carried out under this conventional guarantee do not imply any resetting of the conventional guarantee or its extension. Thermorossi will repair the product if possible and this is not too costly for the company. The product will only be replaced if it is objectively impossible to repair it and its replacement is not too costly. The product will not be replaced if external factors have caused evident malfunctions. For the purposes of this conventional guarantee, replacement of the product shall be considered too costly if it entails unreasonable expenses compared to its repair, taking into account the estimated value of the product without the defect, the seriousness of the non-conformity and the possibility of repairs being carried out without significantly inconveniencing the consumer. If technical assistance is provided by the personnel of the technical assistance centres at the customer's request, and such assistance is provided outside the warranty (e.g. because the warranty is not valid, because the customer has not sent the warranty certificate in the set times, or because the part is excluded from this warranty), the costs of such assistance will be charged in full to the customer.

These costs include:

Call-out fee, the cost of labour and any parts to be replaced. These costs will be of a reasonable amount and the customer can ask the assistance centre for an indication of the amounts in advance. In any case, it should be noted that requests for assistance "under warranty" which, based on the report and analysis carried out by the assistance centre, are the result of tampering, negligence or non-compliant installation, lack of cleaning or in any case not falling within the scope of this conventional guarantee, will entail:

Call-out fee, the cost of labour and any parts to be replaced. These costs will be of a reasonable amount and the customer can ask the assistance centre for an indication of the amounts in advance.

**POINT 2B**

Thermorossi S.p.A. declines liability for any damage directly or indirectly caused to persons, animals or property, due to or related to installation that does not comply in full with current regulations and/or installation, use and maintenance that does not comply in full with all the instructions contained in the installation, use and maintenance guide delivered with the product.







**THERMOROSSI** 

*Fire Lovers*

THERMOROSSI S.p.A.

Via Grumolo, 4 (Z.I.) 36011 Arsiero (VI) - ITALY

Fax 0445.741657 - [www.thermorossi.com](http://www.thermorossi.com) - [info@thermorossi.it](mailto:info@thermorossi.it)